

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 November 2005 (10.11.2005)

PCT

(10) International Publication Number  
**WO 2005/105180 A1**

(51) International Patent Classification<sup>7</sup>: **A61M 3/02**

(21) International Application Number:  
PCT/GB2005/001612

(22) International Filing Date: 27 April 2005 (27.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0409443.9 28 April 2004 (28.04.2004) GB

(71) Applicant (for all designated States except US): **SMITH & NEPHEW, PLC** [GB/GB]; 15 Adam Street, London WC2N 6LA (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BLOTT, Patrick,**


**Lewis** [GB/GB]; 16 Hodsow Fields, Barmby Moor, York YO24 4ER (GB). **HARTWELL, Edward, Yerbury** [GB/GB]; 3 Haven Garth, Brough, Hull HU15 1EP (GB). **LEE-WEBB, Julian** [GB/GB]; 37 Moor Lane, Copmanthorpe, York YO23 3TJ (GB). **NICOLINI, Derek** [GB/GB]; 38 Castle Rise, South Cave, Brough HU15 2ET (GB).

(74) Agent: **DRAGGETT, Peter, Thornton**; Smith & Nephew, York Science Park, Heslington, York YO10 5DF (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: APPARATUS FOR ASPIRATING, IRRIGATING AND/OR CLEANSING OF WOUNDS

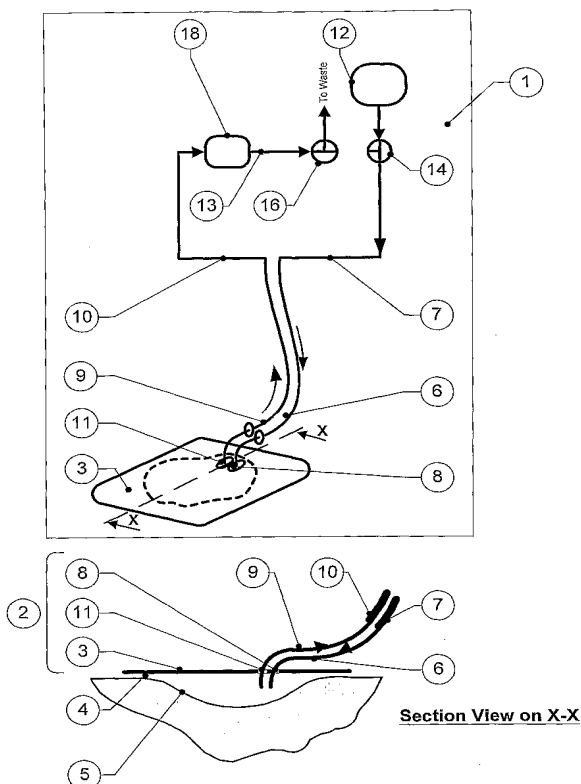

(57) Abstract: An apparatus (1) for cleansing wounds (5) in which irrigant fluid from a reservoir (12) connected to a conformable wound dressing (2) and wound exudate from the dressing are moved by a device (which may be a single pump or two pumps) for moving fluid through a flow path which passes through the dressing and a means for providing simultaneous aspiration and irrigation of the wound, and means for supplying physiologically active agents to the wound. The former provides a desired balance of fluid at a controlled nominal flow rate that removes materials deleterious to wound healing, while distributing materials that are beneficial in promoting wound healing over the wound bed. The latter maintains physiologically active agents at a level that promotes wound healing.



**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## APPARATUS FOR ASPIRATING, IRRIGATING AND/OR CLEANSING OF WOUNDS

The present invention relates to apparatus and a medical wound dressing for aspirating, irrigating and/or cleansing wounds, and a method of treating  
5 wounds using such apparatus for aspirating, irrigating and/or cleansing wounds.

It relates in particular to such an apparatus, wound dressing and method that can be easily applied to a wide variety of, but in particular chronic,  
10 wounds, to cleanse them of materials that are deleterious to wound healing, whilst distributing materials that are beneficial in some therapeutic aspect, in particular to wound healing.

Aspirating and/or irrigating apparatus are known, and tend to be used to  
15 remove wound exudate during wound therapy. In known forms of such wound therapy, aspiration and irrigation of the wound take place sequentially.

Each part of the therapy cycle is beneficial in promoting wound healing:

20 Aspiration applies a negative pressure to the wound, which is beneficial in itself in promoting wound healing by removing materials deleterious to wound healing with the wound exudate, reducing bacterial load, combating peri-wound oedema, increasing local blood flow to the wound and  
25 encouraging the formation of wound bed granulation tissue.

Irrigation cleanses wounds of materials that are deleterious to wound healing by diluting and moving wound exudate (which is typically relatively little fluid and may be of relatively high viscosity and particulate-filled).

30 Additionally, relatively little of beneficial materials involved in promoting wound healing (such as cytokines, enzymes, growth factors, cell matrix components, biological signalling molecules and other physiologically active components of the exudate) are present in a wound, and are not well  
35 distributed in the wound, i.e. they are not necessarily present in parts of the wound bed where they can be potentially of most benefit. These may be distributed by irrigation of the wound and thus aid in promoting wound healing.

The irrigant may additionally contain active materials that are potentially or actually beneficial in respect of wound healing. These may be distributed by irrigation of the wound and thus aid in promoting wound healing.

- 5 If aspiration and irrigation therapy is applied sequentially to a wound, the two therapies, each of which is beneficial in promoting wound healing, can only be applied intermittently.

10 Thus, the wound will lose the abovementioned known beneficial effects of aspiration therapy on wound healing, at least in part, while that aspiration is suspended during irrigation.

15 Additionally, for a given aspirate flow, whilst materials that are potentially or actually deleterious in respect of wound healing are removed from wound exudate, the removal in a given time period of application of the total irrigate and/or aspirate therapy will normally be less effective and/or slower than with continuous application of aspiration.

20 Even less to be desired, is that while aspiration is not applied to the wound, wound exudate and materials deleterious to wound healing (such as bacteria and debris, and iron II and iron III and for chronic wounds proteases, such as serine proteases) will pool on the wound bed and hinder wound healing, especially in a highly exuding wound. The influx of local oedema will also add to the chronicity of the wound. This is especially the  
25 case in chronic wounds.

Depending on the relative volumes of irrigant and wound exudate, the mixed exudate-irrigant fluid and may be of relatively high viscosity and/or particulate-filled. Once it is present and has pooled, it may be more difficult  
30 to shift by the application of aspiration in a conventional sequential aspirate – irrigate – dwell cycle than with continuous simultaneous aspiration of the wound, owing to the viscosity and blockage in the system.

35 The wound will also lose the abovementioned beneficial effects of irrigation therapy on wound healing, at least in part, while that irrigation is suspended during aspiration.

These benefits in promoting wound healing include the movement of materials that are beneficial in promoting wound healing, such as those mentioned above.

- 5 Additionally, for a given irrigant flow, the cleansing of the wound and the distribution by irrigation of the wound of such beneficial materials in a given time period of application of the total irrigate and/or aspirate therapy when such therapy is in a conventional sequential aspirate – irrigate – dwell cycle will normally be less effective and/or slower than with continuous  
10 application of aspiration.

Such known forms of aspiration and/or irrigation therapy systems also often create a wound environment that may result in the loss of optimum performance of the body's own tissue healing processes, and slow healing  
15 and/or in weak new tissue growth that does not have a strong three-dimensional structure adhering well to and growing from the wound bed. This is a significant disadvantage, in particular in chronic wounds.

The relevant devices tend not to be portable.

- 20 It thus would be desirable to provide a system of aspiration and irrigation therapy for a wound, which can remove wound exudate and materials deleterious to wound healing from contact with the wound bed,  
25 whilst simultaneously cleansing it and distributing materials that are beneficial in promoting wound healing across it, and supplying in the irrigant active amounts of materials that are beneficial in promoting wound healing which pass into and/or through the wound in contact with the wound bed.

- 30 It is an object of the present invention
- a) to obviate at least some of the disadvantages of known aspiration and/or irrigation therapy systems, and
  - b) to provide a system of therapy which can remove materials deleterious to wound healing from wound exudate, whilst retaining materials that  
35 are beneficial in promoting wound healing in contact with the wound bed, and

- c) further supplies fluids containing active amounts of materials that are beneficial in promoting wound healing to pass into and/or through the wound in contact with the wound bed.

5 It is a yet further object of the present invention

- a) to obviate at least some of the abovementioned disadvantages of known aspiration and/or irrigation systems, and
- b) is portable.

10 Vascular supply to, and aspiration in, tissue underlying and surrounding the wound is often compromised.

It is a further object of the present invention to provide a system of therapy that also promotes vascular supply to tissue underlying and surrounding a  
15 wound, promoting wound healing.

Thus, according to a first aspect of the present invention there is provided an apparatus for aspirating, irrigating and/or cleansing wounds, comprising

- a) a fluid flow path, comprising a conformable wound dressing, having  
20 a backing layer which is capable of forming a relatively fluid-tight seal or closure over a wound and  
at least one inlet pipe for connection to a fluid supply tube, which passes through and/or under the wound-facing face, and  
and at least one outlet pipe for connection to a fluid offtake tube, which  
25 passes through and/or under the wound-facing face,  
the point at which the or each inlet pipe and the or each outlet pipe passes through and/or under the wound-facing face forming a relatively fluid-tight seal or closure over the wound;
- b) a fluid reservoir connected by a fluid supply tube to an inlet pipe via  
30 optional means for supply flow regulation;
- c) means for supplying physiologically active agents to the wound; and
- d) at least one device for moving fluid through the wound dressing;  
characterised in that it comprises

35

e) means for providing simultaneous aspiration and irrigation of the wound, such that fluid may be supplied to fill the flowpath from the fluid reservoir via the fluid supply tube (optionally via means for supply flow regulation) while fluid is aspirated by a device through the fluid offtake tube (optionally or as necessary via means for aspirate flow regulation).

Where any pipe is described in connection with the apparatus as being connected or for connection to a (mating end of a) tube, e.g. a fluid supply tube, fluid recirculation tube or fluid offtake tube, the pipe and the tube may form a single integer in the flow path through which the circulating fluid from the wound passes.

The present invention in this aspect provides several advantages.

One is that application of an irrigant to a wound under simultaneous aspiration creates a wound environment that is exposed to the continuous beneficial effects of both aspects of the therapy for wound healing, as opposed to the sequential intermittent application of irrigant flow and aspiration in known aspirating and/or irrigating apparatus. The latter result in less than optimum performance of the body's own tissue healing processes, and slower healing and/or weaker tissue growth that does not have a strong three-dimensional structure adhering well to and growing from the wound bed. This is a significant disadvantage, in particular in chronic wounds.

Thus, the use of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds retains and enhances the beneficial effects of aspiration in respect of wound healing by continuous and preferably constant aspiration. These include removing materials deleterious to wound healing with the wound exudate, reducing bacterial load, combating peri-wound oedema and encouraging the formation of wound bed granulation tissue.

Preferred embodiments of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing chronic wounds apply a milder negative pressure than in conventional negative pressure therapy (which is too aggressive for the fragile tissues of many such wounds). This  
5 leads to increased patient comfort, and lessens the risk of inflammation of the wound.

The removal of wound exudate in a given time period of application of the total irrigate and/or aspirate therapy will normally be more effective and/or  
10 faster than with a conventional sequential intermittent aspiration and/or irrigation therapy.

Even more desirably, since simultaneous aspiration and irrigation is applied to the wound, wound exudate and materials deleterious to wound healing  
15 (such as bacteria and debris, and iron II and iron III and for chronic wounds proteases) will not pool on the wound bed and hinder wound healing, especially in a highly exuding wound. This is especially important in chronic wounds.

20 The resulting mixed exudate-irrigant fluid will usually be of relatively lower viscosity.

Because simultaneous aspiration and irrigation of the wound provides continuous removal at a constant relatively high speed, the fluid does not  
25 have to be accelerated cyclically from rest, and will be easier to shift than with known forms of aspiration and/or irrigation therapy systems with a conventional sequential aspirate – irrigate – dwell cycle.

This will thus exert a greater net effect on the removal of adherent bacteria  
30 and debris.

This is especially the case in those embodiments of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds where there is an inlet manifold (as described in further  
35 detail hereinafter)

a) that covers and contacts most of the wound bed



- b) with openings that deliver the fluid directly to the wound bed over an extended area.

5 It will be seen that the balance of fluid between fluid aspirated from the wound and irrigant supplied to the wound from the fluid reservoir may provide a predetermined steady state concentration equilibrium of materials beneficial in promoting wound healing over the wound bed.

10 Simultaneous aspiration of wound fluid and irrigation at a controlled flow rate aids in the attainment and maintenance of this equilibrium

The present form of aspiration and/or irrigation therapy systems thus creates a wound environment for better distribution of materials that are beneficial in some therapeutic aspect, in particular to wound healing, that are present in a wound, but may not be well distributed in the wound, e.g. in a highly exuding wound. (These include cytokines, enzymes, growth factors, cell matrix components, biological signalling molecules and other physiologically active components of the exudate.) and/or materials in the irrigant that are potentially or actually beneficial in respect of wound healing, such as those noted below in this regard, e.g. growth factors and other physiologically active materials.

25 These may aid wound cell proliferation and new tissue growth that has a strong three-dimensional structure adhering well to and growing from the wound bed. This is a significant advantage, in particular in chronic wounds.

30 This is especially the case in those embodiments of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds where there is an inlet manifold as described below. This covers and contacts most of the wound bed with openings that deliver the fluid directly to the wound bed over an extended area.

Simultaneous aspiration and irrigation of the wound provides advantages over topical bolus instillation, such as the pooled delivery of fluid to the wound bed by the application of a conventional sequential aspirate – irrigate – dwell cycle. These include (in addition to greater bioavailability to all areas of the wound surface as above), prolonged delivery between dressing changes and optimal dosing.

In the latter case, sequentially irrigating and aspirating a wound means the need to flood the wound with one or more static fluid physiologically active component in higher dosage concentration than is necessary to achieve a therapeutically active level of such actives on the wound bed.

This is just to maintain a desired average therapeutically active level of such actives on the wound bed during the dwell time period of sequentially irrigating and aspirating a wound, since these dosage concentrations levels tend to drop during this dwell time period in the cycle.

It will be seen that normally the level of such actives is effectively reduced to zero by the conventional sequential subsequent aspiration of the wound.

Less desirably, it has been observed that some of such physiologically active components, for example factors such as TGF $\beta$  show different effects at high and low concentrations. An unnecessarily high dose to ensure activity during the residence between typical bolus instillations in conventional sequential irrigation - aspiration of the wound may result in less than optimum dosing and performance of the body's own tissue healing processes.

Even less desirably, some of such physiologically active components may have adverse effects at higher concentrations. An unnecessarily high dose to ensure activity during the residence between typical bolus instillations in conventional sequential operation may result in undesirable effects on the wound bed.

All of this may result in slow healing and/or slowing down of the healing and growth lacking a strong three-dimensional structure adhering well to and growing from the wound bed. This is a significant disadvantage, in particular in chronic wounds.

5

Some embodiments of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds with supply to the wound bed under a positive pressure may be advantageous.

- 10 Application of a positive pressure to the wound under the backing layer may make it possible to flood the tissue underlying the wound with one or more physiologically active components in therapeutically active amounts. This may promote greater wound healing than by treatment with static fluid physiologically active component(s) alone or by sequential intermittent  
15 application of irrigant flow and aspiration

The prolonged delivery of such physiologically active components in therapeutically active amounts in a precise and time-controlled manner by simultaneous aspiration and irrigation, together with

- 20 a) the removal of materials deleterious to wound healing from wound exudate,  
b) without substantially diluting materials that are beneficial in promoting wound healing in contact with the wound bed, and  
c) the continuously supply and recirculation of such materials to the  
25 wound,  
promotes greater wound healing than  
i) by treatment with the fluid physiologically active component(s) alone, or  
ii) by topical bolus instillation in known aspirating and irrigating apparatus.

- 30 The supply of physiologically active materials may be effected at any appropriate point for this purpose along the apparatus flow path. It is often convenient to effect such supply to the wound via the fluid passing through the wound dressing from irrigant in the fluid reservoir that contains them.

35

Thus, one embodiment of the apparatus for irrigating, cleansing and/or aspirating wounds of the present invention is characterised in that it comprises an irrigant fluid in the fluid reservoir which in turn comprises one or more physiologically active components in amounts to promote wound healing.

Examples of such components (however supplied) include:

autologous, allogeneic or xenogeneic blood or blood products, such as platelet lysates, plasma or serum.

10 natural purified proteins or recombinant-produced protein growth factors, such as platelet derived growth factor (PDGF), vascular endothelial growth factor (VEGF), transforming growth factor alpha ( $TGF\alpha$ ) or transforming growth factor beta ( $TGF\beta$ -1, 2 or 3), basic-fibroblast growth factor (b-FGF also known as FGF2), epidermal growth factor (EGF), granulocyte-macrophage colony-stimulating factor (GM-CSF); insulin like growth factor-1 (IGF-1) and keratinocyte growth factor 2 KGF2 (also known as FGF7);  
15 natural purified proteins or recombinant produced protein cytokines such as the interleukin  $1\beta$  ( $IL1\beta$ ), or interleukin 8 (IL-8) and  
other physiologically active agents whether present normally in acute or  
20 chronic wounds, that can be augmented in the irrigant fluid to be of benefit to the wound bed, when such therapy is applied, and combinations thereof.

An additional embodiment of the apparatus for irrigating, cleansing and/or aspirating wounds of the present invention is characterised in the  
25 physiologically active components in amounts to promote wound healing comprise materials that are beneficial in promoting wound healing by removing materials or by regulating, limiting or inhibiting processes deleterious to wound healing from wound exudate.

30 Examples of such materials include  
natural purified proteins or recombinant-produced protein, proteinase inhibitors, such as tissue inhibitors of metalloproteinases (TIMP 1 to 4) and alpha 1-antitrypsin (AAT), aprotinin,  $\alpha$ -2-macroglobulin;

35

antibodies or chemically synthesised molecules at inappropriate levels that inhibit or inactivate processes or materials deleterious to wound healing from wound exudate, such as matrix metalloproteinases (MMPs), neutrophil elastase, inhibitors of new blood vessel formation (angiogenesis) such as  
5 thrombospondin or kallistatin and combinations thereof.

The irrigant may alternatively or additionally, where appropriate, deliver a steady supply of natural purified proteins or recombinant-produced protein debriding agents to remove and limit eschar, necrotic cells and tissues from  
10 the wound bed. Examples of such include streptokinase, plasmin, trypsin, collagenases, and other selective proteases or fibrinolytic factors and combinations thereof.

The irrigant supplied to the wound dressing, optionally under a positive pressure on the wound bed, may alternatively or additionally, where  
15 appropriate, contain antioxidants, such as ascorbic acid or stable derivatives thereof and free radical scavengers, such as glutathione or natural purified proteins or recombinant-produced proteins such as superoxide dismutase (SOD) or  
20 free radical generators (such as hydrogen peroxide) to balance the oxidative stress and oxidant potential of the wound bed in order to maximise the opportunity for wound healing.

The irrigant supplied to the wound dressing under a negative or positive  
25 pressure on the wound bed may alternatively or additionally, where appropriate, contain nutrients for wound cells to aid proliferation or migration or the synthesis of matrix components or factors beneficial to wound healing, such as sugars, amino acids, purines, pyrimidines, vitamins, metal ions or minerals, or any such ingredients that may be found  
30 in either serum containing or serum-free cell culture medium or might be used as nutritional supplements.

The irrigant supplied to the wound dressing under a negative or positive pressure on the wound bed may alternatively or additionally, where appropriate, contain medicaments, such as antimicrobials, examples of which include antibacterial agents, for example triclosan, iodine, metronidazole, cetrimide, chlorhexidine acetate; antifungal agents, for example sodium undecylenate, chlorhexidine, iodine or clotrimoxazole; antibiotics such as ciprofloxacin or clindamycin.

The irrigant supplied to the wound dressing under a negative or positive pressure on the wound bed may alternatively or additionally, where appropriate, include local analgesics/anaesthetics, such as lignocaine, bupivacaine, or diclofenac to reduce wound pain or pain associated with the dressing:

The irrigant supplied to the wound dressing under a negative or positive pressure on the wound bed may alternatively or additionally, where appropriate supply materials to achieve the delivery of nucleic acid molecules as active genes or gene-containing vectors (DNA, RNA or modified versions thereof), as naked molecules, molecules complexed with nucleic acid binding carriers, molecules within liposomes or as virus vectors to give steady, measured delivery of gene therapeutic molecules to wound bed cells.

The apparatus for irrigating and/or aspirating wounds of the present invention may be used cyclically and/or with reversal of flow.

Preferably the present apparatus for aspirating, irrigating and/or cleansing wounds is a conventionally automated, programmable system which can cleanse the wound with minimal supervision.

The means for providing simultaneous aspiration and irrigation of the wound often comprises a (first) device for moving fluid through the wound applied to fluid downstream of and away from the wound dressing, in combination with at least one of

a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing;  
means for aspirate flow regulation, connected to a fluid offtake tube, and  
means for supply flow regulation, connected to a fluid supply tube;

5

The (first) device will apply negative pressure (i.e. below-atmospheric pressure or vacuum) to the wound bed. It may be applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing.

10 Alternatively or additionally, where appropriate, the aspirate in the fluid offtake tube downstream of the wound dressing may be aspirated into a collection vessel, and the first device may act on fluid such as air from the collection vessel.

15 The (first) device may be a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, and/or means for supply flow regulation, connected to a fluid supply tube, in each case, e.g. a regulator, such as a rotary valve.

20

Alternatively, where appropriate the (first) device for moving fluid through the wound may be a variable-throughput device, such as a variable-speed pump, downstream of the wound dressing, thus effectively forming a combination of a (first) device for moving fluid through the wound with  
25 means for aspirate flow regulation and/or means for supply flow regulation in a single integer.

25

The (first) device for moving fluid through the wound will often be a pump of any of the following types, or a piped supply of vacuum, applied to fluid  
30 downstream of and away from the wound dressing. In the case of any pump it may be a fixed-speed pump, with (as above) a discrete means for aspirate flow regulation, connected to a fluid offtake tube, and/or means for supply flow regulation, connected to a fluid supply tube, in each case, e.g. a regulator, such as a rotary valve. Alternatively, where appropriate the  
35 pump may be a variable-throughput or variable-speed pump.

30

35

The following types of pump may be used as the (first) device:

reciprocating pumps, such as piston pumps - where pistons pump fluids through check valves, in particular for positive and/or negative pressure on the wound bed; and

- 5 diaphragm pumps - where pulsations of one or two flexible diaphragms displace fluid with check valves.

and

rotary pumps, such as:

progressing cavity

- 10 pumps - with a cooperating screw rotor and stator, in particular for higher-viscosity and particulate-filled exudate; and  
vacuum pumps - with pressure regulators.

- 15 The (first) device may be a diaphragm pump, e.g. preferably a small portable diaphragm pump. This is a preferred type of pump, in order in particular to reduce or eliminate contact of internal surfaces and moving parts of the pump with (chronic) wound exudate, and for ease of cleaning.

- 20 Where the pump is a diaphragm pump, and preferably a small portable diaphragm pump, the one or two flexible diaphragms that displace liquid may each be, for example a polymer film, sheet or membrane, that is connected to means for creating the pulsations. This may be provided in any form that is convenient, inter alia as a piezoelectric transducer, a core of a solenoid or a ferromagnetic integer and coil in which the direction of  
25 current flow alternates, a rotary cam and follower, and so on.

- Where any second device is applied to the fluid in the fluid supply tube upstream of and towards the wound dressing, it will usually apply positive pressure (i.e. above-atmospheric pressure) to the wound bed.

30

As with the (first) device, it may be a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for supply flow regulation, connected to a fluid supply tube, e.g. a regulator, such as a rotary valve.

35



Alternatively, where appropriate the second device for moving irrigant fluid to the wound may be a variable-throughput device, such as a variable-speed pump, upstream of the wound dressing, thus effectively forming a combination of a second device for moving fluid through the wound with means for supply flow regulation in a single integer.

The second device for moving fluid through the wound will often be a pump of any of the following types applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing. It may be a fixed-speed pump, with (as above) a discrete means for supply flow regulation, connected to a fluid supply tube, e.g. a regulator, such as a rotary valve. Alternatively, where appropriate the pump may be a variable-throughput or variable-speed pump.

- 15 The following types of pump may be used as the second device:
- reciprocating pumps, such as
  - shuttle pumps - with an oscillating shuttle mechanism to move fluids at rates from 2 to 50 ml per minute
  - and
  - 20 rotary pumps, such as:
  - centrifugal pumps
  - flexible impeller pumps - where elastomeric impeller traps fluid between impeller blades and a moulded housing that sweeps fluid through the pump housing.
  - 25 peristaltic pumps - with peripheral rollers on rotor arms acting on a flexible fluid aspiration tube to urge fluid current flow in the tube in the direction of the rotor.
  - rotary vane pumps - with rotating vaned disk attached to a drive shaft moving fluid without pulsation as it spins. The outlet can be restricted without damaging the pump.
  - 30

The second device may be a peristaltic pump, e.g. preferably a small portable peristaltic pump. This is a preferred type of pump, in order in particular to reduce or eliminate contact of internal surfaces and moving parts of the pump with irrigant, and for ease of cleaning.

Where the pump is a peristaltic pump, this may be e.g. an Instech Model P720 miniature peristaltic pump, with a flow rate: of 0.2 – 180ml/hr and a weight of < 0.5 k. This is potentially useful for home and field hospital use.

- 5 Each such pump of any these types may also suitably be one that is capable of pulsed, continuous, variable and/or automated and/or programmable fluid movement. Less usually and less preferably, each such pump of any these types will be reversible.
- 10 As above, the means for supply flow regulation may be a regulator, such as a rotary valve. This is connected between two parts of a fluid supply tube, such that the desired supply flow regulation is achieved.

- 15 If there are two or more inlet pipes, these may be connected to a single fluid supply tube with a single regulator, or to first, second, etc. fluid supply tubes, respectively having a first regulator, a second regulator, etc., e.g. a valve or other control device for admitting fluids into the wound.

- 20 As above, the means for aspirate flow regulation may be similarly provided in a form in which concomitant aspirate flow regulation is possible. It may be a regulator, such as a valve or other control device, e.g. a rotary valve.

- 25 Multiple offtake tubes may be similarly provided with single or multiple regulators, all for aspiration of fluids from the apparatus, e.g. to a aspirate collection vessel, such as a collection bag.

- 30 If there is no second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing, it is only possible to apply a negative pressure to the wound, by means of the device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing.

- 35 Operation may e.g. be carried out at a negative pressure of up to 50%atm., typically at a low negative pressure of up to 20% atm., more usually up to 10% atm. at the wound, as is described hereinafter.

Examples of suitable and preferred (first) devices include those types of pump that are so described hereinbefore in relation to the first device. This may be a diaphragm pump, e.g. preferably a small portable diaphragm pump. This is a preferred type of pump, in order in particular to reduce or eliminate contact of internal surfaces and moving parts of the pump with (chronic) wound exudate, and for ease of cleaning.

Alternatively, if it is desired to apply a net positive pressure to the wound, the means for providing simultaneous aspiration and irrigation of the wound must comprise not only a first device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing, but also a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing.

Operation may then e.g. be carried out at a positive pressure of up to 50%atm., typically at a low positive pressure of up to 20% atm., more usually up to 10% atm. at the wound, as is described hereinafter.

Examples of suitable and preferred first devices include those types of pump that are so described hereinbefore in relation to the first device. This may be a diaphragm pump, e.g. preferably a small portable diaphragm pump.

This is a preferred type of pump, in order in particular to reduce or eliminate contact of internal surfaces and moving parts of the pump with (chronic) wound exudate, and for ease of cleaning.

Examples of suitable and preferred second devices include those types of pump that are so described hereinbefore in relation to the second device. This may be a peristaltic pump, e.g. a miniature peristaltic pump. This is a preferred type of pump, in order to eliminate contact of internal surfaces and moving parts of the pump with irrigant in the fluid supply tube upstream of and towards the wound dressing, and for ease of cleaning.

It is of course equally possible to apply a negative pressure to the wound, by means of such a combination of

a first device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing,

5 and

a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing;

optionally with

means for supply flow regulation, connected to a fluid supply tube;

10 means for aspirate flow regulation, connected to a fluid offtake tube.

Indeed, as noted below in this regard, preferred embodiments of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing chronic wounds that apply a negative pressure

15 include such types of combination of

a first device, e.g. a diaphragm pump, e.g. preferably a small portable diaphragm pump, and

a second device, e.g. a peristaltic pump, preferably a miniature peristaltic pump,

20 as described hereinbefore in relation to the device for moving fluid through the wound.

As noted above, either of the first device and the second device may be

25 a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, and/or means for supply flow regulation, connected to a fluid

supply tube, in each case, e.g. a regulator, such as a rotary valve, or

a variable-throughput device, such as a variable-speed pump, downstream of the wound dressing, thus effectively forming a combination of a (first)

30 device for moving fluid through the wound with means for aspirate flow regulation and/or means for supply flow regulation in a single integer.

The higher end of the ranges of % positive and negative pressure noted above are potentially more suitable for hospital use, where they may only

35 be used safely under professional supervision.

The lower end is potentially more suitable for home use, where relatively high % positive and negative pressures cannot be used safely without professional supervision, or for field hospital use.

- 5 In each case, the pressure on the wound may be held constant throughout the desired length of therapy, or may be varied cyclically in a desired positive or negative pressure regime.

- 10 As noted above, when it is desired to apply a negative pressure to the wound, it is preferred that the means for providing simultaneous aspiration and irrigation of the wound comprise not only  
a (first) device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing, but also  
15 a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing.

- Accordingly, one embodiment of the apparatus for irrigating, cleansing and/or aspirating wounds of the present invention is characterised in the  
20 means for providing simultaneous aspiration and irrigation of the wound comprises  
a (first) device for moving fluid through the wound applied to fluid downstream of and away from the wound dressing, and  
a second device for moving fluid through the wound applied to the irrigant in  
25 the fluid supply tube upstream of and towards the wound dressing, and  
in combination with at least one of  
means for supply flow regulation, connected to a fluid supply tube, and  
means for aspirate flow regulation, connected to a fluid offtake tube.

- 30 As noted above, either of the first device and the second device may be a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, and/or means for supply flow regulation, connected to a fluid supply tube, in each case, e.g. a regulator, such as a rotary valve, or

a variable-throughput device, such as a variable-speed pump, downstream of the wound dressing, thus effectively forming a combination of a (first) device for moving fluid through the wound with means for aspirate flow regulation and/or means for supply flow regulation in a single integer.

5

This combination of

- a) a device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing, and
  - 10 b) a device for moving fluid through the wound applied to the fluid in the fluid supply tube upstream of and towards the wound dressing,
- may be used to apply an overall positive or negative, or even zero pressure to the wound.

- 15 At least one body in the flow path to, over and from the wound bed should have sufficient resilience against the pressure to allow any significant compression or decompression of the fluid occur.

- 20 Thus, examples of suitable bodies include those which are or are defined by a film, sheet or membrane, such as inlet or offtake and/or tubes and structures such as bags, chambers and pouches, filled with irrigant fluid, and e.g. the backing layer of the wound dressing, made of elastically resilient thermoplastic materials.

- 25 It will be seen that the balance of fluid between aspirated fluid from the wound and irrigant supplied to the wound from the fluid reservoir will thus be largely determined by a means for providing simultaneous aspiration and irrigation of the wound which is a system comprising:

- a) means for aspirate flow regulation and/or a device for moving fluid 30 through the wound applied to fluid downstream of and away from the wound dressing, and
- b) means for supply flow regulation and/or a device for moving fluid through the wound applied to the fluid in the fluid supply tube upstream of and towards the wound dressing.

35

As noted above, either of the first device and the second device may be a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, and/or means for supply flow regulation, connected to a fluid supply tube, in each case, e.g. a regulator, such as a rotary valve, or a variable-throughput device, such as a variable-speed pump, downstream of the wound dressing, thus effectively forming a combination of a (first) device for moving fluid through the wound with means for aspirate flow regulation and/or means for supply flow regulation in a single integer.

The same means may be used to apply an overall positive or negative, or even neutral pressure to the wound.

The appropriate flow rate through the supply tube will depend on a number of factors, such as

the viscosity and consistency of each of the irrigant, exudate and mixed exudate-irrigant fluid, and any changes as the wound heals;

the level of negative pressure on the wound bed,

whether the irrigant in the fluid supply tube upstream of and into the wound dressing is under positive pressure, and the level of such pressure;

the level of any pressure drop between the irrigant in the fluid supply tube upstream of the wound dressing and the wound bed, such as across a porous element, e.g. a membrane wound contact layer on the lower surface of an inlet manifold that delivers the fluid directly to the wound bed; means for supply flow regulation; and/or a second device for moving fluid through the wound applied to the fluid in the fluid supply tube upstream of and towards the wound dressing;

the depth and/or capacity of the wound and

the power consumption needed for a given desired fluid volume flow rate of irrigant and/or wound exudate through the wound.

The dressing may comprise an inlet manifold (as described in further detail hereinafter) that covers and contacts most of the wound bed with openings that deliver the fluid directly to the wound bed over an extended area, in the form of one or more inflatable hollow bodies defined by a film sheet or membrane.

The (usually small) positive pressure above atmospheric from the irrigation device when both devices are running together should be sufficient to inflate the manifold.

- 5 The desired fluid volume flow rate of irrigant and/or wound exudate is preferably that for optimum performance of the wound healing process.

10 The flow rate will usually be in the range of 1 to 1500 ml/hr, such as 5 to 1000 ml/hr, e.g. 15 to 300 ml/hr, such as 35 to 200 ml/hr through the supply tube. The flow rate through the wound may be held constant throughout the desired length of therapy, or may be varied cyclically in a desired flow rate regime.

15 In practice, the offtake rate of flow of total irrigant and/or wound exudate will be of the order of 1 to 2000, e.g. 35 to 300 ml/24 hr/cm<sup>2</sup>, where the cm<sup>2</sup> refers to the wound area, depending on whether the wound is in a highly exuding state.

20 In practice, the rate of exudate flow is only of the order of up to 75 microlitres / cm<sup>2</sup> / hr (where cm<sup>2</sup> refers to the wound area), and the fluid can be highly mobile or not, depending on the level of proteases present). Exudate levels drop and consistency changes as the wound heals, e.g. to a level for the same wound that equates to 12.5 – 25 microlitres / cm<sup>2</sup> / hr.

- 25 It will be seen that the aspirated fluid from the wound will typically contain a preponderance of irrigant from the fluid reservoir over wound exudate.

The necessary adjustments to maintain the desired balance of fluid by means of

- 30 a) the means for aspirate flow regulation and/or downstream device, and  
b) the means for supply flow regulation and/or upstream device for moving fluid

will be apparent to the skilled person, bearing in mind that as noted above, either of the first device and the second device may be



a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, and/or means for supply flow regulation, connected to a fluid supply tube, in each case, e.g. a regulator, such as a rotary valve, or

- 5 a variable-throughput device, such as a variable-speed pump, downstream of the wound dressing, thus effectively forming a combination of a (first) device for moving fluid through the wound with means for aspirate flow regulation and/or means for supply flow regulation in a single integer.

- 10 The type and/or capacity of  
a suitable first device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing and/or

- 15 a suitable second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing and/or

will be largely determined by

- a) the appropriate or desired fluid volume flow rate of irrigant and/or wound exudate from the wound, and  
20 b) whether it is appropriate or desired to apply a positive or negative pressure to the wound bed, and the level of such pressure to the wound bed

for optimum performance of the wound healing process, and by factors such as portability, power consumption and isolation from contamination.

- 25 As noted above, when it is desired to apply a negative pressure to the wound with the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds to provide simultaneous aspiration and irrigation of the wound, the means for providing  
30 simultaneous aspiration and irrigation of the wound may comprise  
a single device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing or  
in combination with at least one of  
means for supply flow regulation, connected to a fluid supply tube, and  
35 means for aspirate flow regulation, connected to a fluid offtake tube.

As noted above, the device may be

a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, e.g. a regulator, such as a rotary valve, or

5 a variable-throughput device, such as a variable-speed pump, downstream of the wound dressing, thus effectively forming a combination of a device for moving fluid through the wound with means for aspirate flow regulation in a single integer.

10 The operation of a typical apparatus of this type for simultaneous aspiration and irrigation of a wound at a low negative pressure of up to 20% atm., more usually up to 10% atm. at the wound, with one pump will now be described.

15 Before starting the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds, the backing layer of the wound dressing is applied over the wound and conformed to the shape of the bodily part in which the wound is to form a relatively fluid-tight seal or closure.

20

The means for supply flow regulation, connected to a fluid supply tube, such as a regulator, such as a rotary valve, is usually closed, and the means for aspirate flow regulation (if any), connected to a fluid offtake tube, is opened.

25

The aspiration pump is started and run to give a negative pressure of up to 50% atm., more usually up to 20% atm., e.g. up to 10% atm. to be applied applies a vacuum to the interior of the dressing and the wound.

30 The means for fluid supply regulation is opened and is then adjusted, and/or where the aspiration pump is a variable-speed pump, downstream of the wound dressing, that is adjusted, to maintain the desired balance of fluid at a controlled nominal flow rate and to maintain the desired negative pressure in the interior of the wound dressing.

35

The apparatus is then run for the desired length of therapy and with the desired negative pressure regime.

After this period, the aspiration pump is stopped.

5

The operation of a typical apparatus for simultaneous aspiration and irrigation of a wound at a low negative pressure of up to 20% atm., more usually up to 10% atm. at the wound, with two pumps will now be described.

10

The necessary changes where the mode of operation is at a net positive pressure of e.g. up to 15% atm., more usually up to 10% atm. at the wound will be apparent to the skilled person.

15

Such a typical apparatus for simultaneous aspiration and irrigation of a wound at a low negative pressure of up to 20% atm., more usually up to 10% atm. at the wound comprises means for providing simultaneous aspiration and irrigation of the wound which is a combination of

- 20 a) a first device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing, with optional means for aspirate flow regulation, connected to a fluid offtake tube: and
- 25 b) a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing, with optional means for supply flow regulation, connected to a fluid supply tube.

25

As noted above, either device may be

- 30 a fixed-throughput device, such as a fixed-speed pump, which will usually require a discrete means for aspirate flow regulation, connected to a fluid offtake tube, e.g. a regulator, such as a rotary valve, or for irrigant flow regulation, connected to a fluid supply tube, either e.g. a regulator, such as a rotary valve, or

30

a variable-throughput device, such as a variable-speed pump, thus effectively forming a combination of a device for moving fluid through the wound with means for flow regulation in a single integer.

- 5 Before starting the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds, the backing layer of the wound dressing is applied over the wound and conformed to the shape of the bodily part in which the wound is to form a relatively fluid-tight seal or closure.

10

Any means for supply flow regulation, connected to a fluid supply tube, such as a regulator, such as a rotary valve, is usually closed, and any means for aspirate flow regulation, connected to a fluid offtake tube, is opened.

15

The aspiration pump is started and run to apply a negative pressure of up to 50% atm., more usually up to 20% atm., e.g. up to 10% atm., to the interior of the dressing and the wound.

- 20 The irrigation pump is then started, so that both pumps are running together, and any means for supply flow regulation is opened.

The irrigation pump flow rate and any means for fluid supply regulation are then adjusted and/or where the aspiration pump and/or the irrigation pump is a variable-speed pump, either or both is/are is adjusted, to maintain the desired balance of fluid at a controlled nominal flow rate and to maintain the desired negative pressure in the interior of the wound dressing.

25

- 30 The apparatus is then run for the desired length of therapy and with the desired pressure regime.

After this period, the irrigation pump is stopped, shortly followed by the aspiration pump.

35

In all embodiments of the apparatus of this first aspect of the present invention for aspirating, irrigating and/or cleansing wounds, a particular advantage is the tendency of the wound dressing to conform to the shape of the bodily part to which it is applied.

5

The wound dressing comprises a backing layer with a wound-facing face which is capable of forming a relatively fluid-tight seal or closure over a wound and

10

at least one inlet pipe for connection to a fluid supply tube or tube, which passes through and/or under the wound-facing face, and

and at least one outlet pipe for connection to a fluid offtake tube, which passes through and/or under the wound-facing face,

the point at which the or each inlet pipe and the or each outlet pipe passes through and/or under the wound-facing face forming a relatively fluid-tight

15

seal or closure.

The term 'relatively fluid-tight seal or closure' is used herein to indicate one which is fluid- and microbe-impermeable and permits a positive or negative pressure of up to 50% atm., more usually up to 20% atm., e.g. up to 10% atm. to be applied to the wound. The term 'fluid' is used herein to include gels, e.g. thick exudate, liquids, e.g. water, and gases, such as air, nitrogen, etc.

20

The shape of the backing layer that is applied may be any that is appropriate to aspirating, irrigating and/or cleansing the wound across the area of the wound.

25

Examples of such include a substantially flat film, sheet or membrane, or a bag, chamber, pouch or other structure of the backing layer, e.g. of polymer film, which can contain the fluid.

30

The backing layer may be a film, sheet or membrane, often with a (generally uniform) thickness of up to 100 micron, preferably up to 50 micron, more preferably up to 25 micron, and of 10 micron minimum thickness.

35

Its largest cross-dimension may be up to 500 mm (for example for large torso wounds), up to 100 mm (for example for axillary and inguinal wounds), and up to 200 mm for limb wounds (for example for chronic wounds, such as venous leg ulcers and diabetic foot ulcers).

5

Desirably the dressing is resiliently deformable, since this may result in increased patient comfort, and lessen the risk of inflammation of a wound.

10

Suitable materials for it include synthetic polymeric materials that do not absorb aqueous fluids, such as polyolefins, such as polyethylene e.g. high-density polyethylene, polypropylene, copolymers thereof, for example with vinyl acetate and polyvinyl alcohol, and mixtures thereof; polysiloxanes; polyesters, such as polycarbonates; polyamides, e.g. 6-6 and 6 - 10, and hydrophobic polyurethanes.

15

They may be hydrophilic, and thus also include hydrophilic polyurethanes.

20

They also include thermoplastic elastomers and elastomer blends, for example copolymers, such as ethyl vinyl acetate, optionally or as necessary blended with high-impact polystyrene.

25

They further include elastomeric polyurethane, particularly polyurethane formed by solution casting.

Preferred materials for the present wound dressing include thermoplastic elastomers and curable systems.

30

The backing layer is capable of forming a relatively fluid-tight seal or closure over the wound and/or around the inlet and outlet pipe(s).

35

However, in particular around the periphery of the wound dressing, outside the relatively fluid-tight seal, it is preferably of a material that has a high moisture vapour permeability, to prevent maceration of the skin around the wound. It may also be a switchable material that has a higher moisture vapour permeability when in contact with liquids, e.g. water, blood or wound exudate. This may, e.g. be a material that is used in Smith & Nephew's Allevyn™, IV3000™ and OpSite™ dressings.

The periphery of the wound-facing face of the backing layer may bear an adhesive film, for example, to attach it to the skin around the wound.

5 This may, e.g. be a pressure-sensitive adhesive, if that is sufficient to hold the wound dressing in place in a fluid-tight seal around the periphery of the wound-facing face of the wound dressing.

10 Alternatively or additionally, where appropriate a light switchable adhesive could be used to secure the dressing in place to prevent leakage. (A light switchable adhesive is one the adhesion of which is reduced by photocuring. Its use can be beneficial in reducing the trauma of removal of the dressing.)

15 Thus, the backing layer may have a flange or lip extending around the proximal face of the backing layer, of a transparent or translucent material (for which it will be understood that materials that are listed above are amongst those that are suitable).

20 This bears a film of a light switchable adhesive to secure the dressing in place to prevent leakage on its proximal face, and a layer of opaque material on its distal face.

25 To remove the dressing and not cause excessive trauma in removal of the dressing, the layer of opaque material on the distal face of the flange or lip extending around the proximal wound is removed prior to application of radiation of an appropriate wavelength to the flange or lip.

30 If the periphery of the wound dressing, outside the relatively fluid-tight seal, that bears an adhesive film to attach it to the skin around the wound, is of a material that has a high moisture vapour permeability or is a switchable material, then the adhesive film, if continuous, should also have a high or switchable moisture vapour permeability, e.g. be an adhesive such as used in Smith & Nephew's Allevyn™, IV3000™ and OpSite™ dressings.

Where a vacuum, is applied to hold the wound dressing in place in a fluid-tight seal around the periphery of the wound-facing face of the wound dressing, the wound dressing may be provided with a silicone flange or lip to seal the dressing around the wound. This removes the need for adhesives and associated trauma to the patient's skin.

Where the interior of, and the flow of irrigant and/or wound exudate to and through, the dressing is under any significant positive pressure, which will tend to act at peripheral points to lift and remove the dressing off the skin around the wound.

In such use of the apparatus, it may thus be necessary to provide means for forming and maintaining such a seal or closure over the wound against such positive pressure on the wound, to act at peripheral points for this purpose.

Examples of such means include light switchable adhesives, as above, to secure the dressing in place to prevent leakage.

Since the adhesion of a light switchable adhesive is reduced by photocuring, thereby reducing the trauma of removal of the dressing, a film of a more aggressive adhesive may be used, e.g. on a flange, as above.

Examples of suitable fluid adhesives for use in more extreme conditions where trauma to the patient's skin is tolerable include ones that consist essentially of cyanoacrylate and like tissue adhesives, applied around the edges of the wound and/or the proximal face of the backing layer of the wound dressing, e.g. on a flange or lip.

Further suitable examples of such means include adhesive (e.g. with pressure-sensitive adhesive) and non-adhesive, and elastic and non-elastic straps, bands, loops, strips, ties, bandages, e.g. compression bandages, sheets, covers, sleeves, jackets, sheathes, wraps, stockings and hose, e.g. elastic tubular hose or elastic tubular stockings that are a compressive fit over a limb wound to apply suitable pressure to it when the therapy is applied in this way; and inflatable cuffs, sleeves, jackets, trousers,



sheathes, wraps, stockings and hose that are a compressive fit over a limb wound to apply suitable pressure to it when the therapy is applied in this way.

- 5 Such means may each be laid out over the wound dressing to extend beyond the periphery of the backing layer of the wound dressing, and as appropriate will be adhered or otherwise secured to the skin around the wound and/or itself and as appropriate will apply compression (e.g. with elastic bandages, stockings) to a degree that is sufficient to hold the wound  
10 dressing in place in a fluid-tight seal around the periphery of the wound,

Such means may each be integral with the other components of the dressing, in particular the backing layer.

- 15 Alternatively, it may be permanently attached or releasably attached to the dressing, in particular the backing layer, with an adhesive film, for example, or these components may be a Velcro <sup>TM</sup>, push snap or twist-lock fit with each other.

- 20 The means and the dressing may be separate structures, permanently unattached to each other.

- In a more suitable layout for higher positive pressures on the wound, a stiff flange or lip extends around the periphery of the proximal face of the  
25 backing layer of the wound dressing as hereinbefore defined.

The flange or lip is concave on its proximal face to define a peripheral channel or conduit.

- 30 It has a suction outlet that passes through the flange or lip to communicate with the channel or conduit and may be connected to a device for applying a vacuum, such as a pump or a piped supply of vacuum.

- The backing layer may be integral with or attached, for example by heat-sealing, to the flange or lip extending around its proximal face.  
35

To form the relatively fluid-tight seal or closure over a wound that is needed and to prevent passage of irrigant and/or exudate under the periphery of the wound-facing face of the wound dressing, in use of the apparatus, the dressing is set on the skin around the wound.

5

The device then applies a vacuum to the interior of the flange or lip, thus forming and maintaining a seal or closure acting at peripheral points around the wound against the positive pressure on the wound.

- 10 With all the foregoing means of attachment, and means for forming and maintaining a seal or closure over the wound, against positive or negative pressure on the wound at peripheral points around the wound, the wound dressing sealing periphery is preferably of a generally round shape, such as an ellipse, and in particular circular.

15

To form the relatively fluid-tight seal or closure over a wound and around the inlet pipe(s) and outlet pipe(s) at the point at which they pass through and/or under the wound-facing face, the backing layer may be integral with these other components.

20

The components may alternatively just be a push, snap or twist-lock fit with each other, or adhered or heat-sealed together.

- 25 The or each inlet pipe or outlet pipe may be in the form of an aperture, such as a funnel, hole, opening, orifice, luer, slot or port for connection as a female member respectively to a mating end of a fluid tube and/or fluid supply tube (optionally or as necessary via means for forming a tube, pipe or hose, or nozzle, hole, opening, orifice, luer, slot or port for connection as a male member respectively to a mating end of a fluid tube and/or fluid supply tube (optionally or as necessary via means for supply flow regulation) or
- 30 a fluid offtake tube.

- 35 Where the components are integral they will usually be made of the same material (for which it will be understood that materials that are listed above are amongst those that are suitable).

Where, alternatively, they are a push, snap or twist-lock fit, they may be of the same material or of different materials. In either case, materials that are listed above are amongst those that are suitable for all the components.

- 5 The or each pipe will generally pass through, rather than under the backing layer. In such case, the backing layer may often have a rigid and/or resiliently inflexible or stiff area to resist any substantial play between the or each pipe and the or each mating tube, or deformation under pressure in any direction.

10

It may often be stiffened, reinforced or otherwise strengthened by a boss projecting distally (outwardly from the wound) around each relevant tube, pipe or hose, or nozzle, hole, opening, orifice, luer, slot or port for connection to a mating end of a fluid tube and/or fluid supply tube or fluid  
15 offtake tube.

Alternatively or additionally, where appropriate the backing layer may have a stiff flange or lip extending around the proximal face of the backing layer to stiffen, reinforce or otherwise strengthen the backing layer.

20

The wound dressing may not comprise any integer under the backing layer in the wound in use.

- 25 However, this may not provide a system to distribute irrigant over a sufficient functional surface area to irrigate the wound at a practical rate to be suitable for use, in particular in chronic wound aspiration and irrigation, with relatively high concentrations of materials that are deleterious to wound healing.

- 30 It may be advantageous to provide a system where wound irrigant may be distributed more evenly, or pass in a more convoluted path under the dressing over the wound bed.

35

Accordingly, one form of the dressing is provided with a 'tree' form of pipes, tubes or tubules that radiate from an inlet manifold to the wound bed to end in apertures and deliver the aspirating fluid directly to the wound bed via the apertures. Similarly, there is an outlet manifold from which tubules radiate and run to the wound bed to end in openings and collect the fluid directly from the wound bed.

The pipes, etc. may radiate regularly or irregularly through the wound in use, respectively from the inlet or outlet manifold, although regularly may be preferred. A more suitable layout for deeper wounds is one in which the pipes, etc. radiate hemispherically and concentrically, to the wound bed.

For shallower wounds, examples of suitable forms of such layout of the pipes, etc. include ones in which the pipes, etc. radiate in a flattened hemiellipsoid and concentrically, to the wound bed.

Other suitable forms of layout of the pipes, etc. include one which have pipes, tubes or tubules extending from the inlet pipe(s) and/or outlet pipe(s) at the point at which they pass through and/or under the wound-facing face of the backing layer to run over the wound bed. These may have a blind bore with perforations, apertures, holes, openings, orifices, slits or slots along the pipes, etc.

These pipes, etc. then effectively form an inlet pipe manifold that delivers the aspirating fluid directly to the wound bed or outlet pipe or collects the fluid directly from the wound respectively.

It does so via the holes, openings, orifices, slits or slots in the tubes, pipes, tubules, etc. over most of the wound bed under the backing layer.

It may be desirable that the tubes, pipes or tubules are resiliently flexible, e.g. elastomeric, and preferably soft, structures with good conformability in the wound and the interior of the wound dressing.

When the therapy is applied in this way, the layout of the tubes, pipes, tubules, etc. may depend on the depth and/or capacity of the wound.

Thus, for shallower wounds, examples of suitable forms of such layout of the tubes, pipes, tubules, etc. include ones that consist essentially of one or more of the tubes, etc in a spiral.

- 5 A more suitable layout for deeper wounds when the therapy is applied in this way may be one which comprises one or more of the tubes, etc in a helix or spiral helix.

- 10 Other suitable layouts for shallower wounds include one which have blind-bore, perforated inlet pipe or outlet pipe manifolds that aspirate fluid in the wound when the dressing is in use.

One or both of these may be such a form, the other may be, e.g. one or more straight blind-bore, perforated radial tubes, pipes or nozzles.

- 15 A preferred form of inlet pipe (or less usually) outlet pipe manifold that delivers the aspirating fluid directly to the wound bed or collects the fluid directly from the wound respectively is one that comprise one or more conformable hollow bodies defined by a film, sheet or membrane, such as a  
20 bag, chamber, pouch or other structure, filled with the irrigant (or less usually) aspirate from the wound, passing through perforations, apertures, holes, openings, orifices, slits or slots in the film, sheet or membrane defining the hollow body or hollow bodies.

- 25 These may be of small cross-dimension, so that they may then effectively form microperforations, microapertures or pores in a permeable integer, for example the polymer film, sheet or membrane.

- 30 This type of manifold for irrigation (more usually) provides the highest uniformity in the flow distribution of irrigant over the wound at a practical rate to be suitable for use, in particular in chronic wound aspiration and irrigation, and hence to provide a system where materials that are beneficial in promoting wound healing, such as growth factors, cell matrix components, and other physiologically active components of the exudate  
35 from a wound, are distributed more evenly under the dressing over the wound bed.

This type of manifold for irrigation (more usually) is noted below with regard to wound fillers under the backing layer, since it is a resiliently flexible, e.g. elastomeric, and soft, structure with good conformability to wound shape.

5 It is urged by its own resilience against the backing layer to apply gentle pressure on the wound bed, and is therefore also capable of acting as a wound filler. The film, sheet or membrane, often has a (generally uniform) thickness similar to that of films or sheets used in conventional wound dressing backing layers.

10 Another suitable layout is one in which an inlet pipe and/or outlet pipe manifold that delivers the aspirating fluid directly to the wound bed or collects the fluid directly from the wound respectively via inlet and/or outlet tubes, pipes or tubules,  
15 and the inlet manifold and/or outlet manifold is formed by slots in layers permanently attached to each other in a stack, and the inlet and/or outlet tubes, pipes or tubules are formed by apertures through layers permanently attached to each other in a stack. (In Figure 10a there is shown an exploded isometric view of such a stack, which is  
20 non-limiting.)

As also mentioned herein, the backing layer that is applied may be any that is appropriate to the present system of therapy and permits a positive or negative pressure of up to 50% atm., more usually up to 25% atm. to be  
25 applied to the wound.

It is thus often a microbe-impermeable film, sheet or membrane, which is substantially flat, depending on any pressure differential on it, and often with a (generally uniform) thickness similar to such films or sheets used in  
30 conventional wound dressings, i.e. up to 100 micron, preferably up to 50 micron, more preferably up to 25 micron, and of 10 micron minimum thickness.

35 The backing layer may often have a rigid and/or resiliently inflexible or stiff area to resist any substantial play between other components that are not

mutually integral, and may be stiffened, reinforced or otherwise strengthened, e.g. by a projecting boss.

5 Such a form of dressing would not be very conformable to the wound bed, and may effectively form a chamber, hollow or cavity defined by a backing layer and the wound bed under the backing layer.

10 It may be desirable that the interior of the wound dressing conform to the wound bed, even for a wound in a highly exuding state. Accordingly, one form of the dressing is provided with a wound filler under the backing layer.

This is favourably a resiliently flexible, e.g. elastomeric, and preferably soft, structure with good conformability to wound shape.

15 It is urged by its own resilience against the backing layer to apply gentle pressure on the wound bed.

20 The wound filler may be integral with the other components of the dressing, in particular the backing layer.

Alternatively, it may be permanently attached to them/it, with an adhesive film, for example, or by heat-sealing, e.g. to a flange or lip extending from the proximal face, so as not to disrupt the relatively fluid-tight seal or closure over the wound that is needed.

25 Less usually, the wound filler is releasably attached to the backing layer, with an adhesive film, for example, or these components may be a push, snap or twist-lock fit with each other.

30 The wound filler and the backing layer may be separate structures, permanently unattached to each other.

35 The wound filler may be or comprise a solid integer, favourably a resiliently flexible, e.g. elastomeric, and preferably soft, structure with good conformability to wound shape.

Examples of suitable forms of such wound fillers are foams formed of a suitable material, e.g. a resilient thermoplastic.

5 Preferred materials for the present wound dressing include reticulated filtration polyurethane foams with small apertures or pores.

Alternatively or additionally, it may be in the form of, or comprise one or more conformable hollow bodies defined by a film, sheet or membrane, such as a bag, chamber, pouch or other structure, filled with a fluid or solid  
10 that urges it to the wound shape.

The film, sheet or membrane, often has a (generally uniform) thickness similar to that of films or sheets used in conventional wound dressing backing layers.  
15

That is, up to 100 micron, preferably up to 50 micron, more preferably up to 25 micron, and of 10 micron minimum thickness, and is often resiliently flexible, e.g. elastomeric, and preferably soft.

20 Such a filler is often integral with the other components of the dressing, in particular the backing layer, or permanently attached to them/it, with an adhesive film, for example, or by heat-sealing, e.g. to a flange

25 Examples of suitable fluids contained in the hollow body or bodies defined by a film, sheet or membrane include gases, such as air, nitrogen and argon, more usually air, at a small positive pressure above atmospheric; and liquids, such as water, saline.

30 Examples also include gels, such as silicone gels, e.g. CaviCare™ gel, or preferably cellulosic gels, for example hydrophilic cross-linked cellulosic gels, such as Intrasisite™ cross-linked materials.

35 Examples also include aerosol foams, where the gaseous phase of the aerosol system is air or an inert gas, such as nitrogen or argon, more usually air, at a small positive pressure above atmospheric; and solid particulates, such as plastics crumbs.



Of course, if the backing layer is a sufficiently conformable and/or e.g. an upwardly dished sheet, the backing layer may lie under the wound filler, rather than vice versa.

- 5 In this type of layout, in order for the wound filler to urge the wound dressing towards the wound bed, it will usually have to be firmly adhered or otherwise releasably attached to the skin around the wound. This is especially the case in those embodiments where the wound filler and the backing layer are separate structures, permanently unattached to each other.
- 10

In such a layout for deeper wounds when the therapy is applied in this way, the means for such attachment may also form and maintain a seal or closure over the wound.

- 15 Where the filler is over the backing layer, and the fluid inlet pipe(s) and outlet pipe(s) pass through the wound-facing face of the backing layer, they may run through or around the wound filler over the backing layer.

- 20 One form of the dressing is provided with a wound filler under the backing layer that is or comprises a resiliently flexible, e.g. elastomeric, and preferably soft, hollow body defined by a film, sheet or membrane, such as a bag, chamber, pouch or other structure.

- 25 It has apertures, holes, openings, orifices, slits or slots, or tubes, pipes, tubules or nozzles. It communicates with at least one inlet or outlet pipe through at least one aperture, hole, opening, orifice, slit or slot.

- The fluid contained in the hollow body may then be the aspirating fluid in the apparatus.
- 30

- The hollow body or each of the hollow bodies then effectively forms an inlet pipe or outlet pipe manifold that delivers the aspirating fluid directly to the wound bed or collects the fluid directly from the wound respectively via the holes, openings, orifices, slits or slots, or the tubes, pipes or hoses, etc. in the film, sheet or membrane.
- 35

When the therapy is applied in this way, the type of the filler may also be largely determined by the depth and/or capacity of the wound.

5 Thus, for shallower wounds, examples of suitable wound fillers as a component of a wound dressing include ones that consist essentially of one or more conformable hollow bodies defining an inlet pipe and/or outlet pipe manifold that delivers the aspirating fluid directly to the wound bed or collects the fluid directly from the wound.

10 A more suitable wound filler for deeper wounds when the therapy is applied in this way may be one which comprises one or more conformable hollow bodies defined by, for example a polymer film, sheet or membrane, that at least partly surround(s) a solid integer. This may provide a system with better rigidity for convenient handling.

15 Unless the wound filler under the backing layer effectively forms an inlet pipe or outlet pipe manifold, in order for aspiration and/or irrigation of the wound bed to occur, it is appropriate for one or more bores, channels, conduits, passages, pipes, tubes, tubules and/or spaces, etc. to run from  
20 the point at which the fluid inlet pipe(s) and outlet pipe(s) pass through and/or under the wound-facing face of the backing layer through or around the wound filler under the backing layer.

25 Less usually, the wound filler is an open-cell foam with pores that may form such bores, channels, conduits, passages and/or spaces through the wound filler under the backing layer.

Where the filler is or comprises one or more conformable hollow bodies defined by, for example a polymer film, sheet or membrane, it may be  
30 provided with means for admitting fluids to the wound bed under the wound dressing.

These may be in the form of pipes, tubes, tubules or nozzles running from the point at which the fluid inlet pipe(s) and outlet pipe(s) pass through  
35 and/or under the wound-facing face of the backing layer through or around the wound filler under the backing layer.

All of the suitable layouts for shallower wounds that comprise blind-bore, perforated inlet pipe or outlet pipe manifolds that aspirate fluid in the wound when the dressing is in use, that are described hereinbefore, may be used under a wound filler under the backing layer.

5

In brief, suitable layouts include ones where one or both manifolds are annular or toroidal (regular, e.g. elliptical or circular or irregular), optionally with blind-bore, perforated radial tubes, pipes or nozzles, branching from the annulus or torus; and/or

10 in a meandering, tortuous, winding, zigzag, serpentine or boustrophedonic (i.e. in the manner of a ploughed furrow) pattern, or defined by slots in and apertures through layers attached to each other in a stack.

15 The inlet and/or outlet tubes, the fluid tube and the fluid supply tube, etc. may be of conventional type, e.g. of elliptical or circular cross-section, and may suitably have a uniform cylindrical bore, channel, conduit or passage throughout their length, and suitably the largest cross-dimension of the bore may be up to 10 mm for large torso wounds, and up to 2 mm for limb  
20 wounds.

The tube walls should suitably thick enough to withstand any positive or negative pressure on them. However, the prime purpose of such tubes is to convey fluid irrigant and exudate through the length of the apparatus flow  
25 path, rather than to act as pressure vessels.

The tube walls may suitably be at least 25 micron thick.

30 The bore or any perforations, apertures, holes, openings, orifices, slits or slots along the pipes, etc. or in the hollow body or each of the hollow bodies may be of small cross-dimension.

They may then effectively form a macroscopic and/or microscopic filter for particulates including cell debris and micro-organisms, whilst allowing  
35 proteins and nutrients to pass through.

Such tubes, pipes or hoses, etc. through and/or around the filler, whether the latter is a solid integer and/or one or more resiliently flexible or conformable hollow bodies, are described in further detail hereinbefore in connection with the inlet pipe(s) and outlet pipe(s).

5

The whole length of the apparatus for aspirating, irrigating and/or cleansing wounds should be microbe-impermeable once the wound dressing is over the wound in use.

10 It is desirable that the wound dressing and the interior of the apparatus for aspirating, irrigating and/or cleansing wounds of the present invention is sterile.

15 The fluid may be sterilised in the fluid reservoir and/or the rest of the system in which the fluid moves by ultraviolet, gamma or electron beam irradiation.

This way, in particular reduces or eliminates contact of internal surfaces and the fluid with any sterilising agent.

20

Examples of other methods of sterilisation of the fluid also include e.g. the use of

ultrafiltration through microapertures or micropores, e.g. of 0.22 to 0.45 micron maximum cross-dimension, to be selectively impermeable to  
25 microbes; and

fluid antiseptics, such as solutions of chemicals, such as chlorhexidine and povidone iodine; metal ion sources, such as silver salts, e.g. silver nitrate; and hydrogen peroxide;

30 although the latter involve contact of internal surfaces and the fluid with the sterilising agent.

It may be desirable that the interior of the wound dressing, the rest of the system in which the fluid moves, and/or the wound bed, even for a wound in a highly exuding state, are kept sterile after the fluid is sterilised in the  
35 fluid reservoir, or that at least naturally occurring microbial growth is inhibited.

Thus, materials that are potentially or actually beneficial in this respect may be added to the irrigant initially, and as desired the amount is increased by continuing addition.

5

Examples of such materials include antibacterial agents (some of which are listed above), and antifungal agents.

10

Amongst those that are suitable are, for example triclosan, iodine, metronidazole, cetrimide, chlorhexidine acetate, sodium undecylenate, chlorhexidine and iodine.

15

Buffering agents, such as potassium dihydrogen phosphate/ disodium hydrogen phosphate, may be added to adjust the pH, as may local analgesics/anaesthetics, such as lidocaine/lignocaine hydrochloride, xylocaine (adrenoline, lidocaine) and/or anti-inflammatories, to reduce wound pain or inflammation or pain associated with the dressing.

20

In order to combat the deposition of materials in the flow path from the irrigant, a repellent coating may be used at any point or on any integer in the path in direct contact with the fluid, e.g. on the means for providing simultaneous aspiration and irrigation of the wound or any desired tube or pipe.

25

Examples of coating materials for surfaces over which the aspirating fluid passes include anticoagulants, such as heparin, and high surface tension materials, such as PTFE, and polyamides, which are useful for growth factors, enzymes and other proteins and derivatives.

30

The apparatus of the invention for aspirating, irrigating and/or cleansing wounds is provided with means for admitting fluids directly or indirectly to the wound under the wound dressing in the form of a fluid supply tube to a fluid reservoir.

35

The fluid reservoir may be of any conventional type, e.g. a tube, bag (such as a bag typically used for blood or blood products, e.g. plasma, or for infusion feeds, e.g. of nutrients), chamber, pouch or other structure, e.g. of polymer film, which can contain the irrigant fluid.

5

The reservoir may be made of a film, sheet or membrane, often with a (generally uniform) thickness similar to that of films or sheets used in conventional wound dressing backing layers, i.e. up to 100 micron, preferably up to 50 micron, more preferably up to 25 micron, and of 10 micron minimum thickness, and is often a resiliently flexible, e.g. elastomeric, and preferably soft, hollow body.

10

In all embodiments of the apparatus the type and material of the tubes throughout the apparatus of the invention for aspirating, irrigating and/or cleansing wounds and the fluid reservoir will be largely determined by their function.

15

To be suitable for use, in particular on chronic timescales, the material should be non-toxic and biocompatible, inert to any active components, as appropriate of the irrigant from the fluid reservoir and/or wound exudate in the apparatus flow path, and, in any use of a two-phase system aspiration and irrigation unit, of the dialysate that moves into the aspirating fluid in the apparatus.

20

When in contact with irrigant fluid, it should not allow any significant amounts of extractables to diffuse freely out of it in use of the apparatus.

25

It should be sterilisable by ultraviolet, gamma or electron beam irradiation and/or with fluid antiseptics, such as solutions of chemicals, fluid- and microbe-impermeable once in use, and flexible.

30

Examples of suitable materials for the fluid reservoir include synthetic polymeric materials, such as polyolefins, such as polyethylene, e.g. high-density polyethylene and polypropylene.

35

Suitable materials for the present purpose also include copolymers thereof, for example with vinyl acetate and mixtures thereof. Suitable materials for the present purpose further include medical grade poly(vinyl chloride).

- 5 Notwithstanding such polymeric materials, the fluid reservoir will often have a stiff area to resist any substantial play between it and components that are not mutually integral, such as the fluid supply tube towards the wound dressing, and may be stiffened, reinforced or otherwise strengthened, e.g. by a projecting boss.

10

Materials deleterious to wound healing that are removed include oxidants, such as free radicals, e.g. peroxide and superoxide; iron II and iron III;

- 15 all involved in oxidative stress on the wound bed;  
proteases, such as serine proteases, e.g. elastase and thrombin; cysteine proteases; matrix metalloproteases, e.g. collagenase; and carboxyl (acid) proteases;  
endotoxins, such as lipopolysaccharides;  
20 autoinducer signalling molecules, such as homoserine lactone derivatives, e.g. oxo-alkyl derivatives;  
inhibitors of angiogenesis such as thrombospondin-1 (TSP-1), plasminogen activator inhibitor, or angiostatin (plasminogen fragment);  
pro-inflammatory cytokines such as tumour necrosis factor alpha (TNF $\alpha$ )  
25 and interleukin 1 beta (IL-1 $\beta$ ),  
oxidants, such as free radicals, e.g. , e.g. peroxide and superoxide; and metal ions, e.g. iron II and iron III, all involved in oxidative stress on the wound bed.

- 30 It is believed that aspirating wound fluid aids in removal from of the materials deleterious to wound healing from wound exudate and/or irrigant, whilst distributing materials that are beneficial in promoting wound healing in contact with the wound.

A steady state concentration equilibrium of materials beneficial in promoting wound healing may be set up between in the irrigant and/or wound exudate.

5 Aspirating wound fluid aids in the quicker attainment of this equilibrium

Materials beneficial to wound healing that are distributed include cytokines, enzymes, growth factors, cell matrix components, biological signalling molecules and other physiologically active components of the exudate and/or

10 materials in the irrigant that are potentially or actually beneficial in respect of wound healing, such as nutrients for wound cells to aid proliferation, gases, such as oxygen.

15

The conduits through which respectively the irrigant and/or wound exudate passes to and from the wound dressing and

- i) may have means for modular disconnection and withdrawal of the dressing,
  - 20 ii) providing an immediate fluid-tight seal or closure over the ends of the conduits and the cooperating tubes in the rest of the apparatus of the invention so exposed,
- to prevent continuing passage of irrigant and/or exudate.

25 The outlet from the means for aspirate flow regulation and/or tubes may be collected and monitored and used to diagnose the status of the wound and/or its exudate.

Any aspirate collection vessel may be of any conventional type, e.g. a tube, 30 bag (such as a bag typically used as an ostomy bag), chamber, pouch or other structure, e.g. of polymer film, which can contain the irrigant fluid that has been bled off. In all embodiments of the apparatus, the type and material of the aspirate collection vessel will be largely determined by its function.

35



To be suitable for use, the material need only be fluid-impermeable once in use, and flexible.

5 Examples of suitable materials for the fluid reservoir include synthetic polymeric materials, such as polyolefins, such as poly (vinylidene chloride).

Suitable materials for the present purpose also include polyethylene, e.g. high-density polyethylene, polypropylene, copolymers thereof, for example with vinyl acetate and mixtures thereof.

10

In a second aspect of the present invention there is provided a conformable wound dressing, characterised in that it comprises a backing layer with a wound-facing face which is capable of forming a relatively fluid-tight seal or closure over a wound and has

15

at least one inlet pipe for connection to a fluid supply tube, which passes through and/or under the wound-facing face, and

at least one outlet pipe for connection to a fluid offtake tube, which passes through and/or under the wound-facing face,

the point at which the or each inlet pipe and the or each outlet pipe passes

20

through and/or under the wound-facing face forming a relatively fluid-tight seal or closure over the wound.

The dressing is advantageously provided for use in a bacteria-proof pouch.

25

Examples of suitable forms of such wound dressings are as described by way of example hereinbefore.

In a third aspect of the present invention there is provided a method of treating wounds to promote wound healing using the apparatus for aspirating, irrigating and/or cleansing wounds of the present invention.

30

The present invention will now be described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a schematic view of an apparatus for aspirating, irrigating and/or cleansing a wound according to the first aspect of the present invention that has

- 5 a single device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing, in combination with means for supply flow regulation, connected to a fluid supply tube, and means for aspirate flow regulation, connected to a fluid offtake tube.

- 10 Figure 2 is a schematic view of another apparatus for aspirating, irrigating and/or cleansing a wound according to the first aspect of the present invention that has

- a first device for moving fluid through the wound applied to the aspirate in the fluid offtake tube downstream of and away from the wound dressing,  
15 with means for aspirate flow regulation, connected to a fluid offtake tube; and

a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing.

- 20 Figures 3 to 7 are cross-sectional views of conformable wound dressings, of the second aspect of the present invention for aspirating and/or irrigating wounds.

- In these, Figures 3a to 7a are cross-sectional plan views of the wound dressings, and Figures 3b to 7b are cross-sectional side views of the  
25 wound dressings.

- Figures 8 to 10 are various views of inlet and outlet manifold layouts for the wound dressings of the second aspect of the present invention for  
30 respectively delivering fluid to, and collecting fluid from, the wound.

- Figures 11A to D are variants of a two-pump system with essentially identical, and identically numbered, components as in Figure 2, except that there is

- 35 a pump bypass loop (in all except Figure 11C)

a filter downstream of the aspirate collection vessel, and  
a bleed regulator, such as a rotary valve, connected to the fluid offtake tube  
or to the wound space, for the regulation of the positive or negative  
pressure applied to the wound.

5

Figures 12A to C are variants of a two-pump system with essentially  
identical, and identically numbered, components as in Figures 11, except  
that they have various means for varying the regulation of the positive or  
negative pressure applied to the wound.

10

Figures 13 to 26 are cross-sectional views of conformable wound  
dressings, of the second aspect of the present invention for aspirating  
and/or irrigating wounds.

15

Figure 27a is a plan view and Figure 27b a cross-sectional view  
of a further conformable wound dressings of the second aspect of the  
present invention for aspirating and/or irrigating wounds.

20

Figures 28A and B are variants of a two-pump system with essentially  
identical, and identically numbered, components as in Figures 11.

25

However, they have alternative means for handling the aspirate flow to the  
aspirate collection vessel under negative or positive pressure to the wound  
in simultaneous aspiration and irrigation of the wound, including in Figure  
27B a third device for moving fluid into a waste bag.

30

Figure 29 is a single-pump system essentially with the omission from the  
apparatus of Figures 11 of the second device for moving irrigant fluid into  
the wound dressing.

35

Referring to Figure 1, the apparatus (1) for aspirating, irrigating and/or  
cleansing wounds comprises  
a conformable wound dressing (2), having  
a backing layer (3) which is capable of forming a relatively fluid-tight seal or  
closure (4) over a wound (5) and

one inlet pipe (6) for connection to a fluid supply tube (7), which passes through the wound-facing face of the backing layer (5) at (8), and one outlet pipe (9) for connection to a fluid offtake tube (10), which passes through the wound-facing face at (11),

5 the points (8), (11) at which the inlet pipe and the outlet pipe passes through and/or under the wound-facing face forming a relatively fluid-tight seal or closure over the wound;

the inlet pipe being connected via means for supply flow regulation, here a valve (14), by the fluid supply tube (7) to a fluid reservoir (12), and

10 the outlet pipe (9) being connected via means for aspirate flow regulation, here a valve (16) and a fluid offtake tube (10) to waste, e.g. to a collection bag (not shown);

a device for moving fluid through the wound (5), here a diaphragm pump (18), e.g. preferably a small portable diaphragm pump, acting on the fluid

15 aspiration tube (13) to apply a low negative pressure on the wound; and the valve (14) in the fluid supply tube (7), the valve (16) in the fluid offtake tube (10), and the diaphragm pump (18), providing means for providing simultaneous aspiration and irrigation of the wound (5),

such that fluid may be supplied to fill the flowpath from the fluid reservoir via  
20 the fluid supply tube (via the means for supply flow regulation) and moved by the device through the flow path.

The operation of the apparatus is as described hereinbefore.

25 Referring to Figure 2, the apparatus (21) is a variant two-pump system with essentially identical, and identically numbered, components as in Figure 1, except that

there is no means for supply flow regulation in the fluid supply tube (7) from the fluid reservoir (12), and

30 there is

a first device for moving fluid through the wound (5), here a diaphragm pump (18A), e.g. preferably a small portable diaphragm pump, acting on the fluid aspiration tube (13) downstream of and away from the wound dressing to apply a low negative pressure on the wound; with

35 means for negative pressure regulation here a valve (16) connected to the vacuum tube (13) and a vacuum vessel (aspirate collection jar) (12A); and

a second device for moving fluid through the wound (17), here a peristaltic pump (18B), e.g. preferably a small portable diaphragm pump, applied to the irrigant in the fluid supply tube (7) upstream of and towards the wound dressing,

- 5 the first device (18A) and second device (18B), and the valve (16) in the vacuum tube (13), and the diaphragm pump (18A), providing means for providing simultaneous aspiration and irrigation of the wound (5), such that fluid may be supplied to fill the flowpath from the fluid reservoir via the fluid supply tube (via the means for supply flow regulation) and moved by the  
10 devices through the flow path.

The operation of the apparatus is as described hereinbefore

- 15 Referring to Figures 3 to 6, each dressing (41) is in the form of a conformable body defined by a microbe-impermeable film backing layer (42) with a uniform thickness of 25 micron.

- It has a wound-facing face (43) which is capable of forming a relatively  
20 fluid-tight seal or closure over a wound.

The backing layer (42) extends in use on a wound over the skin around the wound.

- On the proximal face of the backing layer (43) on the overlap (44), it bears  
25 an adhesive film (45), to attach it to the skin sufficiently to hold the wound dressing in place in a fluid-tight seal around the periphery of the wound-facing face (43) of the wound dressing.

- There is one inlet pipe (46) for connection to a fluid supply tube (not shown), which passes through and/or under the wound-facing face (43),  
30 and one outlet pipe (47) for connection to a fluid offtake tube (not shown), which passes through and/or under the wound-facing face (43),

- 35 Referring to Figures 3a and 3b, one form of the dressing is provided with a wound filler (48) under a circular backing layer (42).

This comprises a generally frustroconical, toroidal conformable hollow body, defined by a membrane (49) which is filled with a fluid, here air or nitrogen, that urges it to the wound shape.

- 5 The filler (48) may be permanently attached to the backing layer with an adhesive film (not shown) or by heat-sealing.

10 The inlet pipe (46) and outlet pipe (47) are mounted centrally in the backing layer (42) above the central tunnel (50) of the toroidal hollow body (48) and each passes through the backing layer (42).

Each extends in pipes (51) and (52) respectively through the tunnel (50) of the toroidal hollow body (48) and then radially in diametrically opposite directions under the body (48).

- 15 This form of the dressing is a more suitable layout for deeper wounds.

20 Referring to Figures 4a and 4b, a more suitable form for shallower wounds is shown.

This comprises a circular backing layer (42) and a circular upwardly dished first membrane (61) with apertures (62) that is permanently attached to the backing layer (42) by heat-sealing to form a circular pouch (63).

- 25 The pouch (63) communicates with the inlet pipe (46) through a hole (64), and thus effectively forms an inlet pipe manifold that delivers the aspirating fluid directly to the wound when the dressing is in use.

30 An annular second membrane (65) with openings (66) is permanently attached to the backing layer (42) by heat-sealing to form an annular chamber (67) with the layer (42).

35 The chamber (67) communicates with the outlet pipe (47) through an orifice (68), and thus effectively forms an outlet pipe manifold that collects the fluid directly from the wound when the dressing is in use.

Referring to Figures 5a and 5b, a variant of the dressing of Figures 4a and 4b that is a more suitable form for deeper wounds is shown.

5 This comprises a circular backing layer (42) and a filler (69), in the form of an inverted frustoconical, solid integer, here a resilient elastomeric foam, formed of a thermoplastic, or preferably a cross-linked plastics foam.

It may be permanently attached to the backing layer (42), with an adhesive film (not shown) or by heat-sealing.

10

A circular upwardly dished sheet (70) lies under and conforms to, but is a separate structure, permanently unattached to, the backing layer (42) and the solid integer (69).

15 A circular upwardly dished first membrane (71) with apertures (72) is permanently attached to the sheet (70) by heat-sealing to form a circular pouch (73) with the sheet (70).

20 The pouch (73) communicates with the inlet pipe (46) through a hole (74), and thus effectively forms an inlet pipe manifold that delivers the aspirating fluid directly to the wound when the dressing is in use.

25 An annular second membrane (75) with openings (76) is permanently attached to the sheet (70) by heat-sealing to form an annular chamber (77) with the sheet (70).

The chamber (77) communicates with the outlet pipe (47) through an orifice (78), and thus effectively forms an outlet pipe manifold that collects the fluid directly from the wound when the dressing is in use.

30

Alternatively, where appropriate the dressing may be provided in a form in which the circular upwardly dished sheet (70) functions as the backing layer and the solid filler (69) sits on the sheet (70) as the backing layer, rather than under it. The filler (69) is held in place with an adhesive film or tape,  
35 instead of the backing layer (42).

Referring to Figures 6a and 6b, a dressing that is a more suitable form for deeper wounds is shown.

5 This comprises a circular backing layer (42) and a filler (79), in the form of an inverted generally hemispherical integer, permanently attached to the backing layer with an adhesive film (not shown) or by heat-sealing.

Here it is a resilient elastomeric foam or a hollow body filled with a fluid, here a gel that urges it to the wound shape.

10 The inlet pipe (46) and outlet pipe (47) are mounted peripherally in the backing layer (42).

15 A circular upwardly dished sheet (80) lies under and conforms to, but is a separate structure, permanently unattached to, the backing layer (42) and the filler (79).

20 A circular upwardly dished bilaminate membrane (81) has a closed channel (82) between its laminar components, with perforations (83) along its length on the outer surface (84) of the dish formed by the membrane (81) and an opening (85) at the outer end of its spiral helix, through which the channel (82) communicates with the inlet pipe (46), and thus effectively forms an inlet pipe manifold that delivers the aspirating fluid directly to the wound when the dressing is in use.

25 The membrane (81) also has apertures (86) between and along the length of the turns of the channel (82).

30 The inner surface (87) of the dish formed by the membrane (81) is permanently attached at its innermost points (88) with an adhesive film (not shown) or by heat-sealing to the sheet (80). This defines a mating closed spirohelical conduit (89).



At the outermost end of its spiral helix, the conduit (89) communicates through an opening (90) with the outlet pipe (47) and is thus effectively an outlet manifold to collect the fluid directly from the wound via the apertures (86).

5

Referring to Figures 7a and 7b, one form of the dressing is provided with a circular backing layer (42).

10 A first (larger) inverted hemispherical membrane (92) is permanently attached centrally to the layer (42) by heat-sealing to form a hemispherical chamber (94) with the layer (42).

15 A second (smaller) concentric hemispherical membrane (93) within the first is permanently attached to the layer (42) by heat-sealing to form a hemispherical pouch (95).

20 The pouch (95) communicates with the inlet pipe (46) and is thus effectively an inlet manifold, from which pipes (97) radiate hemispherically and run to the wound bed to end in apertures (98). The pipes (97) deliver the aspirating fluid directly to the wound bed via the apertures (98).

25 The chamber (94) communicates with the outlet pipe (47) and is thus effectively an outlet manifold from which tubules (99) radiate hemispherically and run to the wound bed to end in openings (100). The tubules (99) collect the fluid directly from the wound via the openings (100).

30 Referring to Figures 8a to 8d, one form of the dressing is provided with a square backing layer (42) and first tube (101) extending from the inlet pipe (46), and second tube (102) extending from the outlet pipe (47) at the points at which they pass through the backing layer, to run over the wound bed. These pipes (101), (102) have a blind bore with orifices (103),  
35 (104) along the pipes (101), (102).

These pipes (101), (102) respectively form an inlet pipe or outlet pipe manifold that delivers the aspirating fluid directly to the wound bed or collects the fluid directly from the wound respectively via the orifices.

5

In Figures 8a and 8d, one layout of each of the pipes (101), (102) as inlet pipe and outlet pipe manifolds is a spiral.

10

In Figure 8b, the layout is a variant of that of Figures 8a and 8b, with the layout of the inlet manifold (101) being a full or partial torus, and the outlet manifold (102) being a radial pipe.

15

Referring to Figure 8c, there is shown another suitable layout in which the inlet manifold (101) and the outlet manifold (102) run alongside each other over the wound bed in a boustrophedonic pattern, i.e. in the manner of ploughed furrows.

20

Referring to Figures 9a to 9d, there are shown other suitable layouts for deeper wounds, which are the same as shown in Figures 8a to 8d. The square backing layer (42) however has a wound filler (110) under, and may be permanently attached to, the backing layer (42), with an adhesive film (not shown) or by heat-sealing, which is an inverted hemispherical solid integer, here a resilient elastomeric foam, formed of a thermoplastic, preferably a cross-linked plastics foam.

25

30

Under the latter is a circular upwardly dished sheet (111) which conforms to, but is a separate structure, permanently unattached to, the solid filler (110). Through the sheet (111) pass the inlet pipe (46) and the outlet pipe (47), to run over the wound bed. These pipes (101), (102) again have a blind bore with orifices (103), (104) along the pipes (101), (102).

35

Alternatively (as in Figures 5a and 5b), where appropriate the dressing may be provided in a form in which the circular upwardly dished sheet (111) functions as the backing layer and the solid filler (110) sits on the sheet (42) as the backing layer, rather than under it. The filler (110) is held in place with an adhesive film or tape, instead of the backing layer (42).

In Figures 10a to 10c, inlet and outlet manifolds for the wound dressings for respectively delivering fluid to, and collecting fluid from, the wound, are formed by slots in and apertures through layers permanently attached to each other in a stack.

Thus, in Figure 10a there is shown an exploded isometric view of an inlet manifold and outlet manifold stack (120) of five square coterminous thermoplastic polymer layers, being first to fifth layers (121) to (125), each attached with an adhesive film (not shown) or by heat-sealing to the adjacent layer in the stack (120).

The topmost (first) layer (121) (which is the most distal in the dressing in use) is a blank square capping layer.

The next (second) layer (122), shown in Figure 10b out of the manifold stack (120), is a square layer, with an inlet manifold slot (126) through it. The slot (126) runs to one edge (127) of the layer (122) for connection to a mating end of a fluid inlet tube ((not shown), and spreads into four adjacent branches (128) in a parallel array with spaces therebetween.

The next (third) layer (123) is another square layer, with inlet manifold apertures (129) through the layer (123) in an array such that the apertures (129) are in register with the inlet manifold slot (126) through the second layer (122) (shown in Figure 10b).

The next (fourth) layer (124), shown in Figure 10c out of the manifold stack (120), is another square layer, with inlet manifold apertures (130) through the layer (124) in an array such that the apertures (130) are in register with the apertures (129) through the third layer (123).

It also has an outlet manifold slot (131) through it.

The slot (131) runs to one edge (132) of the layer (124) on the opposite side of the manifold stack (120) from the edge (127) of the layer (122), for  
5 connection to a mating end of a fluid outlet tube (not shown).

It spreads into three adjacent branches (133) in a parallel array in the spaces between the apertures (130) in the layer (124) and in register with the spaces between the apertures (129) in the layer (122).

10

The final (fifth) layer (125) is another square layer, with inlet manifold apertures (134) through the layer (125) in an array such that the apertures (134) are in register with the inlet manifold apertures (130) through the fourth layer (124) (in turn in register with the apertures (129) through the  
15 third layer (123). It also has outlet manifold apertures (135) in the layer (125) in an array such that the apertures (135) are in register with the outlet manifold slot (131) in the fourth layer (124).

It will be seen that, when the layers (121) to (125) are attached together to form the stack (120), the topmost (first) layer (121), the inlet manifold slot (126) through the second layer (122), and the third layer (123) cooperate to form an inlet manifold in the second layer (122), which is in use is connected to a mating end of a fluid inlet tube (not shown).

25 The inlet manifold slot (126) through the second layer (122), and the inlet manifold apertures (129), (130) and (134) through the layers (123), (124) and (125), all being mutually in register, cooperate to form inlet manifold conduits through the third to fifth layers (123), (124) and (125) between the inlet manifold in the second layer (122) and the proximal face (136) of the  
30 stack (120).

The third layer (121), the outlet manifold slot (131) through the fourth layer (124), and the fifth layer (125) cooperate to form an outlet manifold in the fourth layer (124), which is in use is connected to a mating end of a fluid  
35 outlet tube (not shown).

The outlet manifold slot (131) through the fourth layer (124), and the outlet manifold apertures (135) through the fifth layer (125), being mutually in register, cooperate to form outlet manifold conduits through the fifth layer (125) between the outlet manifold in the fourth layer (124) and the proximal  
5 face (136) of the stack (120).

Referring to Figure 11A, the apparatus (21) is a variant two-pump system with essentially identical, and identically numbered, components as in  
10 Figure 2.

Thus, there is  
a means for supply flow regulation, here a valve (14) in the fluid supply tube (7) from the fluid reservoir (12), and  
15 a first device for moving fluid through the wound (5), here a fixed-speed diaphragm pump (18A), e.g. preferably a small portable diaphragm pump, acting not on the fluid aspiration tube (13), but on an air aspiration tube (113) downstream of and away from an aspirate collection vessel (19) to apply a low negative pressure on the wound through the aspirate collection  
20 vessel (19); with  
a second device for moving fluid through the wound (5), here a fixed-speed peristaltic pump (18B), e.g. preferably a small portable peristaltic pump, applied to the irrigant in the fluid supply tube (7) upstream of and towards the wound dressing,  
25 the first device (18A) and second device (18B), and the valve (14) in the fluid supply tube (7), providing means for providing simultaneous aspiration and irrigation of the wound (5), such that fluid may be supplied to fill the flowpath from the fluid reservoir via the fluid supply tube (via the means for supply flow regulation) and moved by the devices through the flow path.  
30  
There is no means for aspirate flow regulation, e.g. a valve connected to the fluid offtake tube (10).

Since first device (18A) and second device (18B) are fixed-speed, the valve  
35 (14) in the fluid supply tube (7) provides the sole means for varying the irrigant flow rate and the low negative pressure on the wound.

The following extra features are present :

5 The second device, the fixed-speed peristaltic pump (18B), is provided with means for avoiding over-pressure, in the form of a bypass loop with a non-return valve (115). The loop runs from the fluid supply tube (7) downstream of the pump (18B) to a point in the fluid supply tube (7) upstream of the pump (18B).

10 A pressure monitor (116) connected to the fluid offtake tube (10) has a feedback connection to a bleed regulator, here a motorised rotary valve (117) on a bleed tube (118) running to and centrally penetrating the top of the aspirate collection vessel (12A). This provides means for holding the low negative pressure on the wound at a steady level.

15 A filter (119) downstream of the aspirate collection vessel (19) prevents passage of gas- (often air-) borne particulates, including liquids and micro-organisms, from the irrigant and/or exudate that passes into the aspirate collection vessel (19) into the first device (18A), whilst allowing the carrier gas to pass through the air aspiration tube (113) downstream of it to the  
20 first device (18A). The operation of the apparatus is as described hereinbefore

25 Referring to Figure 11B, this shows an alternative layout of the essentially identical, and identically numbered, components in Figure 11A downstream of point A in Figure 11A. The bleed tube (118) runs to the air aspiration tube (113) downstream of the filter (119), rather than into the aspirate collection vessel (19). This provides means for holding the low negative pressure on the wound at a steady level. The operation of the apparatus is  
30 as described hereinbefore

35 Referring to Figure 11C, this shows an alternative layout of the essentially identical, and identically numbered, components in Figure 11A upstream of point B in Figure 11A. The second device (18B) is a variable-speed pump, and the valve (14) in the fluid supply tube (7) is omitted.

The second device (18B) is the sole means for varying the irrigant flow rate and the low negative pressure on the wound. The operation of the apparatus is as described hereinbefore

5 Referring to Figure 11D, this shows an alternative layout of the essentially identical, and identically numbered, components in Figure 11A downstream of point B in Figure 11A.

10 The pressure monitor (116) is connected to a monitor offtake tube (120) and has a feedback connection to the bleed regulator, motorised rotary valve (117) on a bleed tube (118) running to the monitor offtake tube (120). This provides means for holding the low negative pressure on the wound at a steady level. The operation of the apparatus is as described hereinbefore

15

Referring to Figure 12A, this shows another alternative layout of the essentially identical, and identically numbered, components in Figure 11A downstream of point B in Figure 11A.

20

The pressure monitor (116) is connected to a monitor offtake tube (120) and has a feedback connection to a means for aspirate flow regulation, here a motorised valve (16) in the air aspiration tube (113) downstream of the filter (119).

25

This provides means for aspirate flow regulation and for holding the low negative pressure on the wound at a steady level. The operation of the apparatus is as described hereinbefore

30

Referring to Figure 12B, this shows another alternative layout of the essentially identical, and identically numbered, components in Figure 12A downstream of point B in Figure 11A. The pressure monitor (116) is connected to a monitor offtake tube (120) and has a feedback connection to a means for aspirate flow regulation, here a motorised valve (16), in the fluid offtake tube (10) upstream of the aspirate collection vessel (19).

35

This provides means for aspirate flow regulation and for holding the low negative pressure on the wound at a steady level. The operation of the apparatus is as described hereinbefore

5

Referring to Figure 12C, this shows another alternative layout of the essentially identical, and identically numbered, components in Figure 12A downstream of point B in Figure 11A. The pressure monitor (116) is  
10 connected to a monitor offtake tube (120) and has a feedback connection to a variable-speed first device (18A), here a variable-speed pump, downstream of the filter (119), and the valve (16) in the fluid offtake tube (10) is omitted.

15 This provides means for aspirate flow regulation and for holding the low negative pressure on the wound at a steady level. The operation of the apparatus is as described hereinbefore.

20 Referring to Figures 13 to 15, these forms of the dressing are provided with a wound filler (348) under a circular backing layer (342).

This comprises respectively a generally downwardly domed or toroidal, or oblately spheroidal conformable hollow body, defined by a membrane (349)  
25 which is filled with a fluid, here air or nitrogen, that urges it to the wound shape.

The filler (348) is permanently attached to the backing layer via a boss (351), which is e.g. heat-sealed to the backing layer (342).

30

An inflation inlet pipe (350), inlet pipe (346) and outlet pipe (347) are mounted centrally in the boss (351) in the backing layer (342) above the hollow body (348). The inflation inlet pipe (350) communicates with the interior of the hollow body (348), to permit inflation of the body (348).



The inlet pipe (346) extends in a pipe (352) effectively through the hollow body (348). The outlet pipe (347) extends radially immediately under the backing layer (342).

- 5 In Figure 13, the pipe (352) communicates with an inlet manifold (353), formed by a membrane (361) with apertures (362) that is permanently attached to the filler (348) by heat-sealing.

10 It is filled with foam (363) formed of a suitable material, e.g. a resilient thermoplastic. Preferred materials include reticulated filtration polyurethane foams with small apertures or pores.

15 In Figure 14, the outlet pipe (347) communicates with a layer of foam (364) formed of a suitable material, e.g. a resilient thermoplastic. Again, preferred materials include reticulated filtration polyurethane foams with small apertures or pores.

20 In all of Figures 13, 14 and 15, in use, the pipe (346) ends in one or more openings that deliver the irrigant fluid directly from the wound bed over an extended area.

Similarly, the outlet pipe (347) effectively collects the fluid radially from the wound periphery when the dressing is in use.

25 Referring to Figure 16, the dressing is also provided with a wound filler (348) under a circular backing layer (342).

30 This also comprises a generally toroidal conformable hollow body, defined by a membrane (349) which is filled with a fluid, here air or nitrogen, that urges it to the wound shape.

35 The filler (348) may be permanently attached to the backing layer (342) via a first boss (351) and a layer of foam (364) formed of a suitable material, e.g. a resilient thermoplastic. Again, preferred materials include reticulated filtration polyurethane foams with small apertures or pores.

The first boss (351) and foam layer (364) are respectively heat-sealed to the backing layer (342) and the boss (351).

5 An inflation inlet pipe (350), inlet pipe (346) and outlet pipe (347) are mounted centrally in the first boss (351) in the backing layer (342) above the toroidal hollow body (348).

10 The inflation inlet pipe (350), inlet pipe (346) and outlet pipe (347) respectively each extend in a pipe (353), (354) and (355) through a central tunnel (356) in the hollow body (348) to a second boss (357) attached to the toroidal hollow body (348).

The pipe (353) communicates with the interior of the hollow body (348), to permit inflation of the body (348).

15 The pipe (354) extends radially through the second boss (357) to communicate with an inlet manifold (352), formed by a membrane (361).

20 This is permanently attached to the filler (348) by heat-sealing in the form of a reticulated honeycomb with openings (362) that deliver the irrigant fluid directly to the wound bed over an extended area.

The pipe (355) collects the fluid flowing radially from the wound centre when the dressing is in use.

25 This form of the dressing is a more suitable layout for deeper wounds

30 In Figure 17, the dressing is similar to that of Figure 16, except that the toroidal conformable hollow body, defined by a membrane (349), is filled with a fluid, here a solid particulates, such as plastics crumbs or beads, rather than a gas, such as air or an inert gas, such as nitrogen or argon.

The inflation inlet pipe (350) and pipe (353) are omitted from the central tunnel (356).

35

Examples of contents for the body (348) also include gels, such as silicone gels or preferably cellulosic gels, for example hydrophilic cross-linked cellulosic gels, such as Intracare<sup>™</sup> cross-linked materials. Examples also include aerosol foams, and set aerosol foams, e.g. CaviCare<sup>™</sup> foam.

5

Referring to Figures 18 and 19, another form for deeper wounds is shown. This comprises a circular backing layer (342) and a lobed chamber (363) in the form of a deeply indented disc much like a multiple Maltese cross or a stylised rose.

10

This is defined by an upper impervious membrane (361) and a lower porous film (362) with apertures (352) that deliver the irrigant fluid directly from the wound bed over an extended area.

15

A number of configurations of the chamber (363) are shown, all of which are able to conform well to the wound bed by the arms closing in and possibly overlapping in insertion into the wound.

20

In a particular design of the chamber (363), shown lowermost, on of the arms extended and provided with an inlet port at the end of the extended arm. This provides the opportunity for coupling and decoupling the irrigant supply remote from the dressing and the wound in use.

25

An inlet pipe (346) and outlet pipe (347) are mounted centrally in a boss (351) in the backing layer (342) above the chamber (363). The inlet pipe (346) is permanently attached to, and communicate with the interior of, the chamber (363), which thus effectively forms an inlet manifold. The space above the chamber (363) is filled with a loose gauze packing (364).

30

In Figure 18, the outlet pipe (347) collects the fluid from the interior of the dressing from just under the wound-facing face (343) of the backing layer (342).

35

A variant of the dressing of Figure 18 is shown in Figure 19.

The outlet pipe (347) is mounted to open at the lowest point of the space above the chamber (363) into a piece of foam (374).

5 In Figure 20, the dressing is similar to that of Figure 13, except that the inlet pipe (352) communicates with an inlet manifold (353), formed by a membrane (361) with apertures (362), over the upper surface of the generally downwardly domed wound hollow filler (348), rather than through it.

10

In Figure 21, the dressing is similar to that of Figure 14, with the addition of an inlet manifold (353), formed by a membrane (361) with apertures (362), over the lower surface of the generally downwardly domed annular wound hollow filler.

15

In Figure 22, the generally downwardly domed annular wound hollow filler is omitted.

20

Referring to Figure 23, another form for deeper wounds is shown. An inlet pipe (346) and outlet pipe (347) are mounted centrally in a boss (351) in the backing layer (342) above a sealed-off foam filler (348).

25

The inlet pipe (346) is permanently attached to and passes through the filler (348) to the wound bed. The outlet pipe (347) is attached to and communicates with the interior of, a chamber (363) defined by a porous foam attached to the upper periphery of the filler (348). The chamber (363) thus effectively forms an outlet manifold.

30

In Figure 24, the foam filler (348) is only partially sealed-off. The inlet pipe (346) is permanently attached to and passes through the filler (348) to the wound bed. The outlet pipe (347) is attached to and communicates with the interior of the foam of the filler (348).

35

Fluid passes into an annular gap (349) near the upper periphery of the filler (348) into the foam, which thus effectively forms an outlet manifold.

- 5     Figures 25 and 26 show dressings in which the inlet pipe (346) and outlet pipe (347) pass through the backing layer (342).

10     In Figure 25, they communicate with the interior of a porous bag filler (348) defined by a porous film (369) and filled with elastically resilient plastics bead or crumb.

15     In Figure 26, they communicate with the wound space just below a foam filler (348). The foam (348) may CaviCare <sup>TM</sup> foam, injected and formed in situ around the pipes (346) and (347).

20     Referring to Figure 27, another form for deeper wounds is shown. This comprises a circular, or more usually square or rectangular backing layer (342) and a chamber (363) in the form of a deeply indented disc much like a multiple Maltese cross or a stylised rose.

25     This is defined by an upper impervious membrane (361) and a lower porous film (362) with apertures (364) that deliver the irrigant fluid directly to the wound bed over an extended area, and thus effectively forms an inlet manifold. Three configurations of the chamber (363) are shown in Figure 27b, all of which are able to conform well to the wound bed by the arms closing in and possibly overlapping in insertion into the wound.

30     The space above the chamber (363) is filled with a wound filler (348) under the backing layer (342). This comprises an oblately spheroidal conformable hollow body, defined by a membrane (349) that is filled with a fluid, here air or nitrogen, that urges it to the wound shape.

35     A moulded hat-shaped boss (351) is mounted centrally on the upper impervious membrane (361) of the chamber (363).

It has three internal channels, conduits or passages through it (not shown), each with entry and exit apertures. The filler (348) is attached to the membrane (361) of the chamber (363) by adhesive, heat welding or a mechanical fixator, such as a cooperating pin and socket.

5

An inflation inlet pipe (350), inlet pipe (346) and outlet pipe (347) pass under the edge of the proximal face of the backing layer (342) of the dressing.

10 It extend radially immediately under the filler (348) and over the membrane (361) of the chamber (363) to each mate with an entry aperture in the boss (351).

15 An exit to the internal channel, conduit or passage through it that receives the inflation inlet pipe (350) communicates with the interior of the hollow filler (348), to permit inflation.

20 An exit to the internal channel, conduit or passage that receives the inlet pipe (346) communicates with the interior of the chamber (363) to deliver the irrigant fluid via the chamber (363) to the wound bed over an extended area.

25 Similarly, an exit to the internal channel, conduit or passage that receives the outlet pipe (347) communicates with the space above the chamber (363) and under the wound filler (348), and collects flow of irrigant and/or wound exudate radially from the wound periphery.

30 Referring to Figure 28A, this shows another alternative layout of the essentially identical, and identically numbered, components in Figure 12C downstream of point B in Figure 12A, and alternative means for handling the aspirate flow to the aspirate collection vessel under negative or positive pressure to the wound.

35

The pressure monitor (116) is connected to a monitor offtake tube (120) and has a feedback connection to a variable-speed first device (18A), here a variable-speed pump, upstream of the aspirate collection vessel (19), and the filter (119) and the air aspiration tube (113) are omitted. This provides means for aspirate flow regulation and for holding the low negative pressure on the wound at a steady level. The operation of the apparatus is as described hereinbefore.

Referring to Figure 28B, this shows another alternative layout of the essentially identical, and identically numbered, components in Figure 12C downstream of point B in Figure 11A, and alternative means for handling the aspirate flow to the aspirate collection vessel under negative or positive pressure to the wound. The pressure monitor (116) is omitted, as is the feedback connection to a variable-speed first device (18A), here a variable-speed pump, downstream of the aspirate collection vessel (19) and the filter (119). A third device (18C), here a fixed-speed pump, provides means for moving fluid from the aspirate collection vessel (19) into a waste bag (19A). The operation of the apparatus is as described hereinbefore.

Referring to Figure 29, this shows an alternative layout of the essentially identical, and identically numbered, components in Figure 11A upstream of point A in Figure 11A.

It is a single-pump system essentially with the omission from the apparatus of Figure 11A of the second device for moving irrigant fluid into the wound dressing. The operation of the apparatus is as described hereinbefore.

The use of the apparatus of the present invention will now be described by way of example only in the following Example:

Example 1 - Removal of adherent bacteria and debris with a two-pump apparatus.

5 In this example, a culture medium sheet containing nutritional supplements with an adherent bacterial culture of *Staphylococcus aureus* on its top surface is laid in a cavity wound model to represent adherent bacteria and debris on a wound bed to be removed by the two-pump apparatus.

10 The dressing is essentially identical with that in Figure 18, i.e. it comprises a circular backing layer and a lobed chamber in the form of a deeply indented disc much like a multiple Maltese cross or a stylised rose, defined by an upper impervious membrane and a lower porous film with apertures that deliver the irrigant fluid directly from the wound bed over an extended area.

15 The irrigant supplied to the wound dressing under a negative pressure on the wound bed contains a therapeutically active amount of an antibacterial agent, selected from chlorhexidine, povidone iodine, triclosan, metronidazole, cetrimide and chlorhexidine acetate.

20 A two-pump system is set up essentially as in Figure 2, with an irrigant dispensing bottle – 1000ml Schott Duran, connected to a peristaltic pump (Masterflex) for irrigant delivery, and associated power supply and supply tube,  
25 a diaphragm vacuum pump (Schwarz) for aspiration, and associated power supply and offtake tube, connected to a vacuum vessel (aspirant collection jar) – Nalgene 150ml polystyrene each pump being connected to a dressing consisting of the following elements:

- 30 1. wound-contacting element, comprising a lobed bag with low porosity 'leaky' membrane wound contact layer on the lower surface, impermeable film on the top, and a foam spacer between the two layers to allow free flow of irrigant solution.
- 35 2. a space filling element, comprising a reticulated, open-cell foam (black reticulated foam, Foam Techniques) 30mm thick, 60mm diameter



3. an occlusive adhesive coated polyurethane backing layer top film (Smith & Nephew Medical) with acrylic pressure sensitive adhesive
4. two tubes passing under the occlusive top film, and sealed to prevent leakage of gas or liquid:
  - 5 a. one tube centrally penetrating the top film of the wound-contacting element to deliver irrigant into the chamber formed by this film and the porous element;
  - b. the other tube of approximately equal length to remove aspirant with the opening positioned just above the top film of the wound
  - 10 contacting element.

Preparation of agar culture medium sheet with adherent Staphylococcus aureus culture.

15 An aqueous solution of agar culture medium is prepared by weighing agar culture medium containing nutritional supplements into a glass jar and making it up to the required weight with deionised water. The jar is placed in an oven (Heraeus), at a set temperature. After 60 minutes the jar is removed from the oven and shaken, to encourage mixing.

20 Petri dishes are partially filled with 10g quantities of the culture medium and placed in a fridge (LEC, set temperature: 4°C) to set for at least 1 hour.

Final thickness of the culture medium sheet is ~5mm. Petri dishes containing the culture medium sheet are removed from the fridge at least 2  
25 hours before use. The culture medium sheet in the Petri dishes is then inoculated with Staphylococcus aureus.

Each is then placed in an incubator at a set temperature.

30 After the culture has covered more than 50% of the agar surface the dishes are removed from the incubator.

They are place in a fridge, and removed from the fridge at least 2 hours before use.

### Preparation of test equipment and materials

Irrigant solution (deionised water containing a therapeutically effective amount of an antibacterial agent, selected from chlorhexidine, povidone iodine, triclosan, metronidazole, cetrимide and chlorhexidine acetate) and the Perspex wound model are pre-conditioned in an oven (Gallenkamp) at set temperature 37°C, for at least 4 hours before use.

For each test, a freshly prepared culture medium sheet with adherent *Staphylococcus aureus* culture is removed from a Petri dish and weighed. The Perspex wound model is then removed from the oven and the culture medium sheet with adherent *Staphylococcus aureus* culture placed at the bottom of the cavity. Application of the dressing to the wound model is as follows:

- the wound contacting element is carefully placed over the culture medium sheet with adherent *Staphylococcus aureus* culture
- the foam filler is placed on top of this with the irrigant and aspirant tubes running centrally to the top of the cavity (the foam filler is slit to the centre to facilitate this).
- the side entry port, pre-threaded onto the tubes, is adhesively bonded to the upper surface of the wound model block using an acrylic pressure sensitive adhesive
- the top adhesive coated film is applied over all of the elements and pressed down to give a seal on all sides, and especially around the tube entry/exit point

Application of the dressing to the wound model is the same for all tests performed. All tubing used is the same for each experiment (e.g. material, diameter, length).

### Simultaneous Irrigation & Aspiration

For the experiment most of the apparatus (not including the pumps, power supply, and connecting tubing to and from the pumps) is placed in an oven (Gallenkamp, set temperature: 37°C), on the same shelf.

Before starting the irrigation pump a vacuum is drawn on the system to check that the dressing and tube connections are substantially airtight.

The pumping system is controlled to give a pressure at the vacuum vessel of approximately -75mmHg before opening the system up to include the dressing). Once system integrity has been confirmed, the irrigation pump is started (nominal flow rate: 50ml/hr), i.e. both pumps running together. Timing of the experiment is started when the advancing water front within the irrigant tube is observed to have reached the top of the dressing.

After 60 minutes, the irrigation pump is stopped, shortly followed by the vacuum (aspiration) pump. Aspirant liquid collected in the vacuum jar is decanted into a glass jar. The vacuum jar is rinsed with ~100ml of deionised water and this added to the same glass jar. The aspirant solution is then assayed for the Staphylococcus aureus quantity present.

#### Sequential Irrigation & Aspiration

The experimental set up is as for the simultaneous irrigation/aspiration experiment. Before starting the experiment a vacuum is pulled on the system to check that the dressing and tube connections are substantially airtight. The pumping system is controlled to give a pressure at the vacuum vessel of approximately -75mmHg before opening the system up to include the dressing. Once system integrity has been confirmed, the irrigation pump is started (nominal rate: 186ml/hr) and run until the advancing water front in the irrigant tube is observed to have reached the top of the dressing.

The pump is temporarily stopped at this point whilst the vacuum line is sealed (using a tube clamp) and the vacuum pump stopped.

Timing of the experiment is from the point the irrigation pump is restarted. The pump is run until 50ml of irrigant has entered the wound model (just over 16 minutes at the rate of 186ml/hr). At this point the irrigant pump is stopped.

It is observed that during the filling phase of sequential filling and flushing, air trapped in the model wound cavity caused the top film of the dressing to inflate substantially, to a point approaching failure.

After a further ~44 minutes (60 minutes from the start of the experiment) the vacuum pump is started and the tube clamp on the aspirant line removed. The wound model is aspirated for 5 minutes. Towards the end of this period a small leak is introduced into the top film of the dressing to  
5 maximise the amount of fluid drawn from the wound model (it is observed that as the pressure differential between the wound model cavity and the vacuum jar reduced to zero, the flow of aspirant also tended to slow. Introducing a small leak re-established the pressure differential and the flow  
10 of aspirant out of the cavity).

Aspirant liquid collected in the vacuum jar is decanted into a glass jar. The vacuum jar is rinsed with ~100ml of deionised water and this added to the same glass jar. The aspirant solution is then assayed for the  
15 Staphylococcus aureus quantity present.

### Conclusions

Simultaneously irrigating and aspirating the wound model removes or kills more of the adherent Staphylococcus aureus on the culture medium sheet placed at the base of the wound model cavity than sequentially filling and  
20 emptying the cavity, even though the amount of liquid entering the wound and the duration of the experiment are the same in both cases. Simultaneously irrigating and aspirating also removes more fluid from the model wound.

25 Example 2. The combination of simultaneous fluid flow (irrigation) with aspiration (under reduced pressure) and actives (PDGF-bb) on wound bed fibroblasts compared with the exposure of wound bed fibroblasts to repeated fill-empty cycles of fluid flow and aspiration.

30 An apparatus of the present invention was constructed essentially as in Figure 30 which is an apparatus where an irrigant or fluid of some nature is delivered continually to the wound bed and the resultant wound exudate/fluid mixture is at the same time continually aspirated from the  
35 wound.

Alternative systems are known where the wound is subjected to repeated iteration of a cycle of fluid delivery followed by a period of aspiration under reduced pressure.

- 5 The apparatus comprised a surrogate wound chamber (Minucells perfusion chamber) in which normal diploid human fibroblasts were cultured on 13 mm diameter (Thermanox polymer) cover slips retained in a two part support (Minnucells Minusheets). Tissues present in the healing wound that must survive and proliferate were represented by the cells within the
- 10 chamber. Nutrient medium (DMEM with 10% FCS with 1% Buffer All) to simulate an irrigant fluid/wound exudate mixture, was pumped from a reservoir into the lower aspect of the chamber where it bathed the fibroblasts and was removed from the upper aspect of the chamber and returned to a second reservoir. The wound chamber was maintained at
- 15 less than atmospheric pressure by means of a Vacuum pump in line with the circuit.

- The pumps for the circuit were peristaltic pumps acting on silicone (or equivalent) elastic tubing. The circuit was exposed to a vacuum of no more
- 20 than 10% atmospheric pressure, 950 mbar and atmospheric pressure varied up to a maximum value of 1044 mbar.. The internal diameter of the tubing was 1.0 mm. A total volume for the circuit including the chamber and the reservoir of between 100 and 220 ml was used. The flow rates used were at a number of values between  $0.1 \text{ ml min}^{-1}$  and  $2.0 \text{ ml}^{-1} \text{ min}^{-1}$ .

- 25 An experiment was conducted that simulated conditions that are not uncommon for healing wounds whereby a fluid was delivered to the wound bed and the application of a vacuum is used to remove the mixture of fluid and exudate to a waste reservoir. An air bleed fluid control valve was
- 30 additionally positioned in the circuit so that on opening the air bleed occurred for a time and closed the fluid flow, the simulated irrigant fluid/wound exudate mixture was evacuated from the chamber and the chamber left empty and the fibroblasts were maintained under a negative pressure relative to the atmosphere. This represents an empty / fill system,
- 35 6 cycles of empty/ fill were performed with each fill or empty phase lasting 1 hour.

An experiment was conducted using the following 2 scenarios:

Apparatus was constructed essentially as in Figure 30 but where

- a) continuous flow simultaneous aspirate irrigate system with
- 5 b) material beneficial to wound healing (PDGF- bb) was present in the nutrient flow bathing the cells.

Apparatus was also constructed essentially as in Figure 30 but

- a) it was operated as an empty/fill system with 6 x cycles of 1 hour empty/  
10 1 hour fill over a total of 25 hours with
- b) the material beneficial to wound healing (PDGF- bb) was present, in the nutrient flow bathing the cells.

### Results and Conclusions

15

The following results were obtained for a circuit comprising a wound chamber as above containing a total volume of nutrient media (104 ml) pumped at a flow rate of  $0.2 \text{ ml min}^{-1}$ , and where vacuum was set at 950 mbar and where atmospheric pressure was varied up to a maximum value  
20 of 1044 mbar. The wound chamber and media were held at  $37^{\circ}\text{C}$  for 25 hours. In one set of wound chambers continuous flow was maintained. In a second set of chambers 6 cycles of empty/fill were performed with each fill or empty phase lasting 1 hour.

25 In controls

- a) operated as empty/fill with 6 cycles of 1 hour empty/1 hour fill, and
  - b) where PDGF-bb is present
- the survival and growth of fibroblasts is inhibited compared to the continuous flow systems.

30

Where flow circuits consists of

- a) continuous flow (SIA) and
  - b) PDGF-bb is present
- the survival and growth of fibroblasts is enhanced to a greater level than  
35 empty/fill plus PDGF-bb

Conditions	Mean of cell activity* after 25 hours.
Continuous flow (SIA) plus active (PDGF-bb)	0.34
Fill empty 6 cycles plus active (PDGF-bb)	0.22

\*Cell activity measured with a WST (Tetrazolium based mitochondrial dehydrogenase activity assay).

- 5 The combination of actives (PDGF-bb) and continuous fluid flow at  $0.2 \text{ ml min}^{-1}$  with waste fluid removal under a vacuum of no more than 10% atmospheric pressure, enhances the cell response necessary for wound healing more than the fill empty system (+ PDGF-bb).

**Claims:**

1. An apparatus for aspirating, irrigating and/or cleansing wounds, comprising
  - 5 a) a fluid flow path, comprising a conformable wound dressing, having a backing layer which is capable of forming a relatively fluid-tight seal or closure over a wound and at least one inlet pipe for connection to a fluid supply tube, which passes through and/or under the wound-facing face, and
    - 10 and at least one outlet pipe for connection to a fluid offtake tube, which passes through and/or under the wound-facing face, the point at which the or each inlet pipe and the or each outlet pipe passes through and/or under the wound-facing face forming a relatively fluid-tight seal or closure over the wound;
  - 15 b) a fluid reservoir connected by a fluid supply tube to an inlet pipe via optional means for supply flow regulation;
  - c) at least one device for moving fluid through the wound dressing; and
  - d) optionally means for bleeding the flowpath, characterised in that it comprises
    - 20 e) means for supplying physiologically active agents to the wound; and
    - f) means for providing simultaneous aspiration and irrigation of the wound,such that fluid may be supplied to fill the flowpath from the fluid reservoir via the fluid supply tube (optionally via means for supply flow regulation) while fluid is aspirated by a device through the fluid offtake tube (optionally or as necessary via means for aspirate flow regulation).
2. An apparatus according to claim 1, characterised in that the means for supplying physiologically active agents to the wound comprises the fluid
  - 30 reservoir containing physiologically active components in therapeutically active amounts to promote wound healing.
3. An apparatus according to claim 1, characterised in that the physiologically active agents for supply to the wound are
  - 35 autologous, allogeneic and xenogeneic blood or blood products, platelet lysates, plasma or serum;
  - natural purified protein or recombinant-produced protein growth factors;
  - or



natural purified protein or recombinant produced protein cytokines;  
materials to achieve the delivery of nucleic acid molecules as active  
genes or gene-containing vectors, as naked molecules, molecules  
complexed with nucleic acid binding carriers, molecules within  
5 liposomes or as virus vectors;  
or combinations thereof.

4. An apparatus according to claim 1, characterised in that the  
physiologically active agents for supply to the wound are materials that  
10 are beneficial in promoting wound healing by removing materials or by  
regulating, limiting or inhibiting processes deleterious to wound healing  
from wound exudate which are  
natural purified protein or recombinant-produced protein proteinase  
inhibitors;  
15 inhibitors of inhibitors of angiogenesis;  
antioxidants;  
free radical scavengers or degraders;  
free radical generators;  
or combinations thereof.

5. An apparatus according to claim 1, characterised in that the  
physiologically active agents for supply to the wound are natural  
purified protein or recombinant-produced protein debriding agents.

6. An apparatus according to claim 1, characterised in that the  
physiologically active agents for supply to the wound are nutrients for  
wound cells, antimicrobials, antifungal agents, antibiotics, antibacterial  
agents, local analgesics/anaesthetics, or combinations thereof.

7. An apparatus according to claim 1, characterised in that the means for  
providing simultaneous aspiration and irrigation of the wound often  
comprises  
a first device for moving fluid through the wound applied to fluid  
downstream of and away from the wound dressing, in combination with  
35 at least one of

a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing;

means for aspirate flow regulation, connected to a fluid offtake tube, and

means for supply flow regulation, connected to a fluid supply tube;

8. An apparatus according to claim 1, characterised in that the aspirate in the fluid offtake tube downstream of the wound dressing is aspirated into a collection vessel, and the first device acts on fluid from the collection vessel.

9. An apparatus according to claim 7, characterised in that the first device and/or second device is a fixed throughput device, and the means for providing simultaneous aspiration and irrigation of the wound also comprises at least one of

means for supply flow regulation, connected to a fluid supply tube, and means for aspirate flow regulation, connected to a fluid offtake tube.


10. An apparatus according to claim 7, characterised in that the first device and/or second device is a variable-throughput device, and the means for providing simultaneous aspiration and irrigation of the wound does not comprise other means for aspirate flow regulation, connected to a fluid offtake tube and/or other means for supply flow regulation, connected to a fluid supply tube.


11. An apparatus according to claim 1, characterised in that the means for providing simultaneous aspiration and irrigation of the wound comprises means for providing simultaneous aspiration and irrigation of the wound comprises

a first device for moving fluid through the wound applied to fluid downstream of and away from the wound dressing, and


a second device for moving fluid through the wound applied to the irrigant in the fluid supply tube upstream of and towards the wound dressing.

12. An apparatus according to claim 11, characterised in that the first device and/or second device is a fixed throughput device, and the means for providing simultaneous aspiration and irrigation of the wound also comprises at least one of
- 5 means for supply flow regulation, connected to a fluid supply tube, and means for aspirate flow regulation, connected to a fluid offtake tube.
13. An apparatus according to claim 11, characterised in that the first device and/or second device is a variable-throughput device, and the
- 10 means for providing simultaneous aspiration and irrigation of the wound does not comprise other means for aspirate flow regulation, connected to a fluid offtake tube and/or other means for supply flow regulation, connected to a fluid supply tube.
- 15 14. A method of treating wounds to promote wound healing using the apparatus according to claim 1.

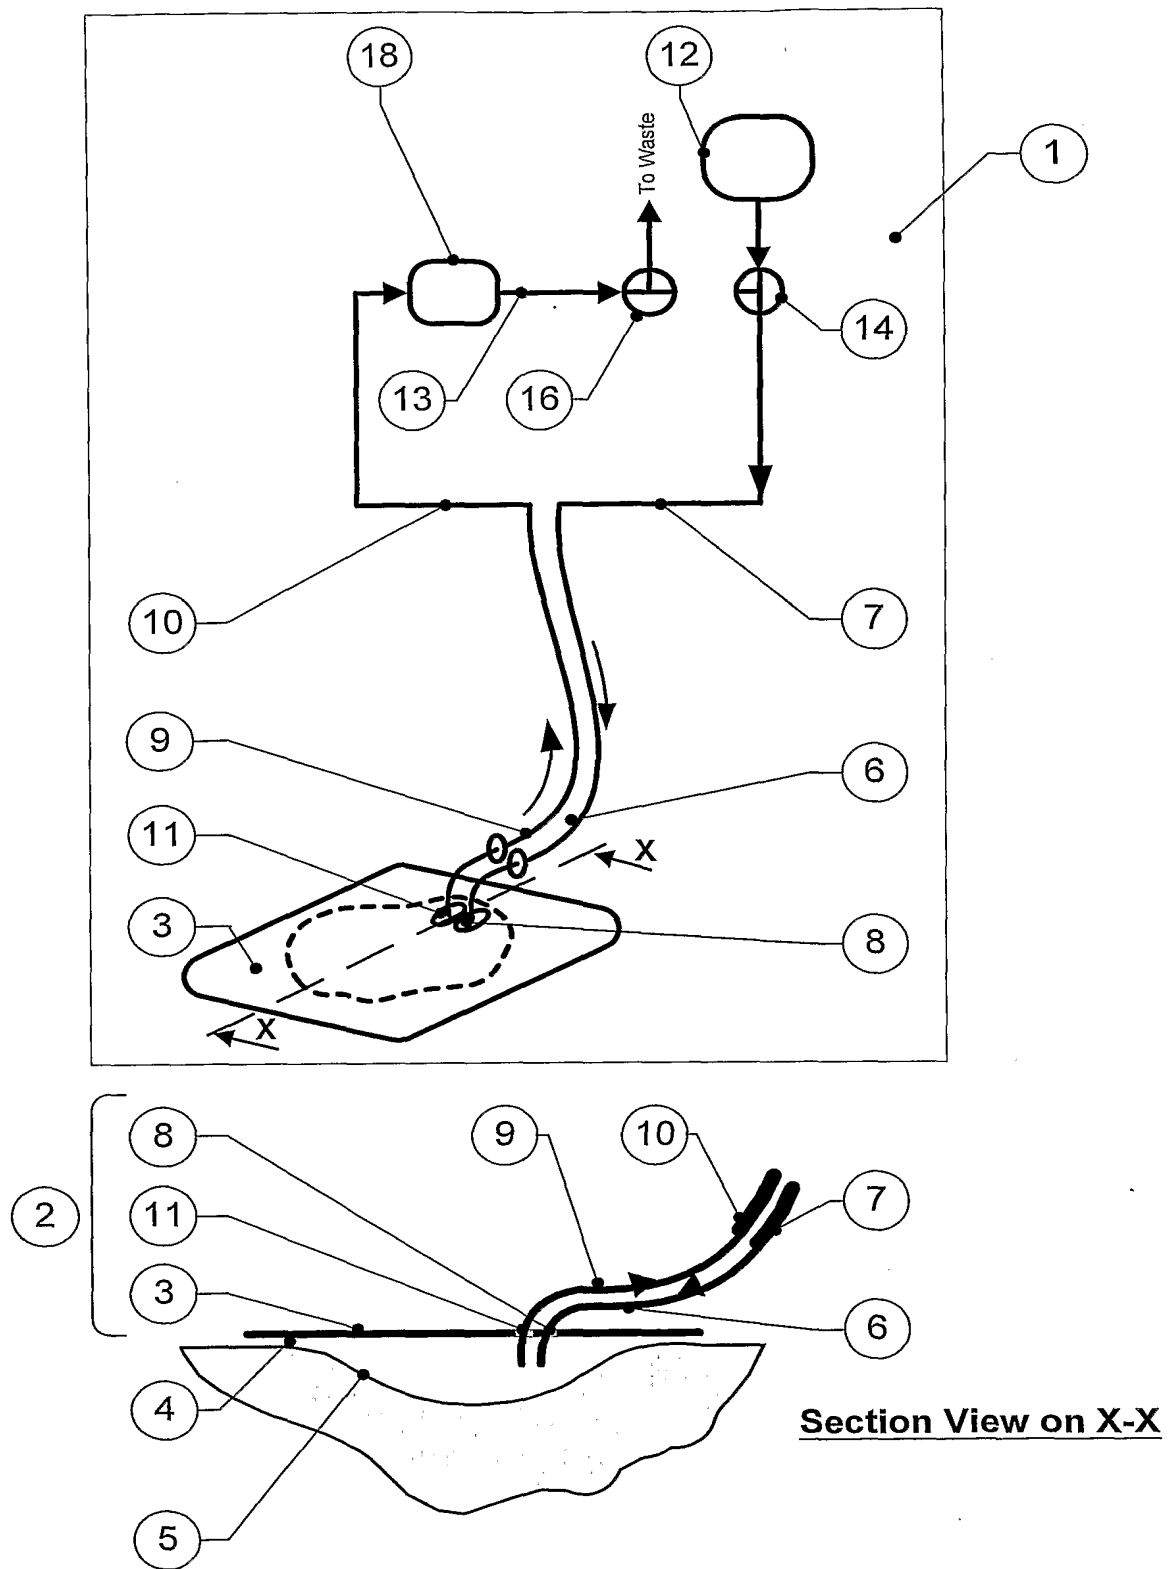

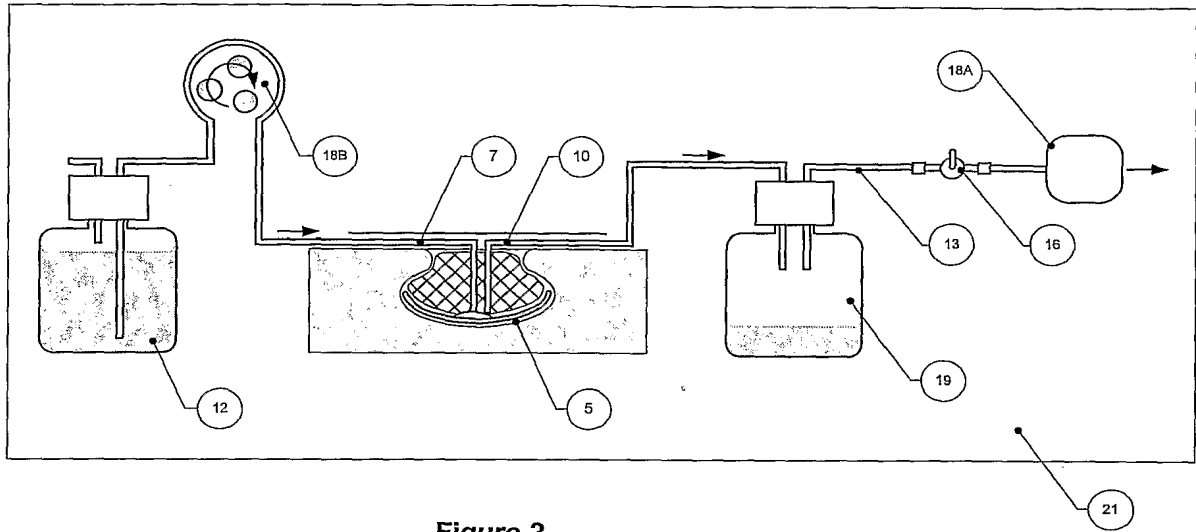

**Figure 2**

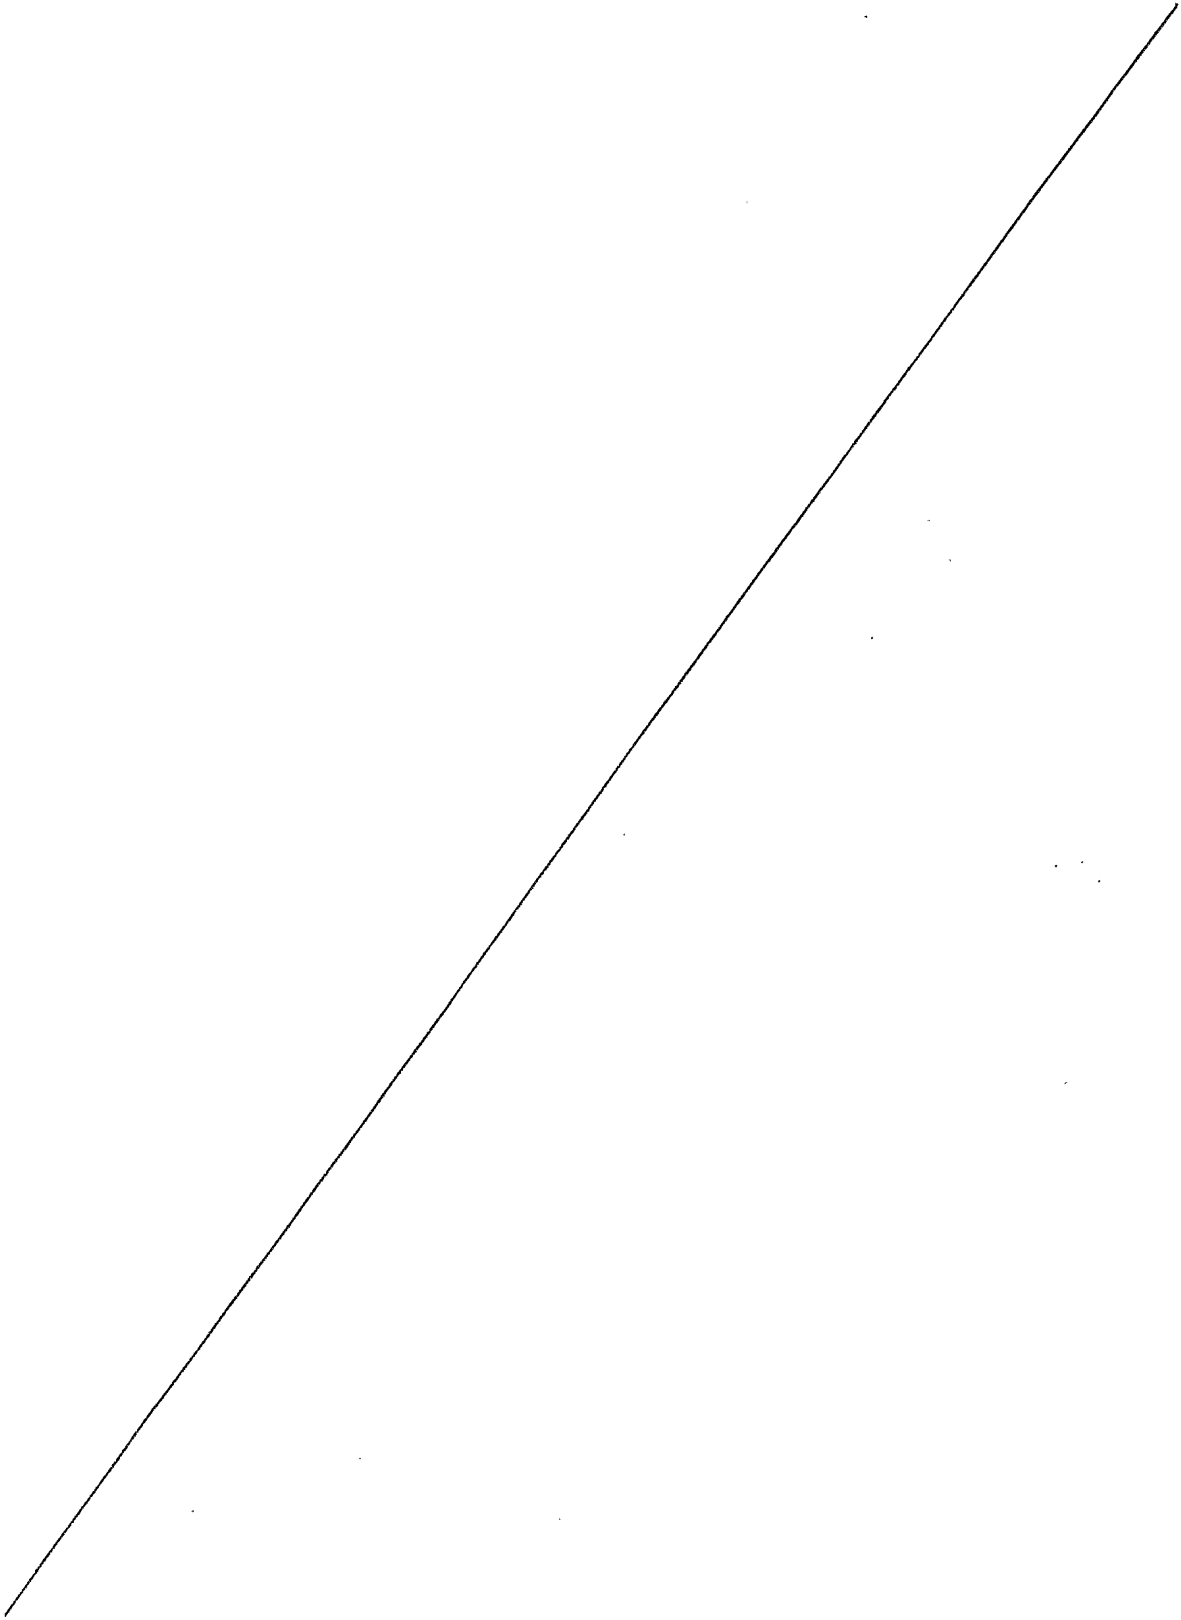

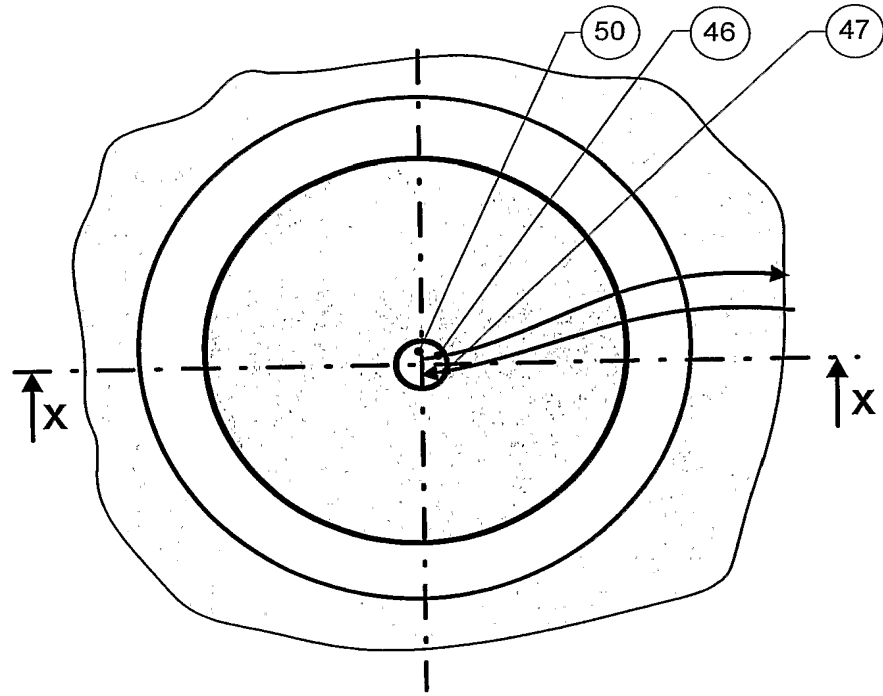


Figure 3a

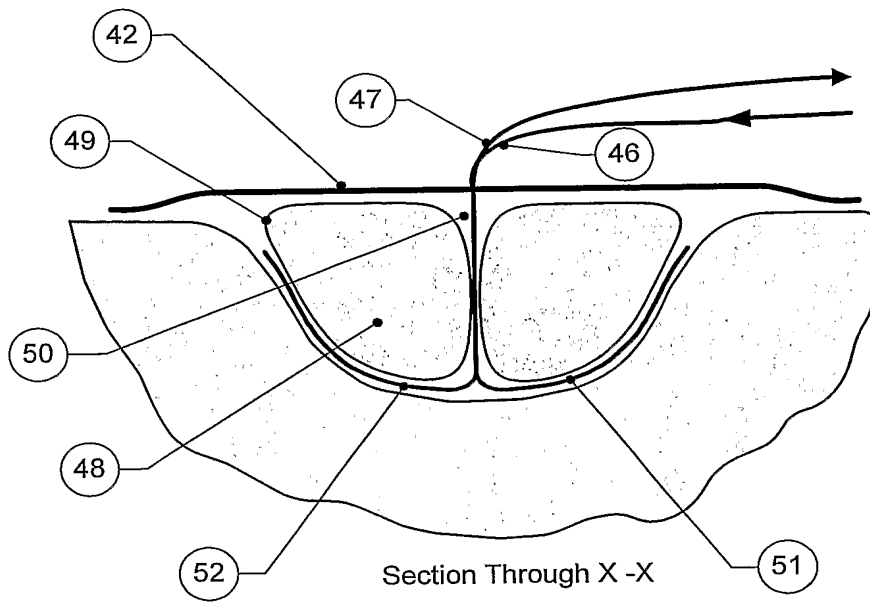


Figure 3b

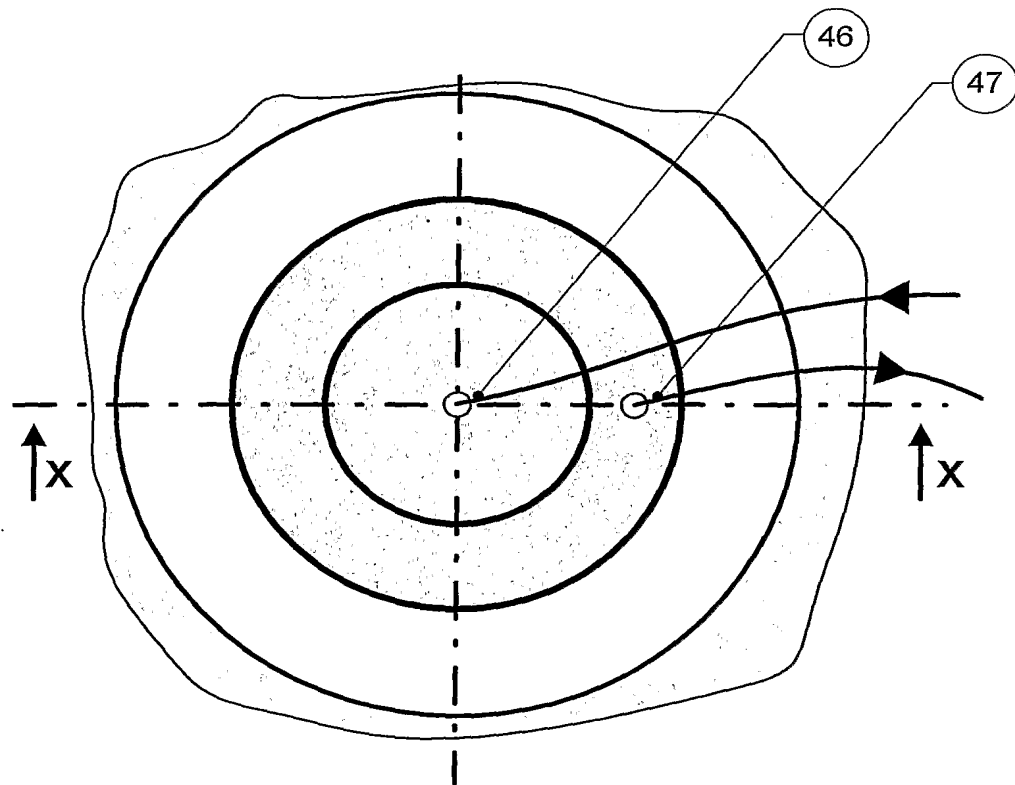


Figure 4a

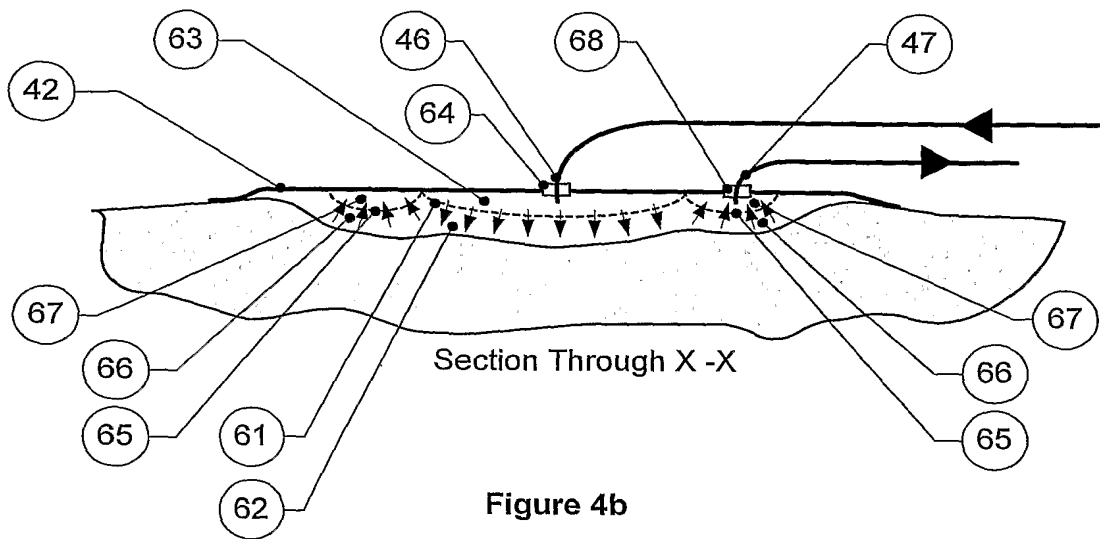


Figure 4b




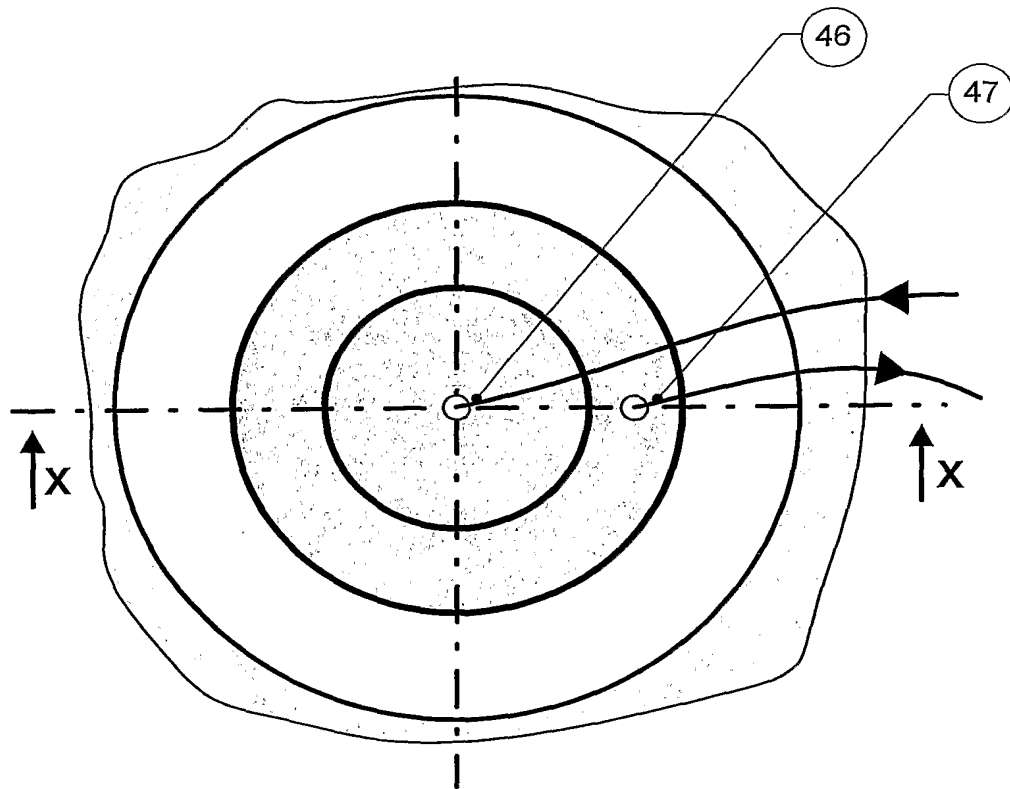


Figure 5a

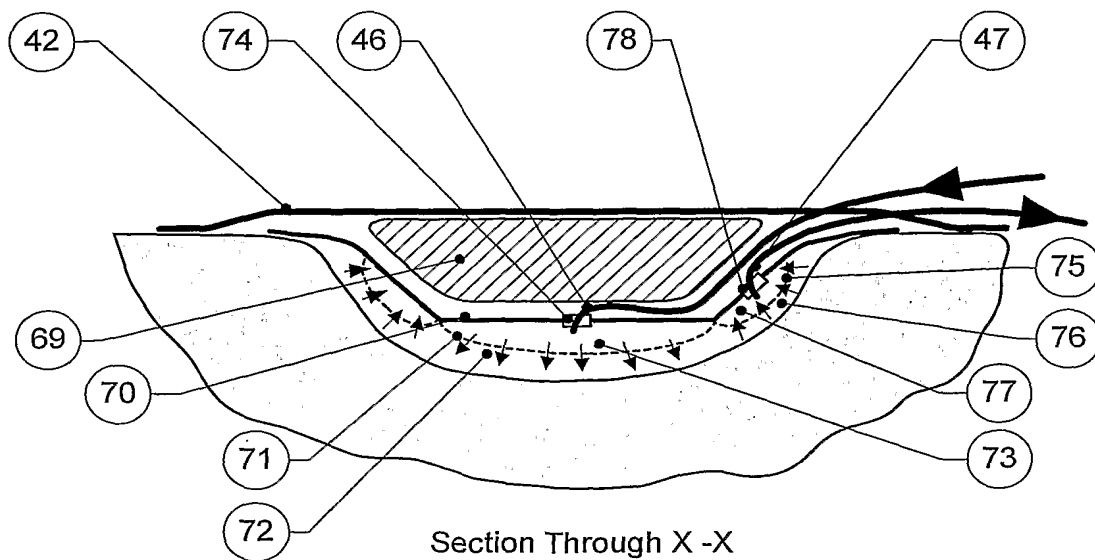

Section Through X -X

Figure 5b

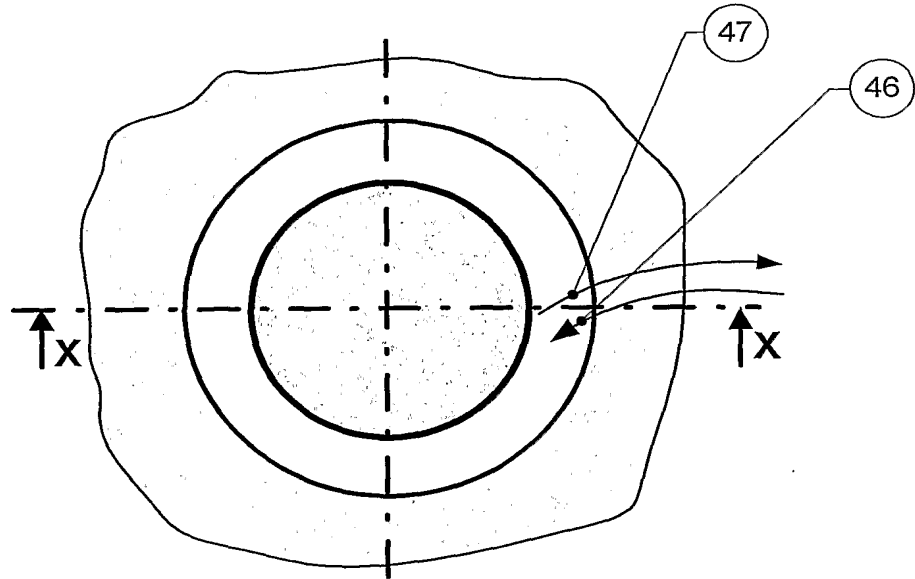


Figure 6a

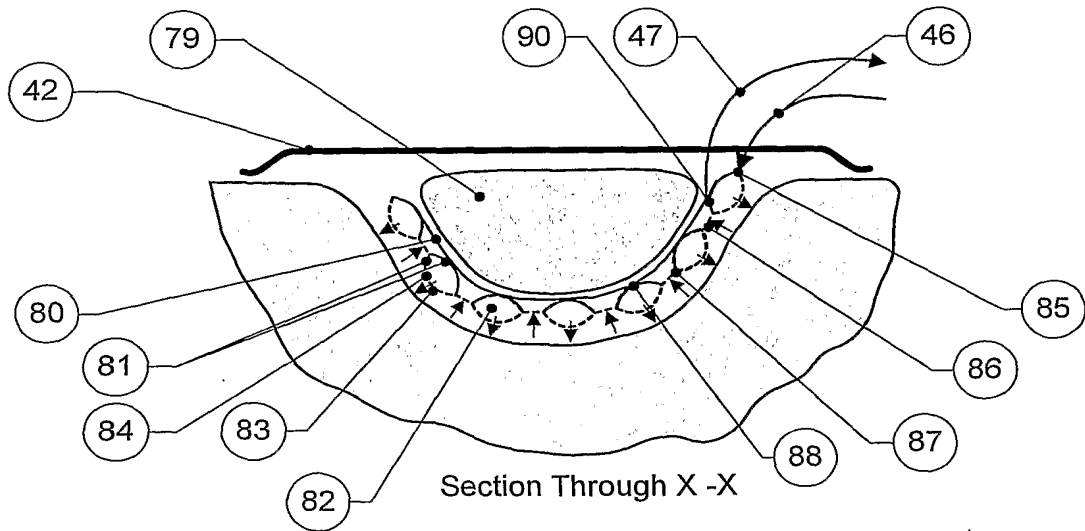


Figure 6b


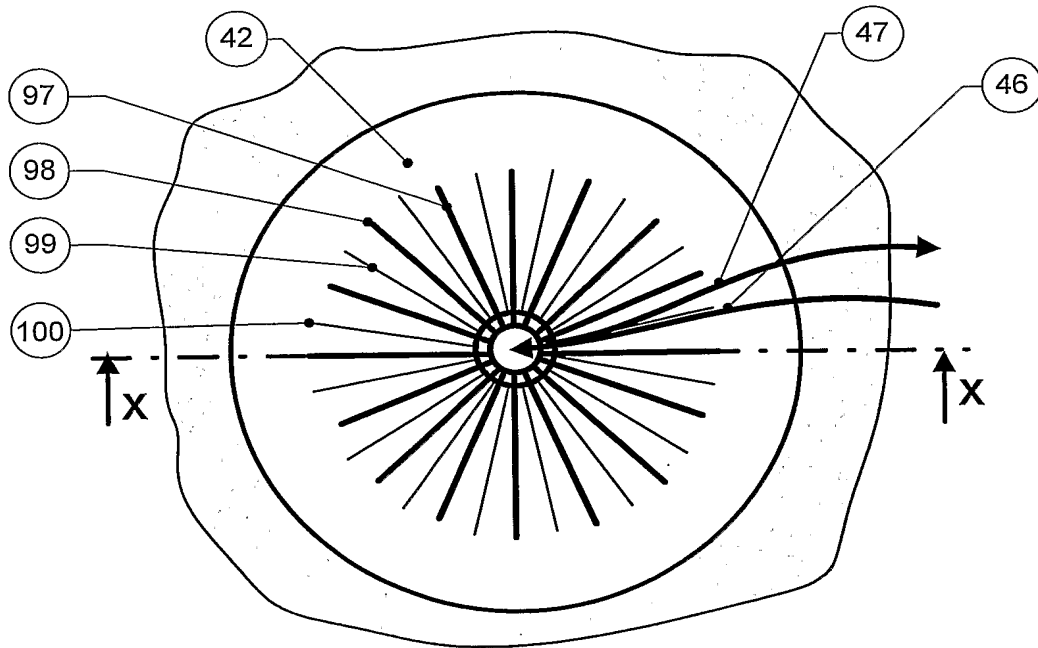


Figure 7a

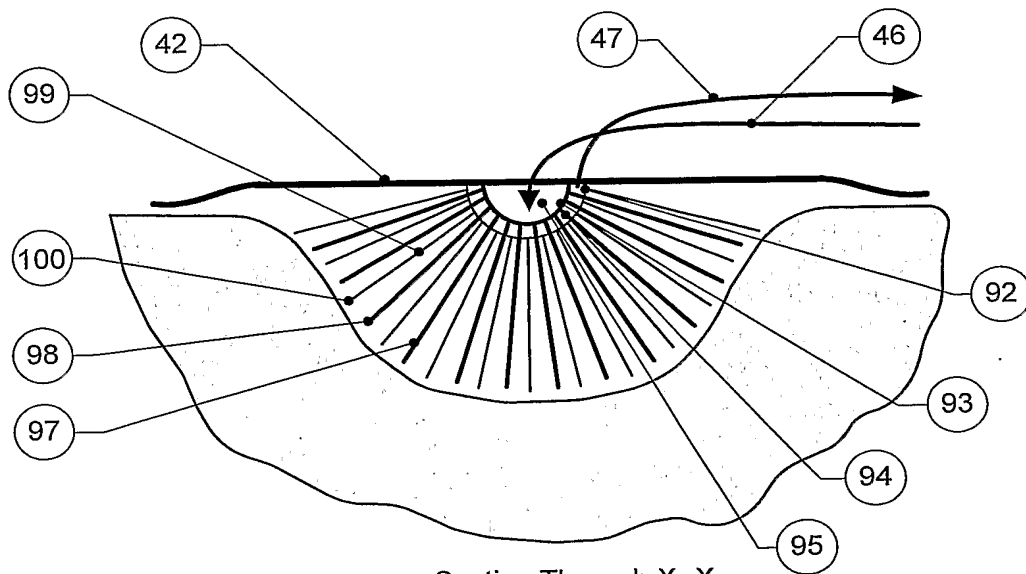

Section Through X -X

Figure 7b

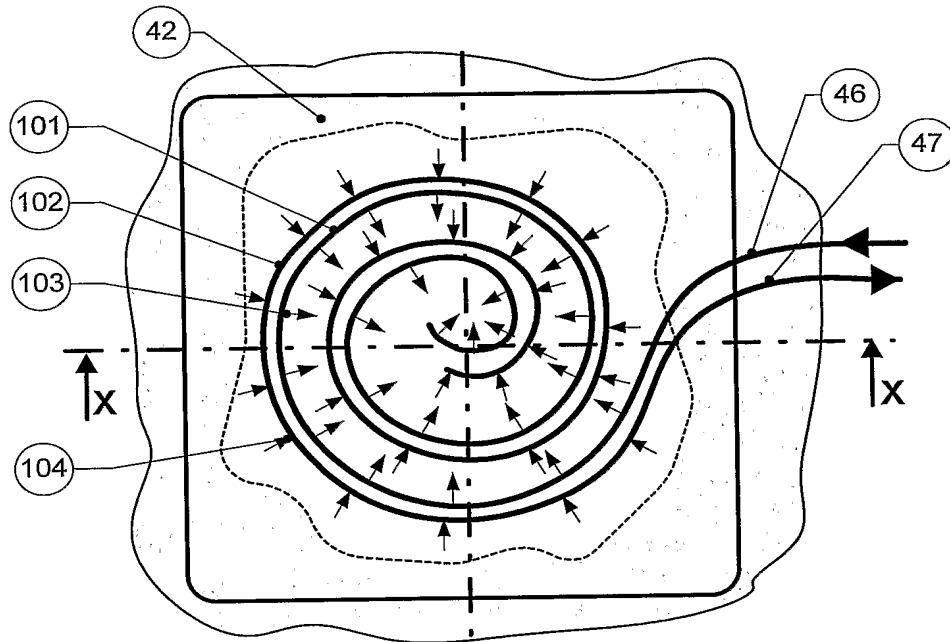


Figure 8a

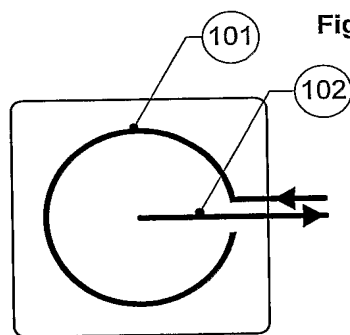


Figure 8b







Figure 8c

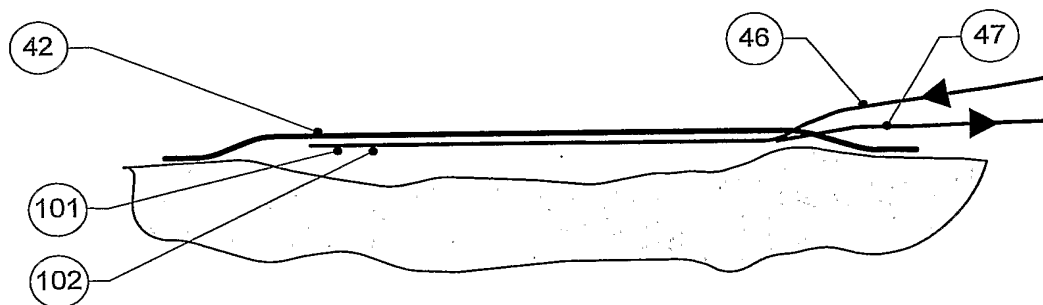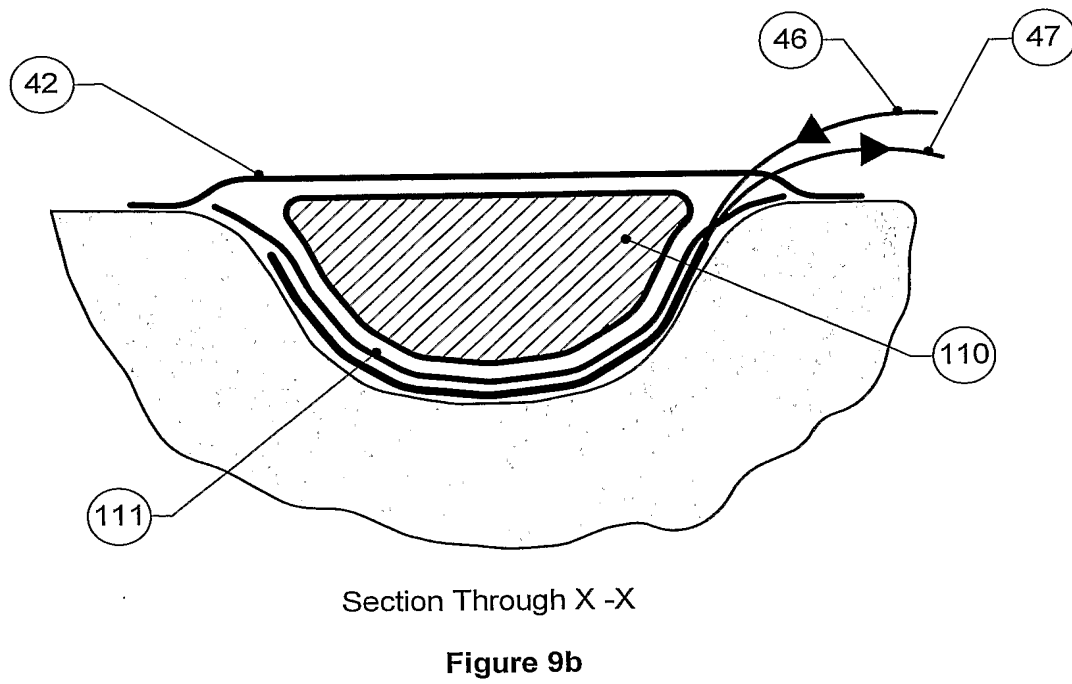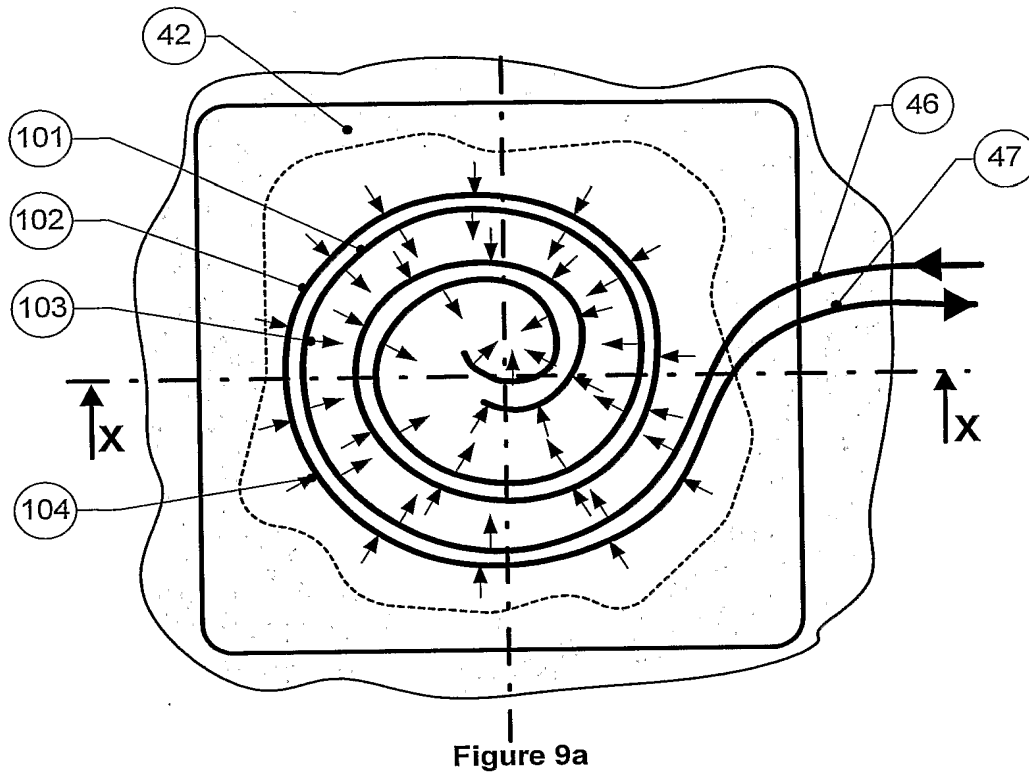

Section Through X -X

Figure 8d







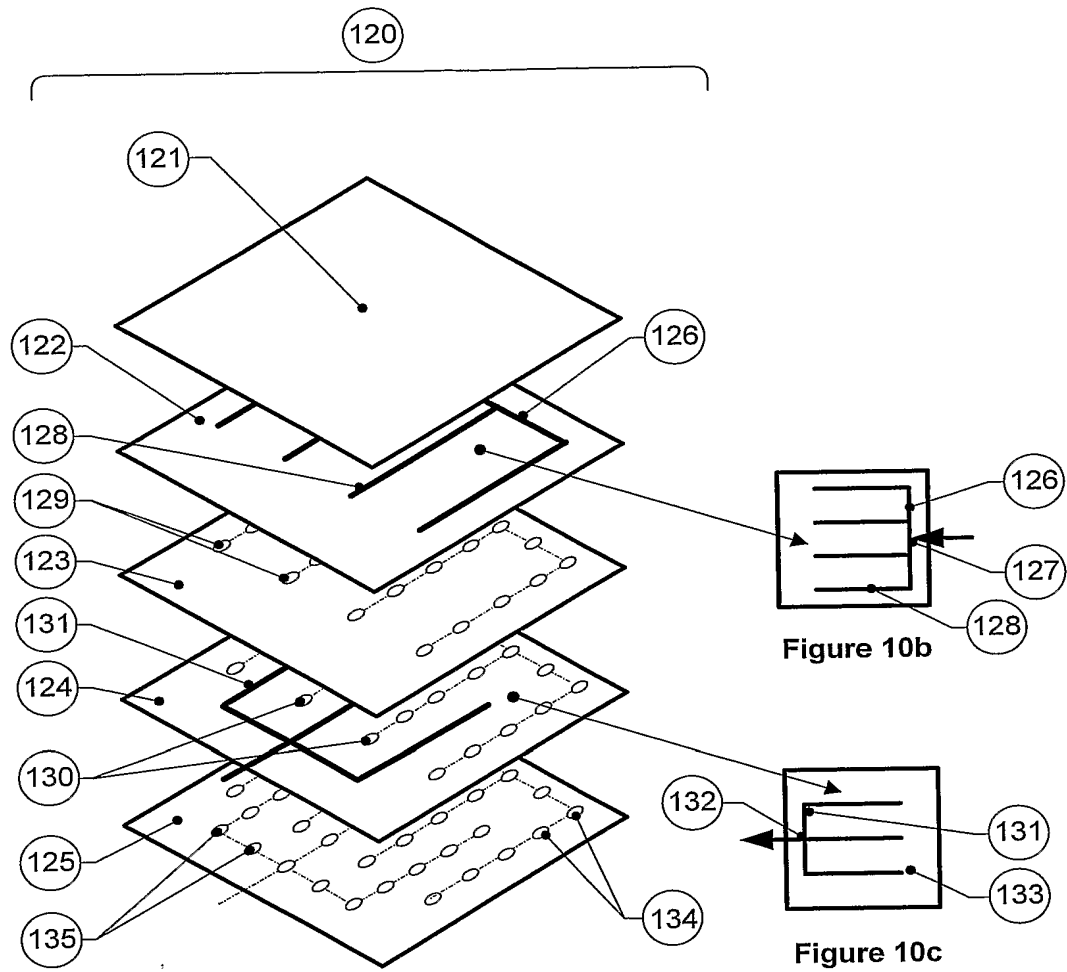


Figure 10a

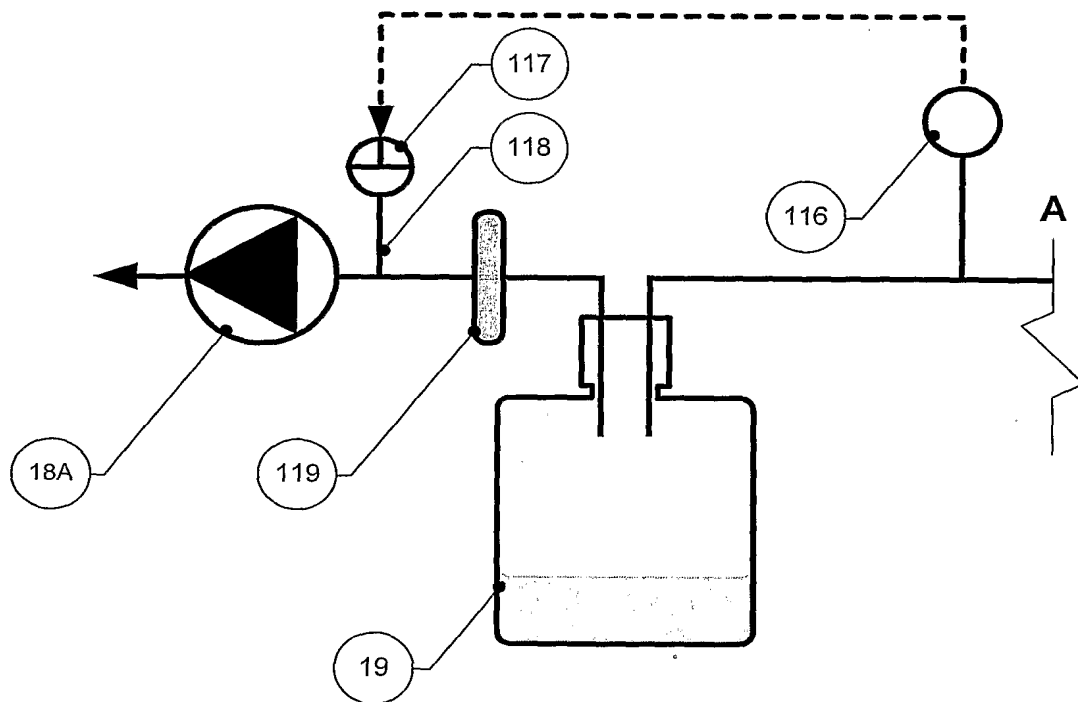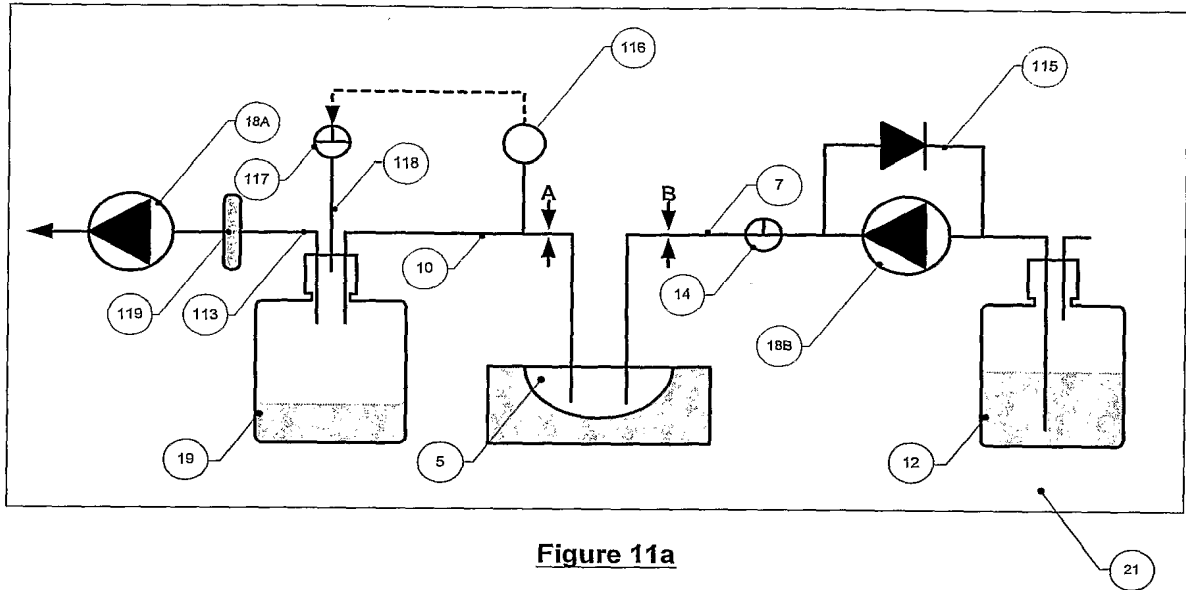


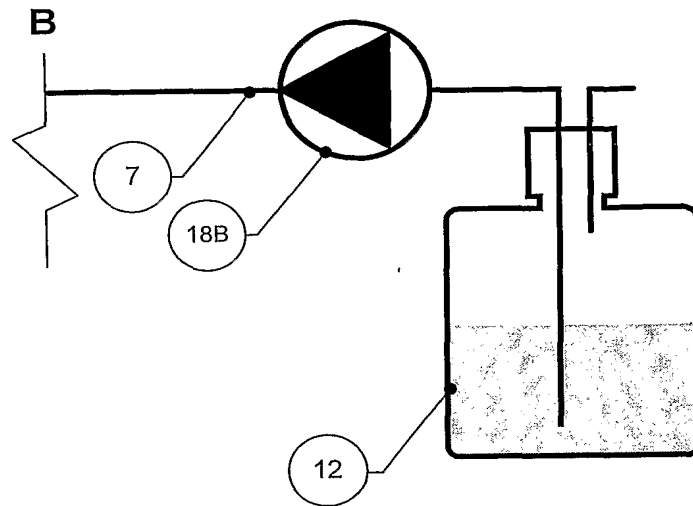



**Figure 11c**

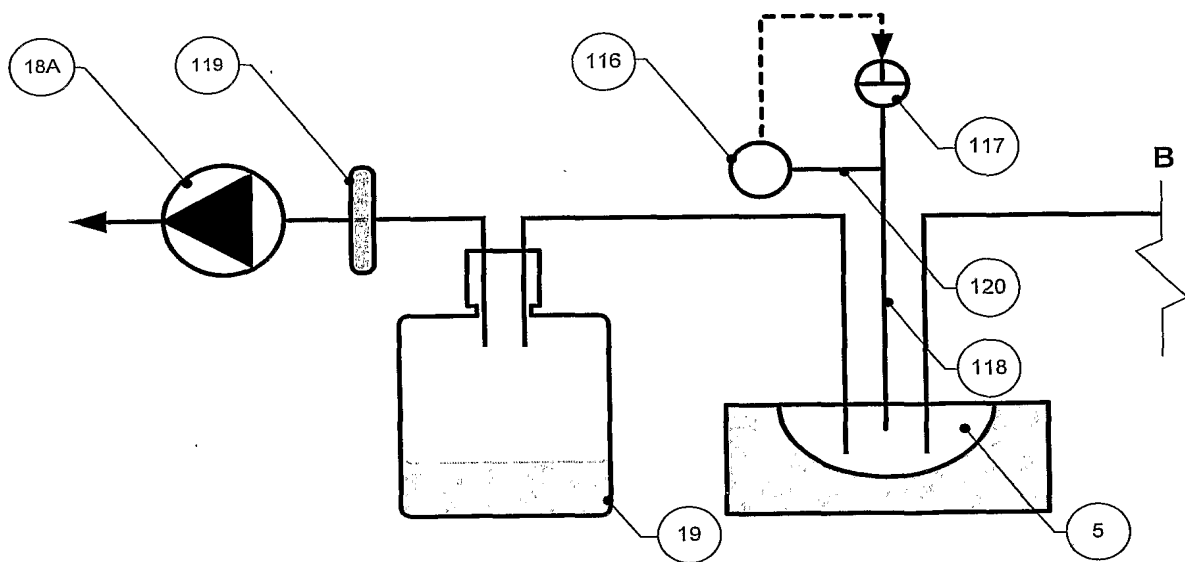

**Figure 11d**

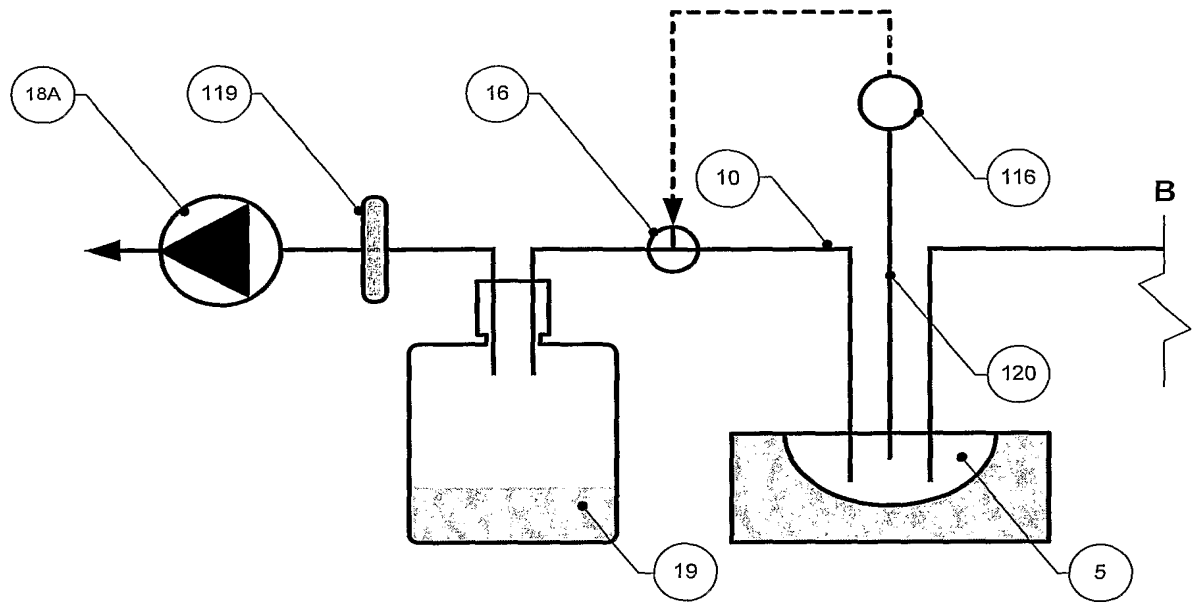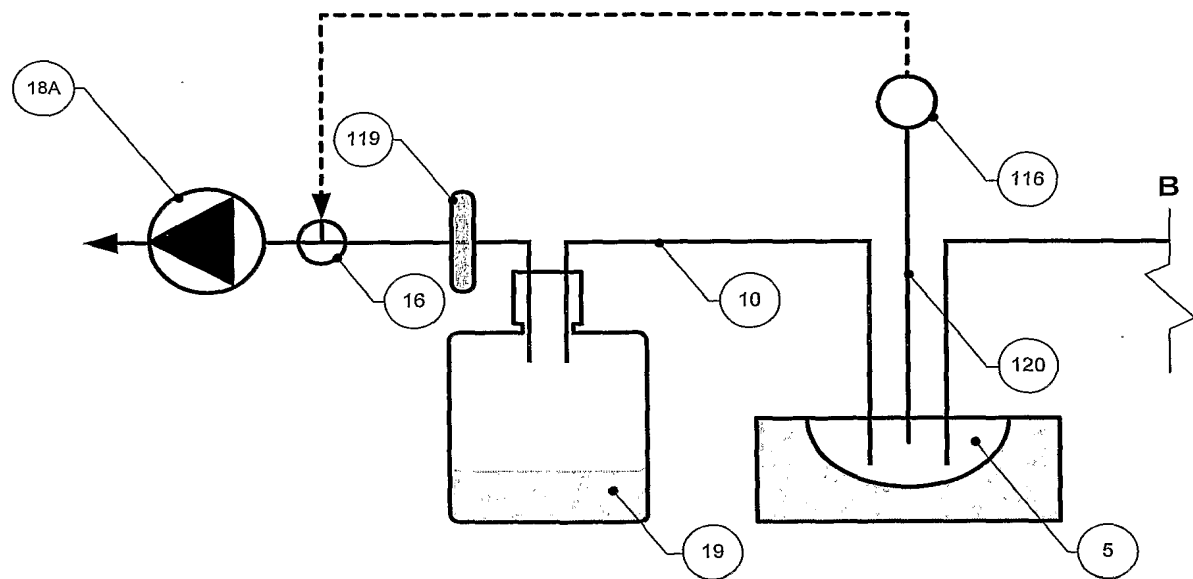

**Figure 12a****Figure 12b**

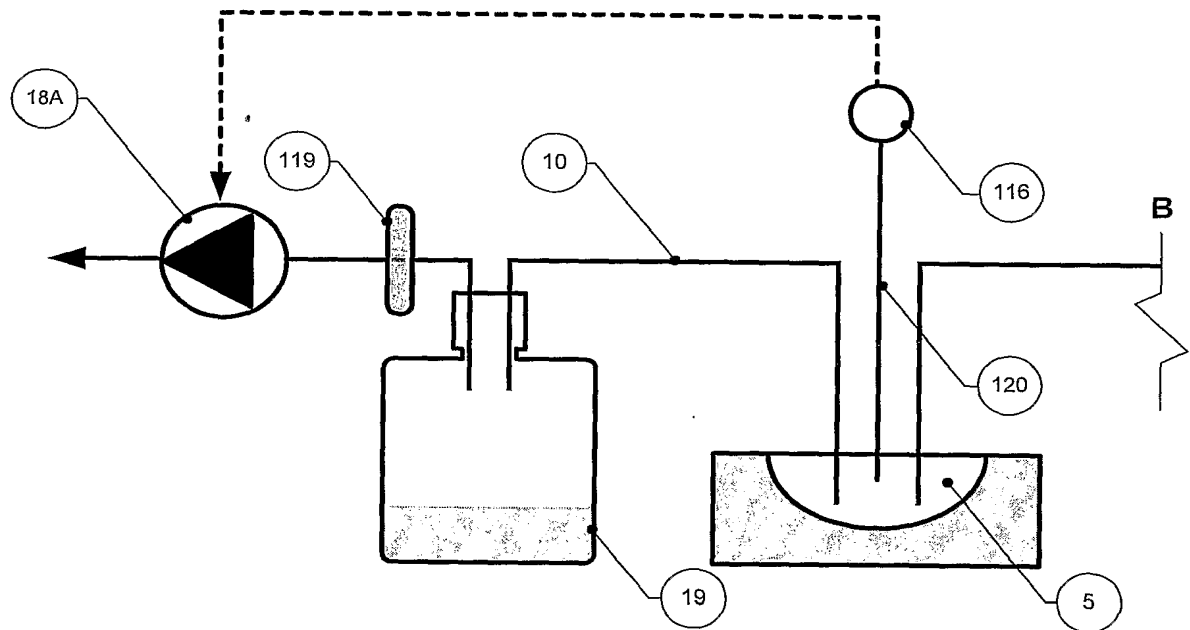

**Figure 12c**

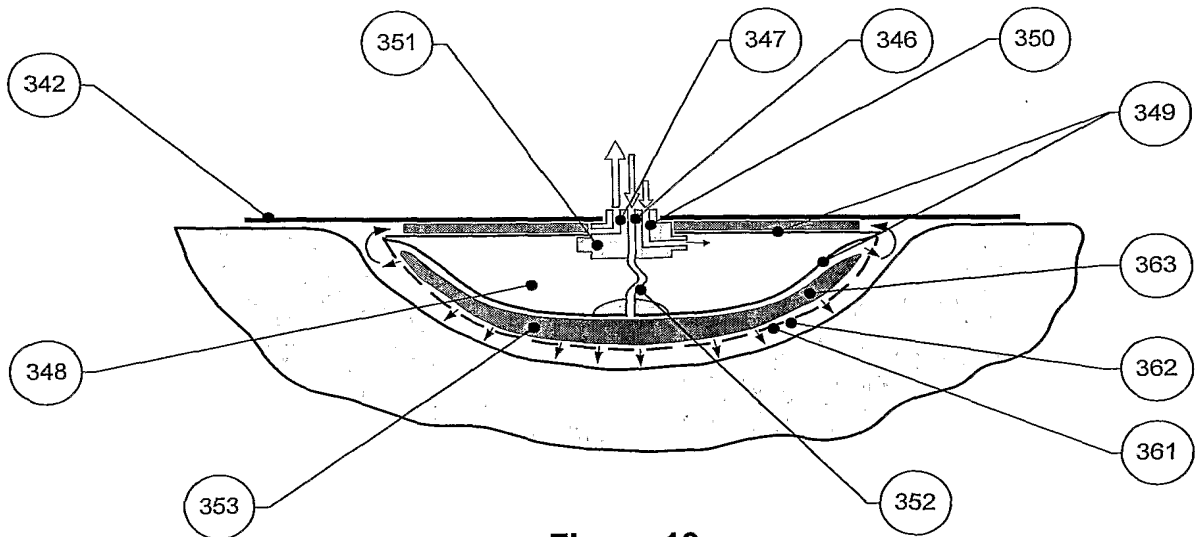


Figure 13a

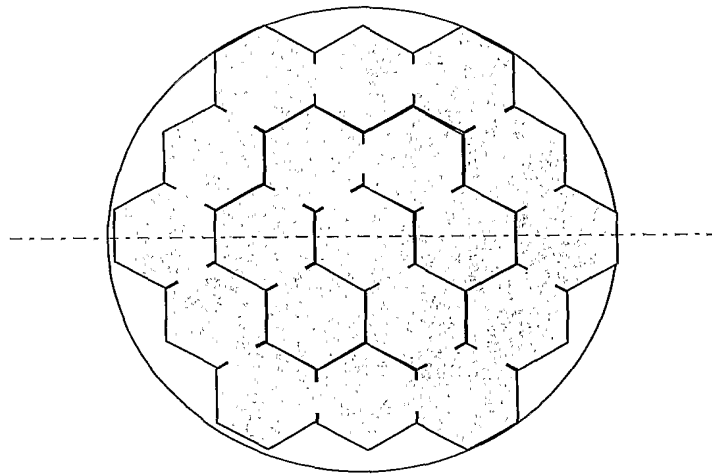


Figure 13b

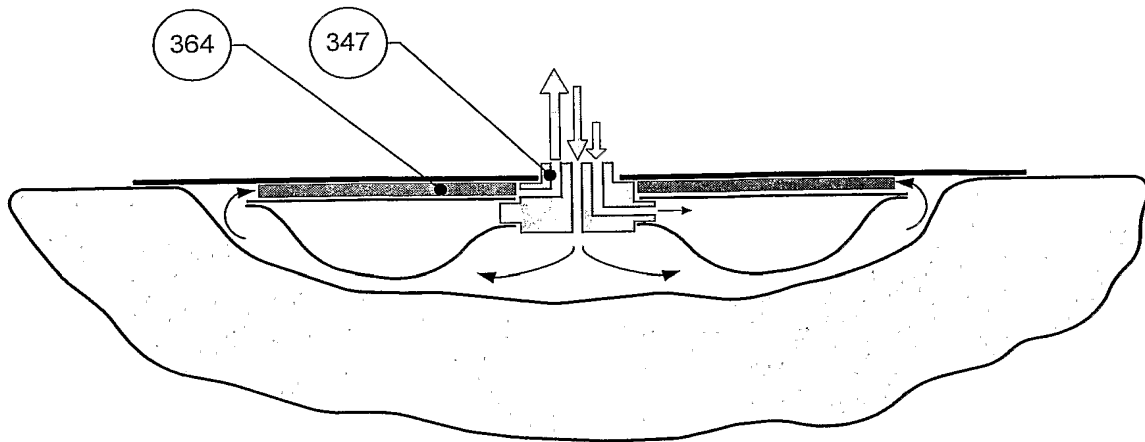


Figure 14



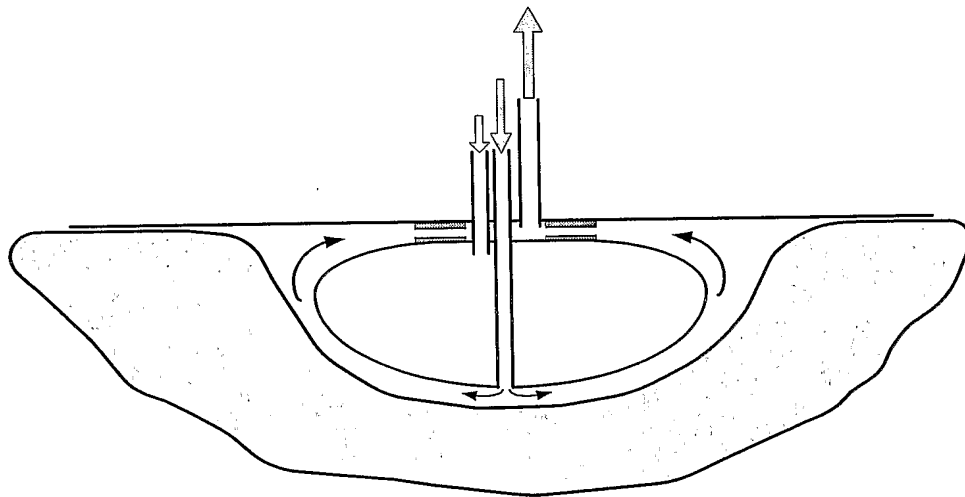


Figure 15

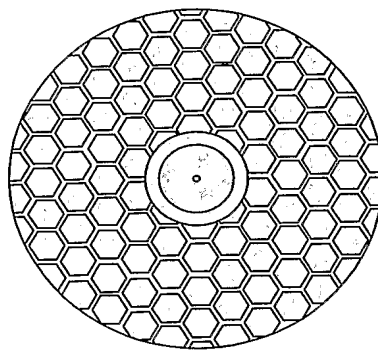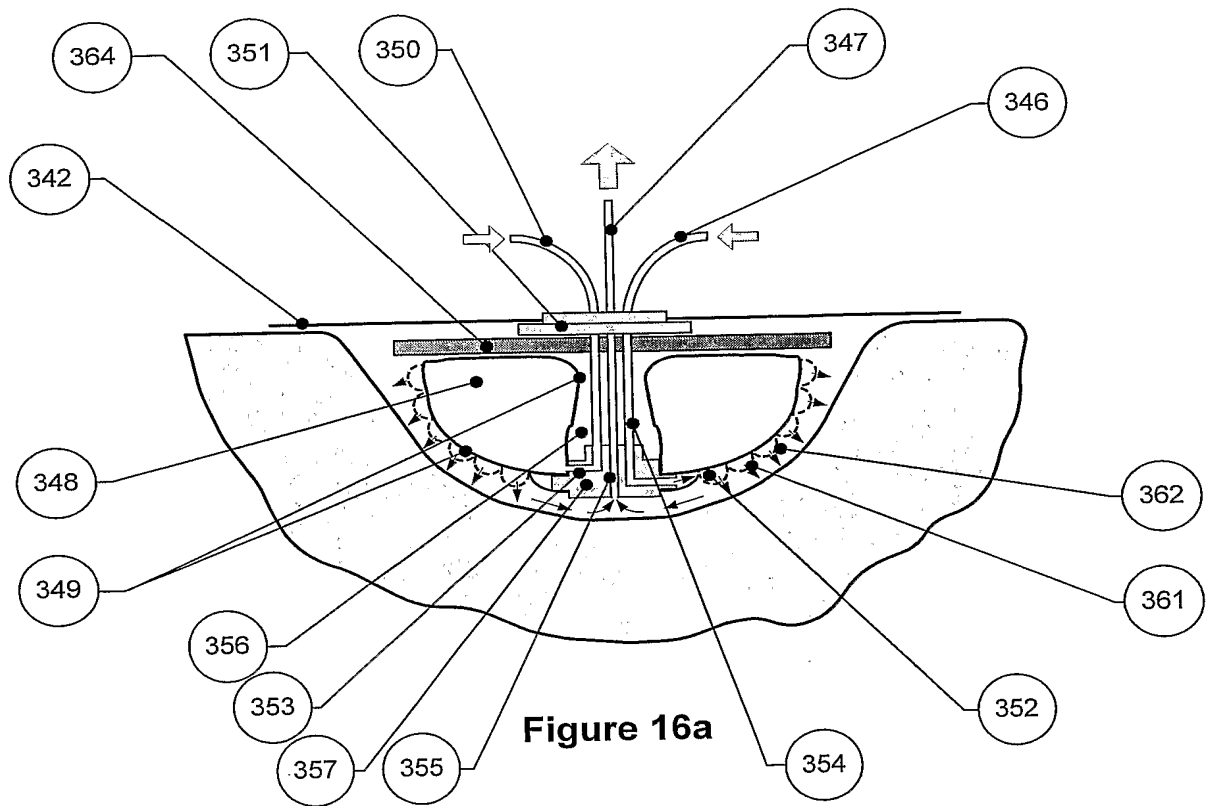

**Figure 16b**




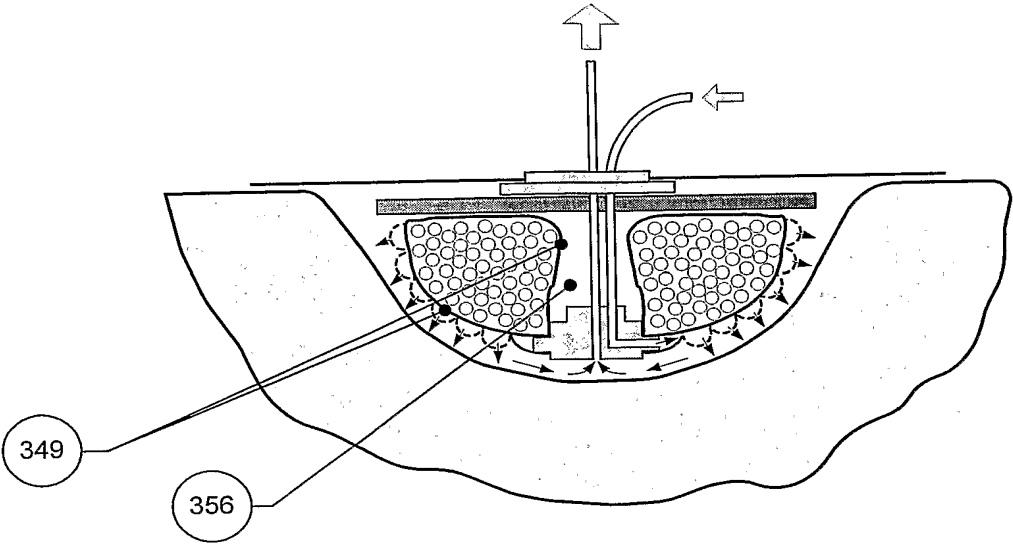


Figure 17

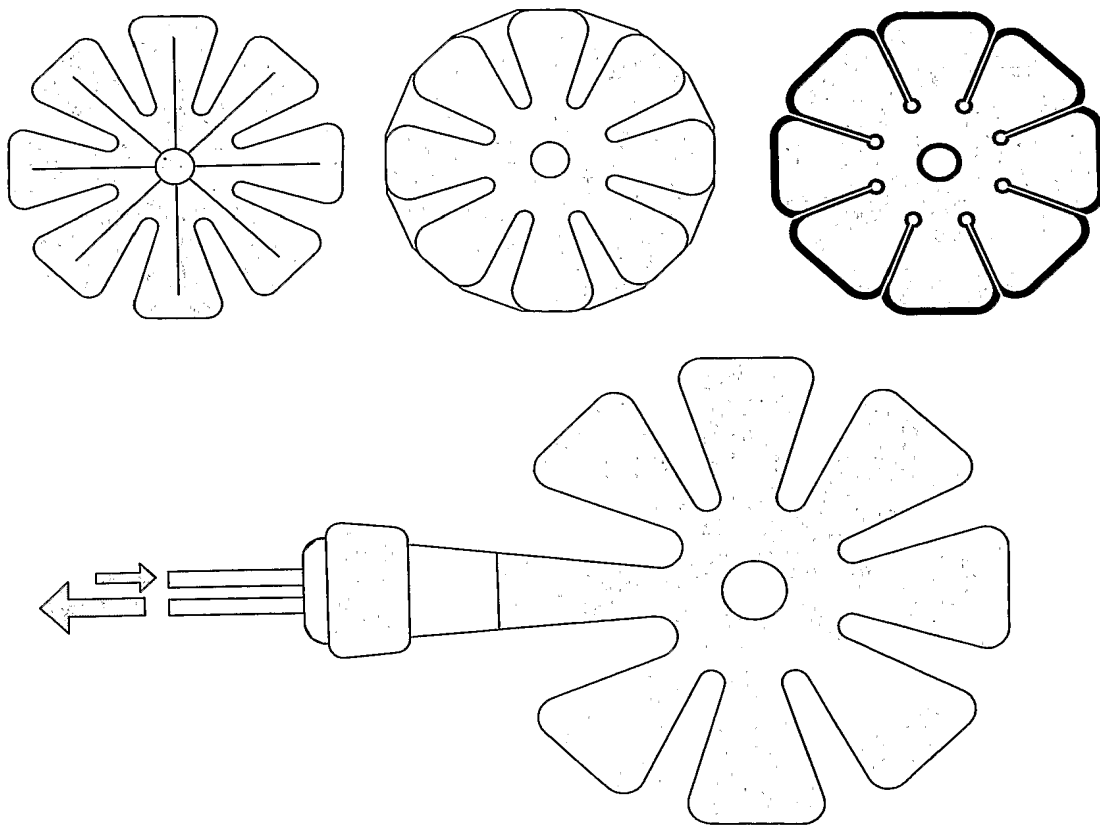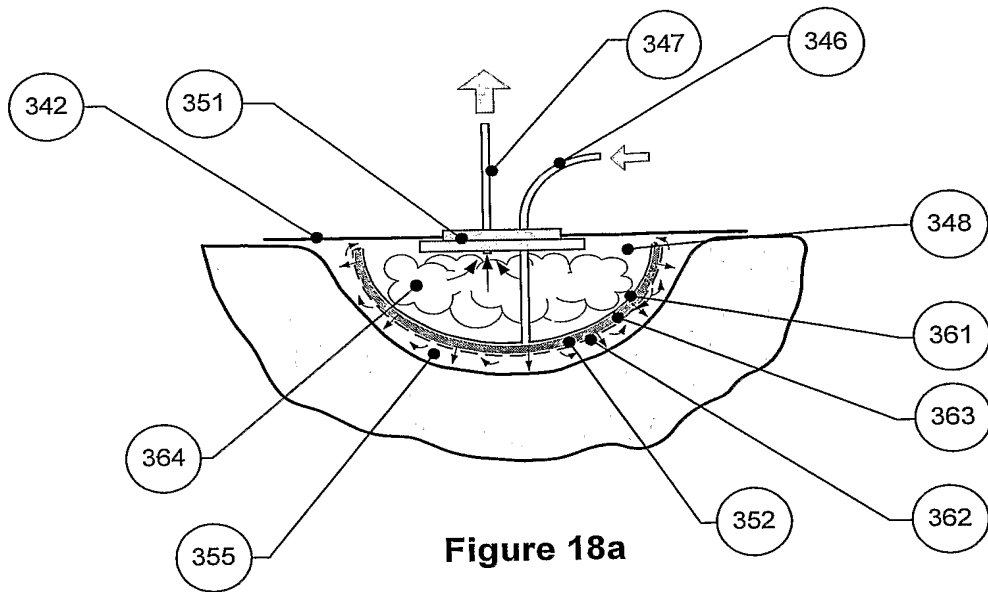

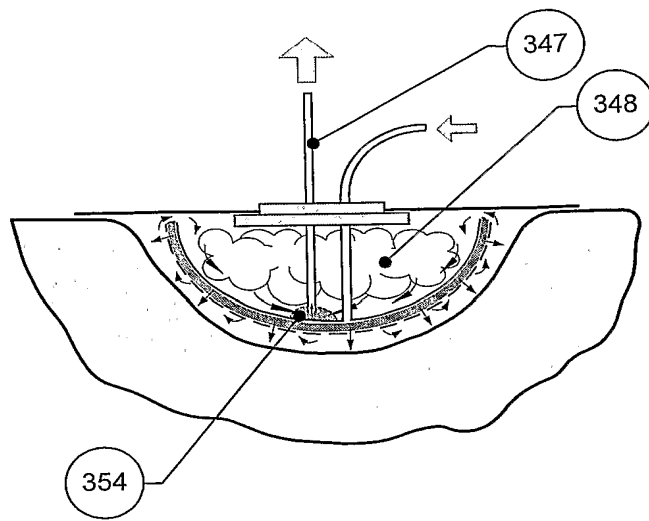

**Figure 19**



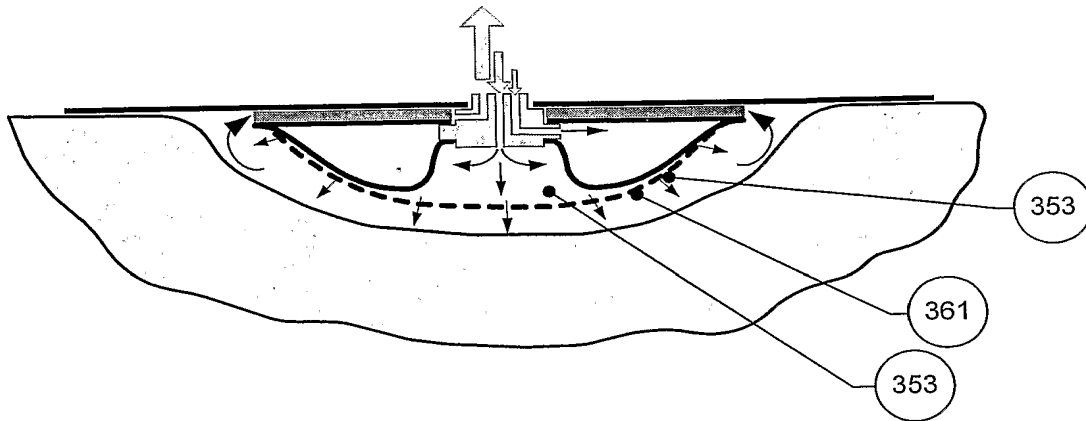


Figure 21

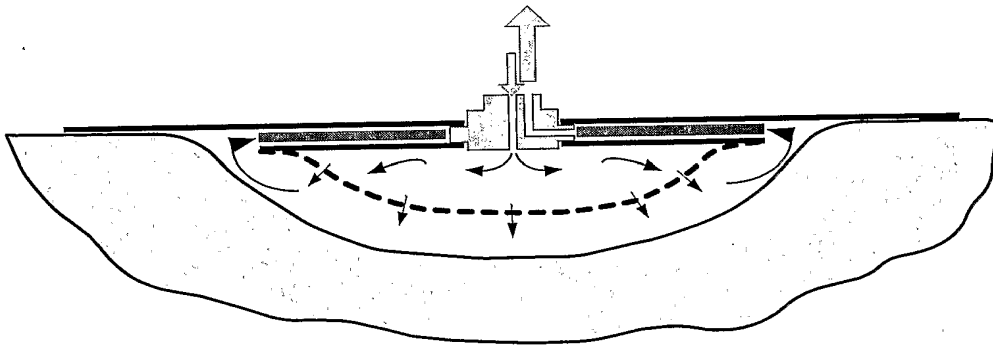


Figure 22

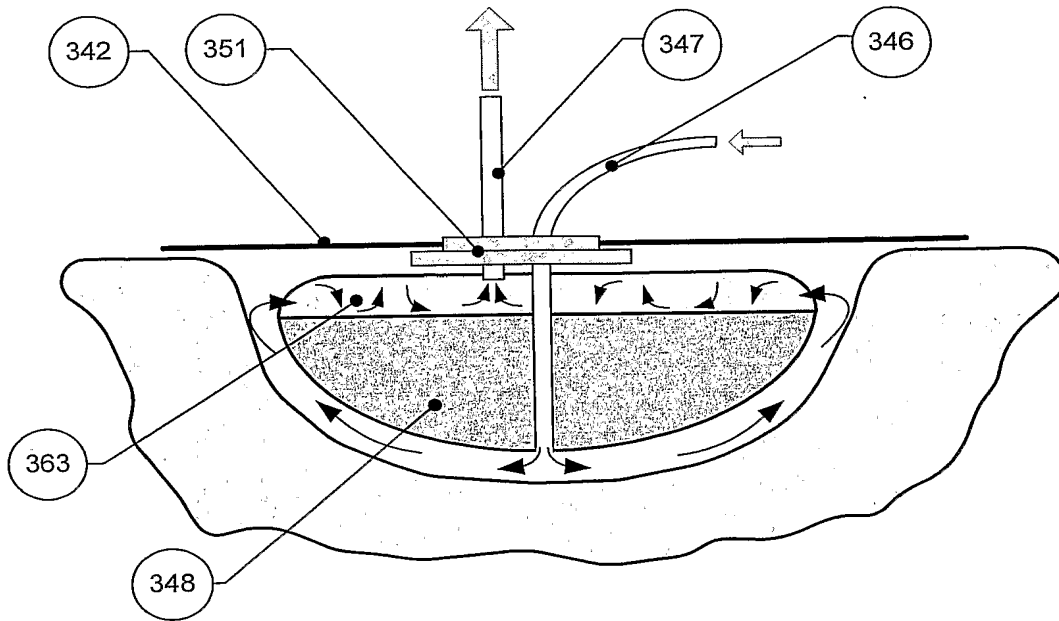


Figure 23

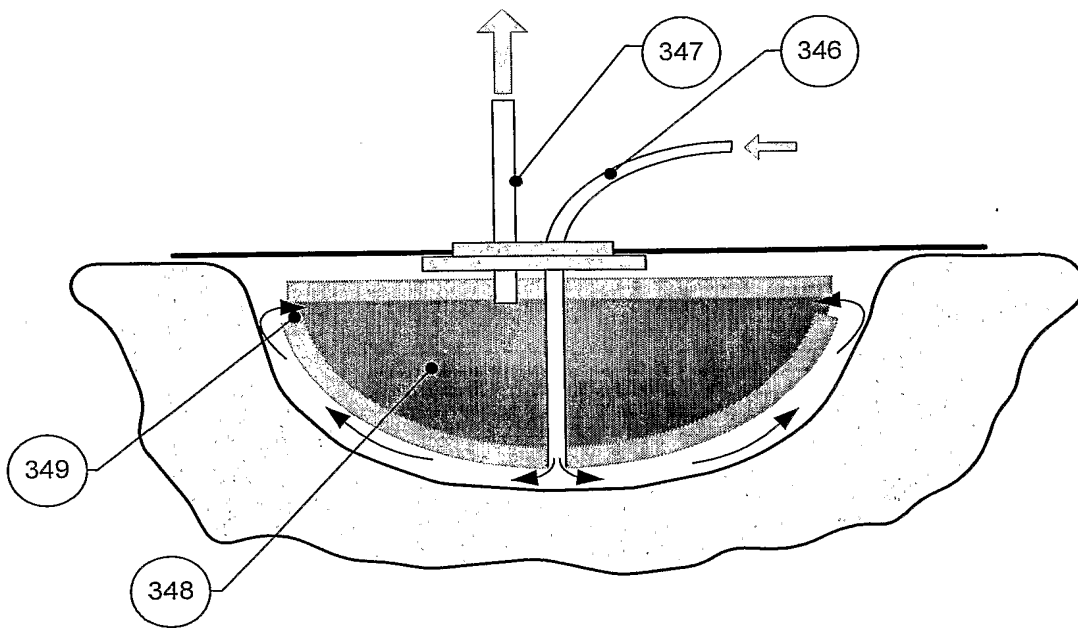


Figure 24

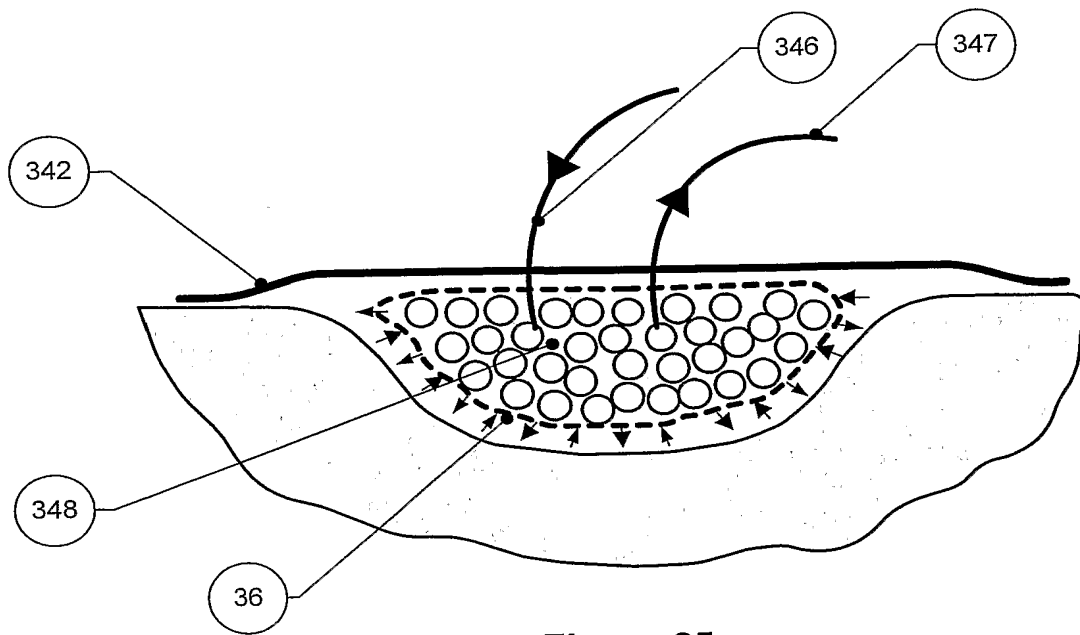


Figure 25





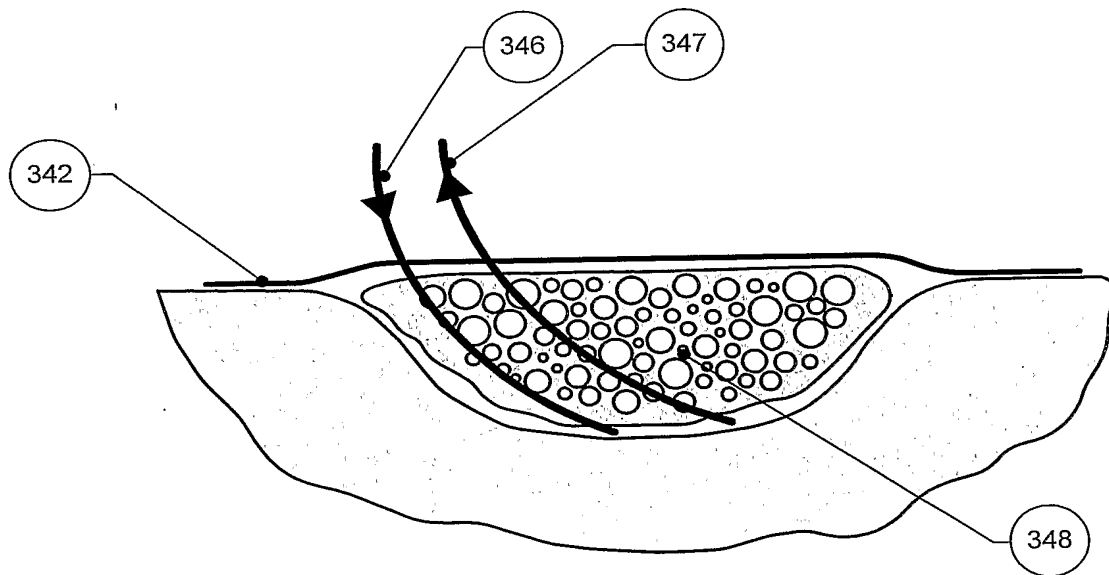


Figure 26

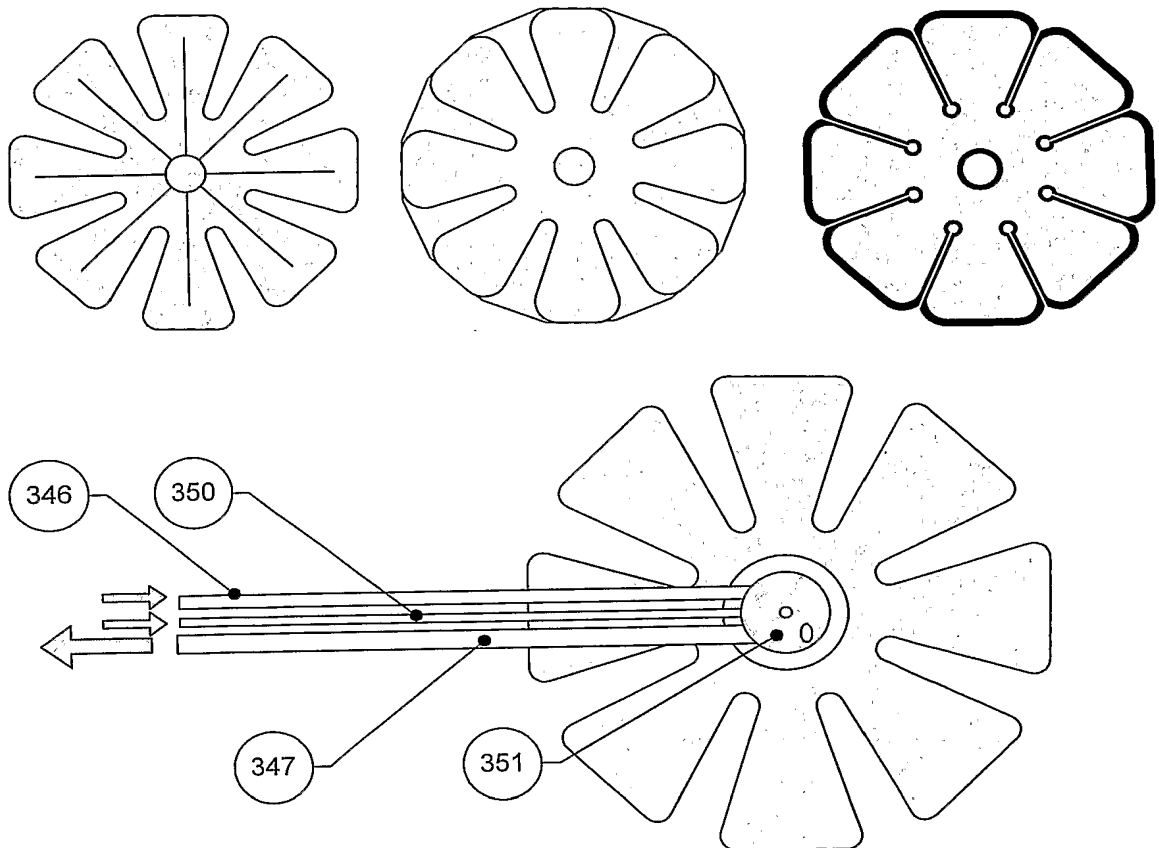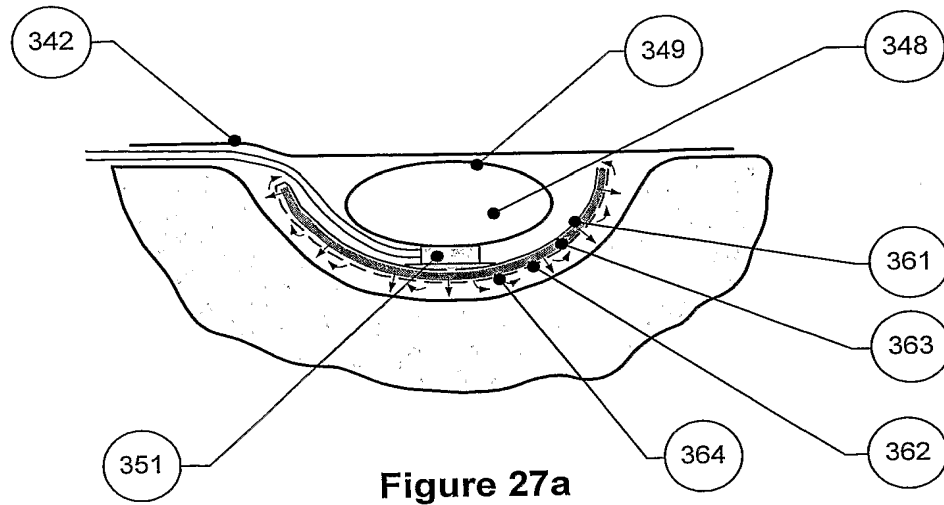


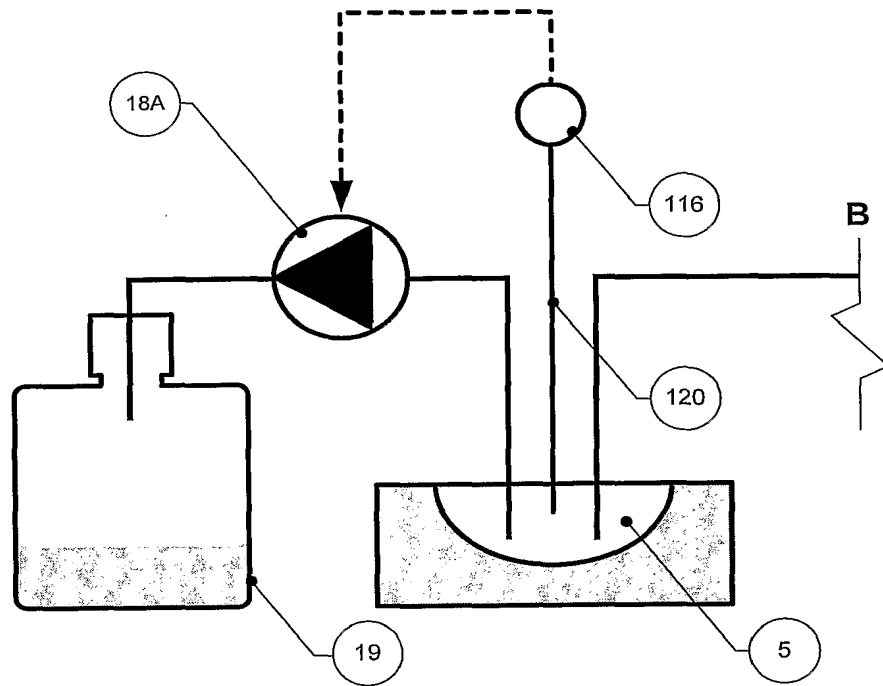


**Figure 28a**

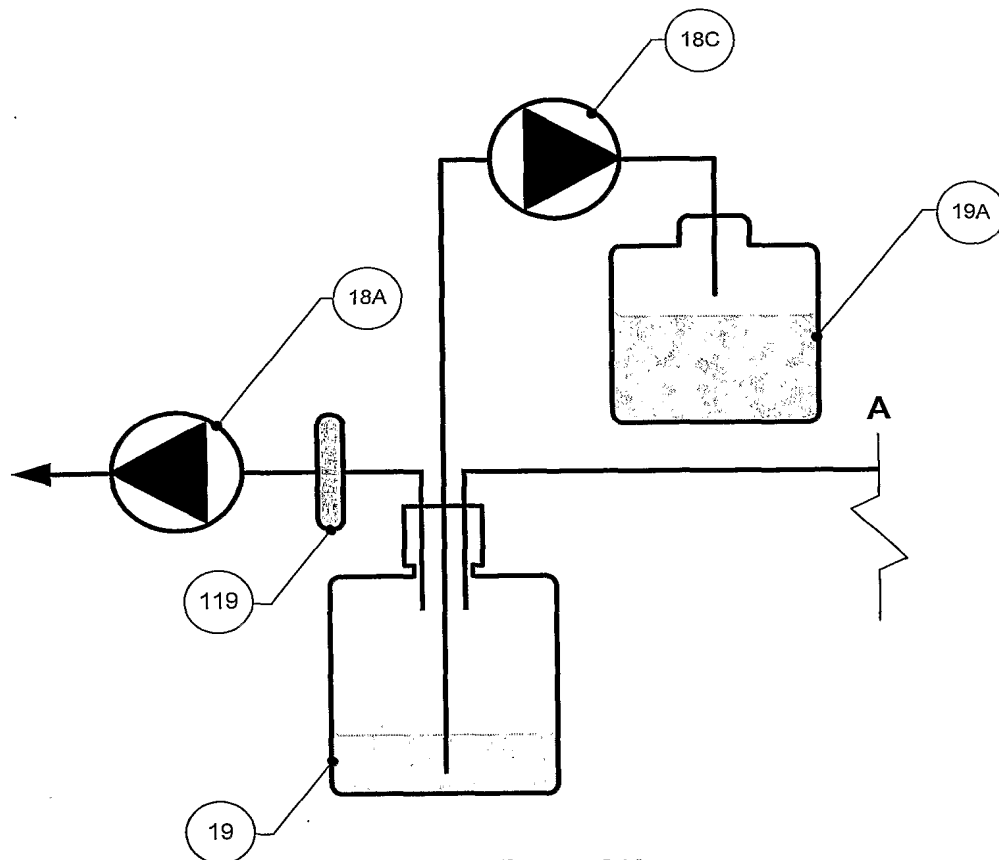

**Figure 28b**

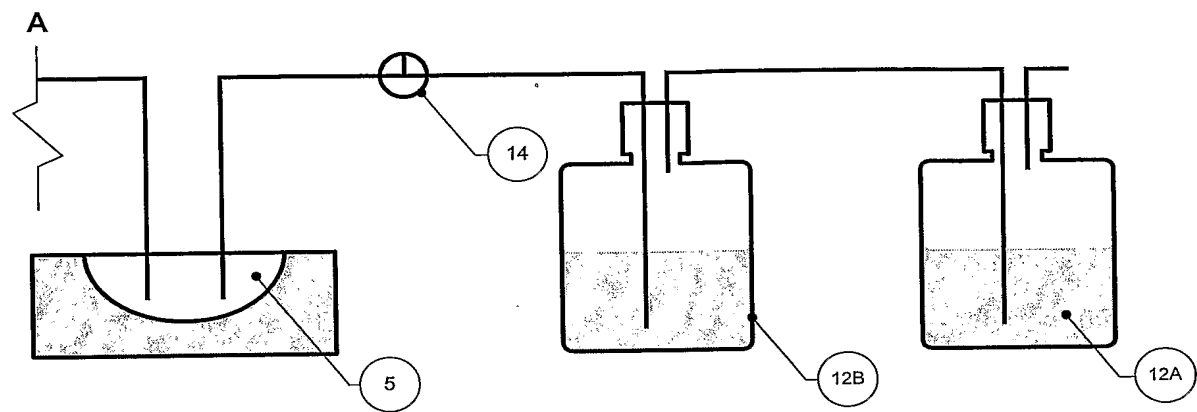

**Figure 29**

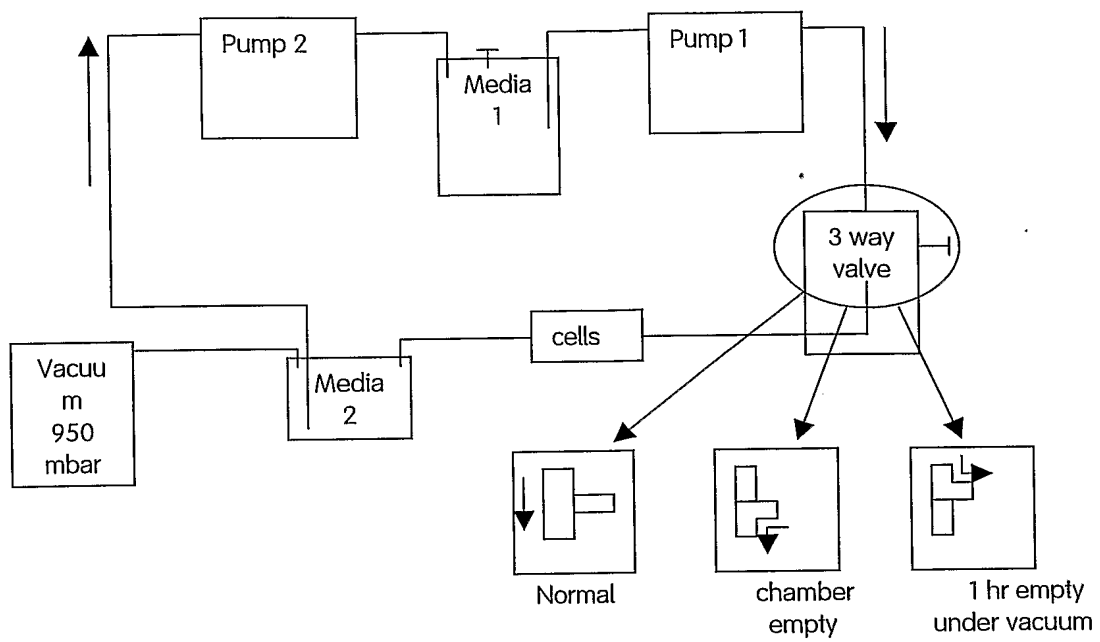**Figure 30**



# INTERNATIONAL SEARCH REPORT

PCT/GB2005/001612

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M3/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M A61H A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/021775 A1 (FREEMAN AMIHAY) 30 January 2003 (2003-01-30)	1-13
Y	paragraphs '0002!, '0003!, '0014!, '0022! - '0027!, '0073!, '0091!, '0094!, '0095!; figures 1,8,9	3-6
X	US 2002/161346 A1 (LOCKWOOD JEFFREY S ET AL) 31 October 2002 (2002-10-31)	1,2,7-13
Y	paragraphs '0014!, '0018!, '0019!, '0061!, '0116!	3-6
X	US 6 458 109 B1 (HENLEY ALAN WAYNE ET AL) 1 October 2002 (2002-10-01)	1,2,7-13
Y	the whole document	3-6
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 July 2005

Date of mailing of the international search report

27/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Borowski, A

# INTERNATIONAL SEARCH REPORT

PCT/GB2005/001612

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 39 35 818 A1 (NEHER, WOLFGANG, DR., 7750 KONSTANZ, DE) 2 May 1991 (1991-05-02) column 1, lines 41,42 column 2, line 11 - line 26 -----	1
A	DE 41 02 684 A1 (IONTO-COMED GMBH, 7500 KARLSRUHE, DE) 6 August 1992 (1992-08-06) the whole document -----	1

# INTERNATIONAL SEARCH REPORT

application No.  
PCT/GB2005/001612

## Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 14  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT – Method for treatment of the human or animal body by therapy: a method of treating wounds to promote wound healing.
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

PCT/GB2005/001612

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2003021775	A1	30-01-2003	EP 1443988 A1 WO 03011369 A1 US 2004186421 A1	11-08-2004 13-02-2003 23-09-2004
US 2002161346	A1	31-10-2002	US 2002082567 A1 US 2002065494 A1 AU 2002346521 A1 CA 2467837 A1 EP 1448261 A1 WO 03045492 A1 US 2005131327 A1 AU 1786902 A CA 2430313 A1 EP 1339366 A2 WO 0243634 A2 US 2004064111 A1	27-06-2002 30-05-2002 10-06-2003 05-06-2003 25-08-2004 05-06-2003 16-06-2005 11-06-2002 06-06-2002 03-09-2003 06-06-2002 01-04-2004
US 6458109	B1	01-10-2002	AT 288775 T AU 757347 B2 AU 5255599 A CA 2338443 A1 DE 69923689 D1 EP 1100574 A1 HU 0103545 A2 JP 2002524109 T NO 20010485 A PL 364754 A1 WO 0007653 A1	15-02-2005 20-02-2003 28-02-2000 17-02-2000 17-03-2005 23-05-2001 28-02-2002 06-08-2002 29-01-2001 13-12-2004 17-02-2000
DE 3935818	A1	02-05-1991	DE 4111122 A1	29-04-1993
DE 4102684	A1	06-08-1992	NONE	